


74030	2:1:1	150	.250	.450	.062	.014	.014	25	12	10	43.57
74035	2:1:1	600	1.0	1.5	.15	.074	.087	25	12	20	43.57
74040	2:1:1	1300	1.5	3.5	.45	.10	.13	25	12	30	43.57
74045	2:1:1	2400	2.2	6.0	1.14	.17	.20	25	12	40	43.57
74050	2:1:1	3700	3.4	9.0	2.07	.29	.32	25	12	50	43.57
74055	3:1:1	200	.617	1.0	.081	.018	.018	25	12	12	43.57
74060	3:1:1	800	1.2	1.5	.18	.035	.040	25	12	24	43.57
74065	3:1:1	1800	2.5	5.0	.37	.15	.16	25	12	36	43.57
74070	3:1:1	3200	4.5	10.0	.62	.25	.28	25	12	48	43.57
74075	3:1:1	5300	7.0	15.0	1.28	.25	.28	25	12	60	43.57
74080	3:3:1	200	200	1.0	.082	.096	.025	25	12	12	43.57
74085	3:3:1	800	1.0	1.5	.18	.22	.042	25	12	24	43.57
74090	3:3:1	1800	2.5	5.0	.58	.73	.28	25	12	36	43.57
74095	3:3:1	3200	4.5	10.0	.95	1.18	.55	25	12	48	43.57
74100	3:3:1	5300	7.0	15.0	1.56	1.78	.69	25	12	60	43.57
74105	4:2:1	200	.506	2.0	.047	.024	.019	25	12	12	43.57
74110	4:2:1	800	1.5	3.0	.18	.071	.041	25	12	24	43.57
74115	4:2:1	1800	3.0	5.5	.46	.28	.16	25	12	36	43.57
74120	4:2:1	3200	5.5	10.0	.77	.46	.25	25	12	48	43.57
74125	4:2:1	5300	8.0	15.0	1.25	.72	.40	25	12	60	43.57

SIZE 2											
PICO PART #	TURNS RATIO TOLER. ±5%	Lm TYPICAL µH	LEAKAGE IND. VALUE IN µH TYPICAL		WINDING RESISTANCE MAX VALUE IN OHMS			TYPICAL INTER-WINDING CAP VALUE IN pF		E.T. RATING VOLT - µSEC MIN. PRIMARY	PRICE (1-9)
			LL (N1-N2)	LL (N1-N3)	R(N1)	R(N2)	R(N3)	C1 (N1-N2)	C2 (N1-N3)		
74210	1:1:1	250	.350	.712	.038	.046	.048	35	18	16	43.57
74215	1:1:1	1000	.650	1.2	.12	.15	.17	35	18	32	43.57
74220	1:1:1	2250	1.5	3.0	.28	.32	.37	35	18	48	43.57
74225	1:1:1	4000	2.5	5.0	.59	.66	.74	35	18	65	43.57
74230	1:1:1	6200	4.0	8.0	1.27	1.48	1.56	35	18	80	43.57

74235	2:1:1	250	.400	.815	.038	.014	.015	35	18	16	43.57
74240	2:1:1	1000	.800	1.6	.12	.044	.049	35	18	32	43.57
74245	2:1:1	2250	1.8	3.6	.28	.11	.13	35	18	48	43.57
74250	2:1:1	4000	3.2	6.4	.59	.17	.20	35	18	65	43.57
74255	2:1:1	6200	5.0	10.0	1.26	.29	.31	35	18	80	43.57
74260	3:1:1	350	.400	.900	.036	.017	.023	35	18	19	43.57
74265	3:1:1	1400	1.1	2.2	.15	.035	.039	35	18	38	43.57
74270	3:1:1	3000	2.4	5.0	.42	.062	.068	35	18	57	43.57
74275	3:1:1	5500	4.2	8.0	.75	.23	.24	35	18	76	43.57
74280	3:1:1	9000	6.5	10.0	1.02	.39	.41	35	18	95	43.57
74285	3:3:1	350	.450	1.0	.063	.068	.049	35	18	19	43.57
74290	3:3:1	1400	1.2	2.6	.15	.17	.065	35	18	38	43.57
74295	3:3:1	3000	2.5	5.0	.42	.48	.089	35	18	57	43.57
74300	3:3:1	5500	4.5	9.0	.94	1.14	.43	35	18	76	43.57
74305	3:3:1	9000	7.0	14.0	1.54	1.74	.64	35	18	95	43.57
74310	4:2:1	350	.700	1.64	.040	.023	.014	35	18	19	43.57
74315	4:2:1	1400	1.3	2.7	.12	.067	.035	35	18	38	43.57
74320	4:2:1	3000	2.7	5.5	.42	.12	.070	35	18	57	43.57
74325	4:2:1	5500	4.8	9.0	.94	.27	.15	35	18	76	43.57
74330	4:2:1	9000	7.5	15.0	1.53	.35	.19	35	18	95	43.57

SIZE 3											
PICO PART #	TURNS RATIO TOLER. ±5%	Lm TYPICAL µH	LEAKAGE IND. VALUE IN µH TYPICAL		WINDING RESISTANCE MAX VALUE IN OHMS			TYPICAL INTER-WINDING CAP VALUE IN pF		E.T. RATING VOLT - µSEC MIN. PRIMARY	PRICE (1-9)
			LL (N1-N2)	LL (N1-N3)	R(N1)	R(N2)	R(N3)	C1 (N1-N2)	C2 (N1-N3)		
74515	1:1:1	300	.300	.400	.044	.048	.054	45	25	25	43.57
74520	1:1:1	1200	1.25	1.9	.095	.11	.13	45	25	50	43.57
74525	1:1:1	2700	1.75	4.2	.22	.26	.29	45	25	75	43.57
74530	1:1:1	4800	3.0	7.3	.46	.52	.59	45	25	100	43.57
74535	1:1:1	7500	4.6	11.4	.81	.90	.99	45	25	125	43.57
74540	2:1:1	300	.514	.630	.044	.013	.017	45	25	25	43.57
74545	2:1:1	1200	.900	1.7	.095	.043	.047	45	25	50	43.57
74550	2:1:1	2700	2.0	3.7	.22	.10	.12	45	25	75	43.57
74555	2:1:1	4800	3.0	6.5	.46	.17	.19	45	25	100	43.57
74560	2:1:1	7500	4.88	10.0	.80	.28	.34	45	25	125	43.57
74565	3:1:1	400	.686	.800	.049	.011	.011	45	25	30	43.57
74570	3:1:1	1600	1.25	3.0	.12	.035	.038	45	25	60	43.57
74575	3:1:1	3600	2.75	6.5	.33	.062	.068	45	25	90	43.57
74580	3:1:1	6400	4.6	1.20	.58	.14	.15	45	25	120	43.57
74585	3:1:1	10,000	7.2	18.0	1.25	.13	.15	45	25	150	43.57

74590	3:3:1	400	.400	1.02	.062	.072	.012	45	25	30	43.57
74595	3:3:1	1600	1.25	1.5	.12	.14	.040	45	25	60	43.57
74600	3:3:1	3600	3.0	2.9	.33	.38	.070	45	25	90	43.57
74605	3:3:1	6400	5.3	5.0	.58	.73	.18	45	25	120	43.57
74610	3:3:1	10,000	8.2	7.8	1.35	1.40	.20	45	25	150	43.57
74615	4:2:1	400	.580	1.12	.054	.016	.009	45	25	30	43.57
74620	4:2:1	1600	1.2	3.0	.12	.052	.028	45	25	60	43.57
74625	4:2:1	3600	2.75	7.0	.33	.15	.084	45	25	90	43.57
74630	4:2:1	6400	4.6	12.0	.58	.14	.080	45	25	120	43.57
74635	4:2:1	10,000	7.1	19.6	1.22	.27	.15	45	25	150	43.57

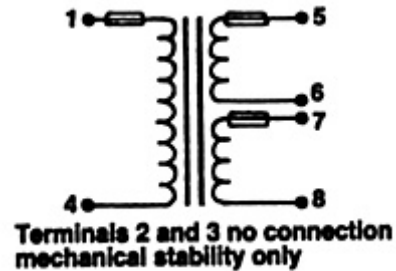

For immediate engineering assistance or to place an order: **Call Toll Free: 800-431-1064**

PICO Electronics, Inc.

143 Sparks Ave. Pelham, NY 10803-1810
Tel: 914-738-1400 or Fax: 914-738-8225

[Go back to Thru Hole Transformers and Inductors menu](#)