
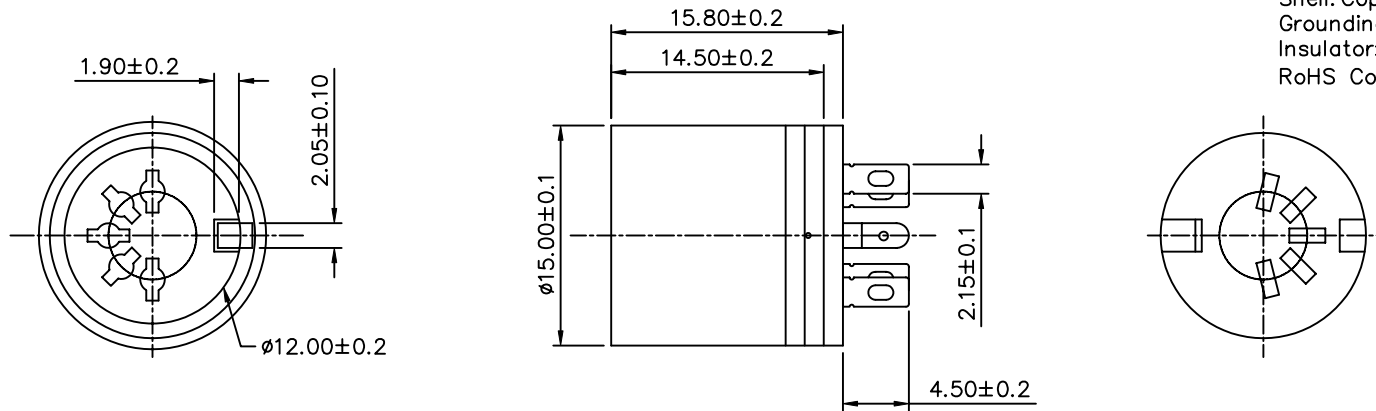



SPECIFICATIONS

Current Rating: 1 Amp Max.
 Dielectric Withstanding Voltage: 500V AC For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min. At DC 500V
 Total Mating Force: 5.5 Kgf Max.
 Total Unmating Force: 1.0 Kgf Min.
 Temperature Range: -55°C~+105°C
 Contact: Copper Alloy, t=0.60mm, Tin Plated
 Shell: Copper Alloy, t=0.40mm, Nickel Plated
 Grounding Strip: Stainless Steel, t=0.20mm, Tin Plated
 Insulator: P.B.T, UL 94V-0 Rated, Black
 RoHS Compliant



△

No. Of Contacts	5(180°)	8(270°)
Part No.	DM05S	DM08S
Position		

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
PART No. DMXXS-H		MEI			.X ±0.3			
DRAWING No. DMXXS-H		CHECKED BY BECKY		.XX ±0.20				
SCALE NONE		DRAWING BY HZF		.XXX ±0.100	△ B1	Del Pin	EMILY	12/19/2008
REV. B1		UNIT mm		ANG. ±1°	△ B0	NEW RELEASE	BECKY	12/21/2005
					NO. REV.	REVISIONS	CHK	DATE