



LEDTRONICS[®]
America's Premium Brand LED Company™

23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579-4875 or (310) 534-1505 Fax: (310) 534-1424
E-mail: info@ledtronics.com
Website: http://www.ledtronics.com

LED15T5-1Wxxx-XHW-001A (SERIES)

LED Light Bulb, Clear, E12, E14, Ba15S & Ba15D Base
120Vac, Angle of illumination: 360°
Halogen White(2700K), Natural White(4000K)



LED15T5-1WE12-XHW-001A



LED15T5-1WE14-XHW-001A



LED15T5-1WE17-XHW-001A



LED15T5-1WSCB-XHW-001A
LED15T5-1WDCB-XHW-001A

DWG BY:
SEC / GP / HF
08-03-15

R&D:
UF
04-23-21

QA:
SB
04-26-21

MFG:
LD
04-23-21

REVISION LTR: D
ECR#: 042221-UF01
04-23-21

○ Features

Operating Temperature	-30°C to +50°C
Base Material	Nickel Plated Brass
Lens Material / Color	Polycarbonate / Clear
LED Qty.	7 pcs.
LED LM80 Report	-
LM79 Report	-
Lifespan	50,000 hrs.
Dimmable	No
Warranty	2 Years
Weight	0.01 lbs. / 0.2 oz

Made in USA




from Imported Parts



○ Electro-Optical Characteristics

Part Number	LED15T5-1WE12-XHW-001A LED15T5-1WE14-XHW-001A LED15T5-1WE17-XHW-001A LED15T5-1WSCB-XHW-001A LED15T5-1WDCB-XHW-001A
Input Voltage	80Vac~130Vac
Tested @ (Voltage)	120Vac
Power Consumption	1.0~1.5W
Current Consumption	0.013~0.019 A
Efficacy: (Lm/W)	69~104
Lumens	104 lm
Luminous Intensity	1.12cd-1.31cd
Power Factor	0.5
CRI (Ra)	-
CCT	2700K~3000K
Color	Halogen White
Angle of illumination	360°


○ **Dimensions**

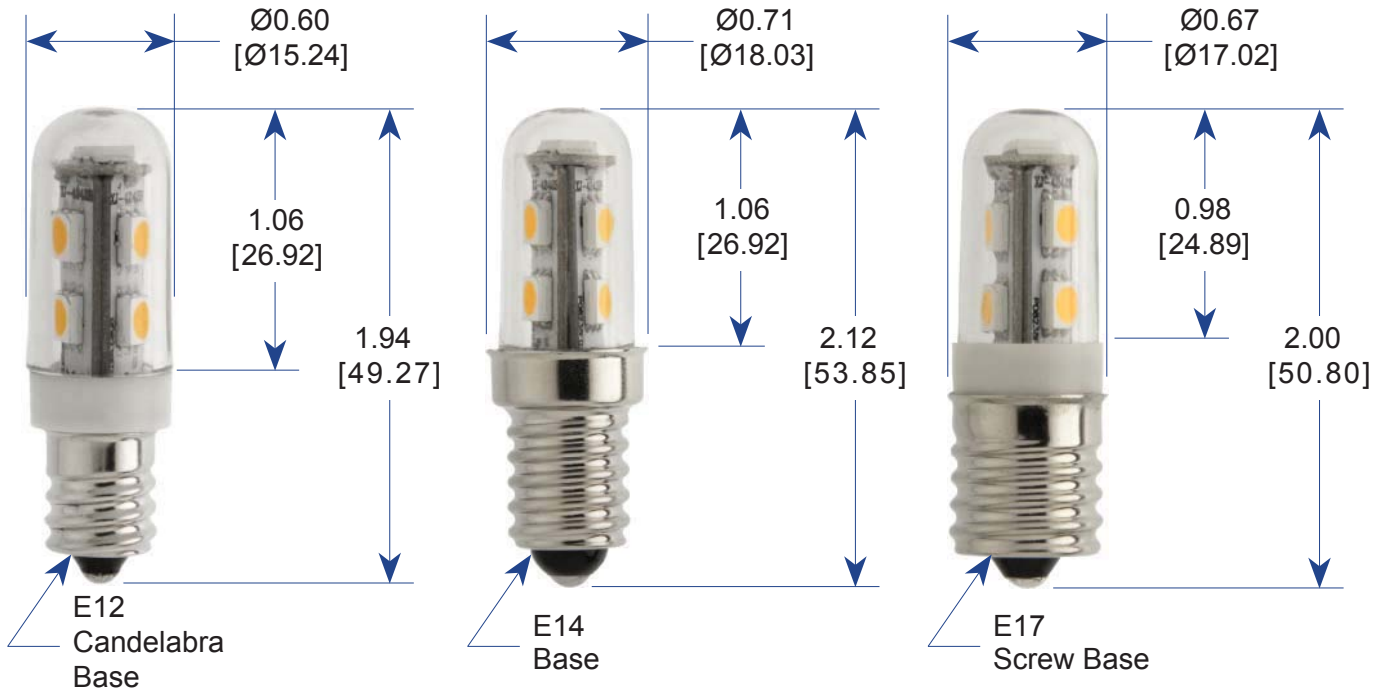

LED15T5-1WE12-XHW-001A

LED15T5-1WE14-XHW-001A

LED15T5-1WE17-XHW-001A

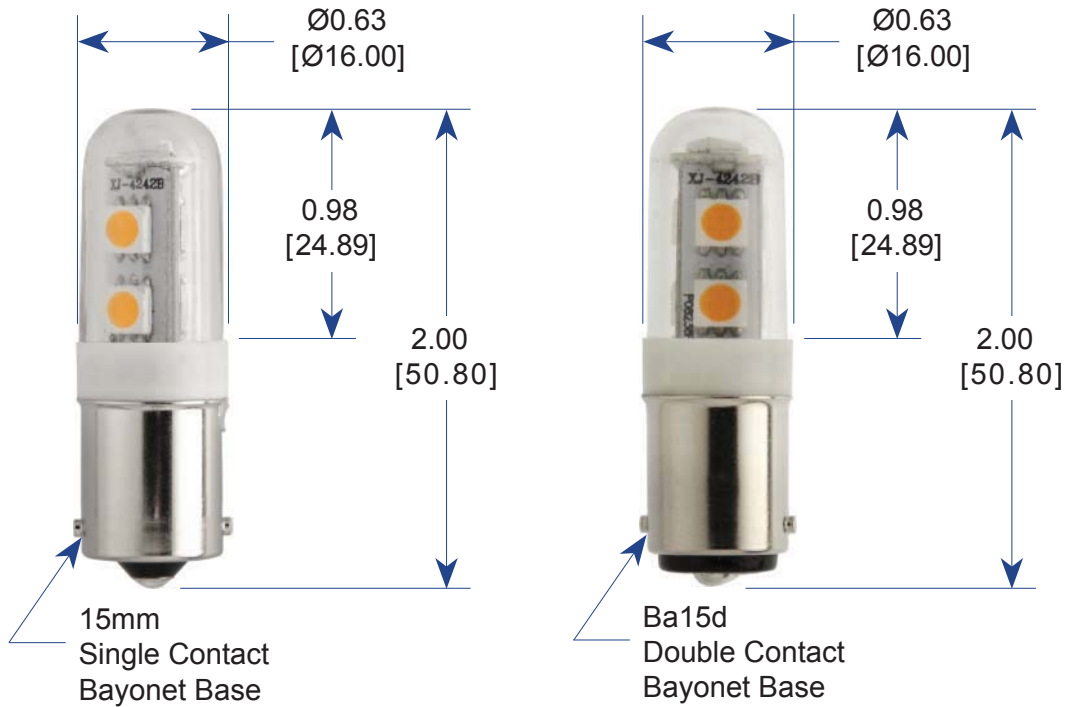

LED15T5-1WSCB-XHW-001A

LED15T5-1WDCB-XHW-001A