



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART #		TAB SIZE	WIRE RANGE mm <sup>2</sup>	DIMENSIONS mm		
PREFIX	PK			A $\pm 0,38$	B $\pm 0,25$	C $\pm 0,25$
DM6-63	-L -D	6,35 X 0,81 (.250 X .032)	2,5-6,0	18,2 (.72)	7,6 (.30)	3,0 (.12)



NOTES:

- USED FOR:
  - STRANDED COPPER WIRE ONLY
- MATERIAL:
  - STAMPING - 0,46mm (.02) THK BRASS, TIN PLATED
  - SLEEVE - BRASS, TIN PLATED
- FIRST INSERTION FORCE - 53 N (12 LB) MAX  
 FIRST WITHDRAWAL FORCE - 53 N (12 LB) MAX  
 27 N (6 LB) MIN
- DIMENSIONS IN BRACKETS ARE IN INCHES
- PACKAGE QTY:
  - STD: L=50
  - BULK: D=500
- WIRE STRIP LENGTH: 7,1  $\begin{smallmatrix} +,8 \\ -0 \end{smallmatrix}$  (9/32  $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ )
- INSTALLATION TOOLS: REF. DWGS. A41522, A41523, A41524, A41525

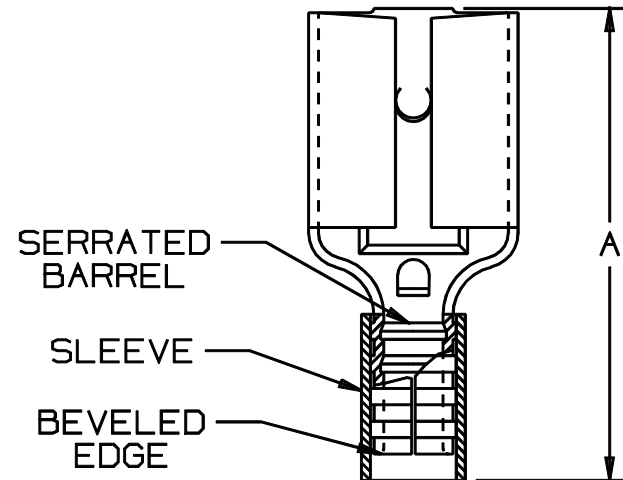

A41438\_03

03	10/97	TM		CHANGED DECIMAL POINTS TO COMMAS				PANDUIT CORP. TINLEY PARK, ILLINOIS
02	1/97	TM	RLS	UPDATE DIMENSIONS FILESPEC WAS NPC_A41438_01	05478	LA	DBH	
01	4/94	SM	JW	REMOVED CURL FLOOR SLOTS	02215	LA	TJM	
00	11/91	BK	RLS	RELEASED	00687	LA	KRS	
REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	PM	DRAWN BY BDK Ck'D SCALE NONE DRAWING NO. A41438

NON-INSULATED, SLEEVED BARREL FEMALE  
 METRIC DISCONNECT (6,4mm X 0,81mm TAB SIZE)  
 2,5-6,0mm<sup>2</sup> BARREL