


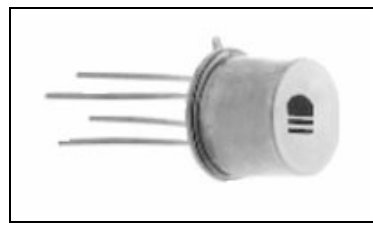

JTS7-1Y Product Details

[Share](#) | [Print](#) | [Email](#)


High Performance Solid State Relays

Not EU RoHS or ELV Compliant

Product Highlights:

- Output Voltage Rating (DC Relays) = 250 VDC
- Output Current Rating = .1 A
- Insulation - Initial Dielectric Between Contacts and Coil = 1000 V rms
- Input Voltage = 3.8 - 32 VDC
- Input Current Max. @ 5Vdc = 22 VDC

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

JTS7-1Y

(1-1617544-3)

TE Internal Number: 1-1617544-3

Pending Obsolescence

[Contact Product Information Center](#)

[Add to My Part List](#)
[Request Sample](#)
[Find Similar Products](#)
[Buy Product](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • None Available <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • RELAY (PDF, English) <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
---	--

[List all Documents](#)

Feedback

Product Features (Please use the Product Drawing for all design activity)

<p>Mechanical Attachment:</p> <ul style="list-style-type: none"> • Mounting Options = PC Board <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Output Voltage Rating (DC Relays) (VDC) = 250 • Output Current Rating (A) = 0.1 • Insulation - Initial Dielectric Between Contacts and Coil (V rms) = 1000 • Input Voltage (VDC) = 3.8 - 32 • Input Current Max. @ 5Vdc (VDC) = 22 • Shock = 1500G's, 0.5ms • Vibration = 100G's, 10 to 3000Hz <p>Termination Features:</p> <ul style="list-style-type: none"> • Termination Type = Through Hole 	<p>Body Features:</p> <ul style="list-style-type: none"> • Screening Level = Y • Enclosure Type = Sealed • Packaging Style = TO-5 <p>Industry Standards:</p> <ul style="list-style-type: none"> • Government/Industry Qualification = Yes • Government/Industry Part Number = M28750/7-001Y • RoHS/ELV Compliance = Not ELV/RoHS compliant • Lead Free Solder Processes = Not suitable for lead free processing <p>Environmental:</p> <ul style="list-style-type: none"> • Operating Temperature Range (°C) = -55 - +125 <p>Other:</p> <ul style="list-style-type: none"> • Additional Features = None • Brand = CII
---	--

Corporate Information | Quick Links | Customer Support | Keep Me Informed

- Corporate Information**
- [About TE](#)
 - [Investors](#)
 - [News Room](#)
 - [Supplier Portal](#)
 - [Careers](#)
 - [Terms & Conditions](#)
 - [Privacy Policy](#)
 - [AODA Accessibility Policy](#)

- Quick Links**
- [Distributor Inventory](#)
 - [Product Cross Reference](#)
 - [Documents & Drawings](#)
 - [Product Compliance Support Center](#)
 - [Site Map](#)

- Customer Support**
- [Email or Chat With Us](#)
 - [Find a Phone Number](#)
 - [Knowledge Base](#)
 - [Manage Your Account](#)

Keep Me Informed

