




# MARKETING SALES DRAWING

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**

**DIMENSIONS IN METRIC - [ ]**

This drawing is the property of  
Tusonix, Inc., and may not be  
used, reproduced, published or  
disclosed to others without ex-  
pressed authorization by Tusonix Inc.

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

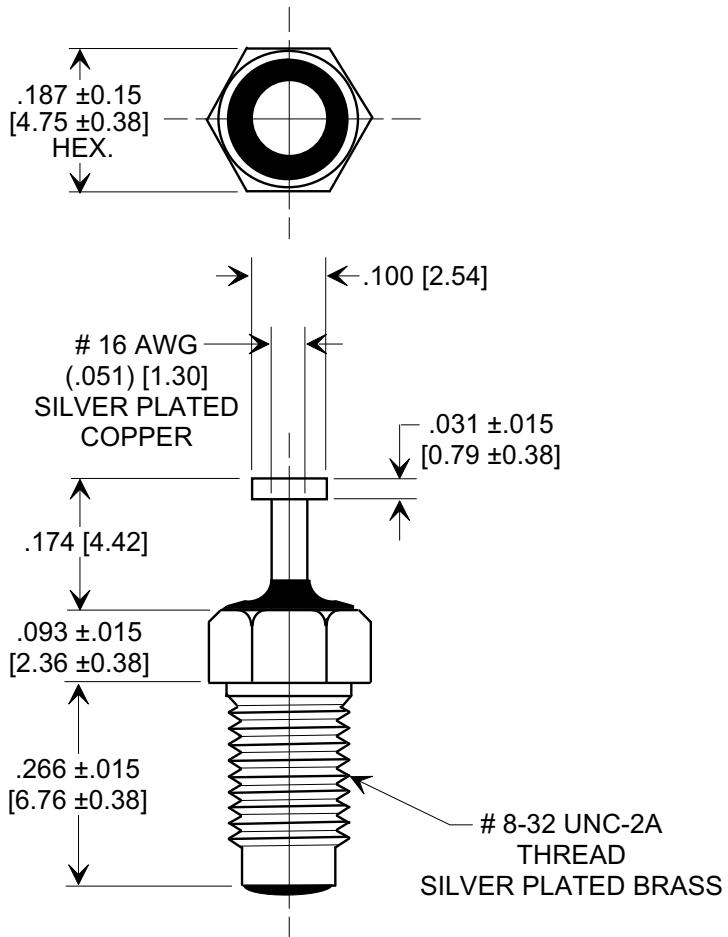

## SPECIFICATIONS

TUSONIX STYLE:	2425-061
CAP. VALUE:	1,000 pF
CAP. TOLERANCE:	GMV
TEMP. CHARACTERISTIC:	X5U
RATING:	200 VDC @ + 85°C/100 VDC @ +125°C
OPERATING RANGE:	-55°C TO 125°C
IR MIN. @ 100 VDC:	10 G Ω
DWV VDC:	600

### NOTES:

1. MOUNTING TORQUE NOT TO EXCEED 2.5 lb-in. [.282 Nm].
2. TUSONIX STANDARD PART NUMBER: 2425-061-X5U0-102AA. TUSONIX RoHS COMPLIANT PART NUMBER: 2425-061-X5U0-102AA LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
3. PART MARKING: STANDARD PART: BLACK INK FOR TRADEMARK AND CAP. CODE. RoHS PART: GREEN INK FOR TRADEMARK AND CAP. CODE.

REVISION RECORD	A		--TOLERANCES-- Unless Otherwise Specified	Title	MINIATURE BUSHING STANDOFF
			DECIMAL ± .031 [0.79]	Drawn S.M. 01-26-09	Approved R.L. 01-26-09
Original Release C.O. ECO-497			<b>TUSONIX</b> TUCSON, ARIZONA	A   2425-061-X5U0-102AA	