

VLT80 Series

80W single and quad output AC/DC Power Supplies

An industry favorite at 80-watts with no fan! Power solutions for 1U height and smaller applications are made easy with the single and quad output versions of the venerable 5.0"x3.040x1.073" EOS VLT80 from Red Rocket, Inc.

All popular DC voltages are offered from 3.3v to 48v with full universal 90v to 264v input and power conversion ratings > 85%. Class A harmonic current correction is featured as is a full 80 watts power with convection cooling. Ideal for data networking, industrial and multimedia applications. The VLT80 family is RoHs compliant and our factory is ISO 14001 environmentally approved. Worldwide safety standards apply and the power supply is fitted with OVP and OCP standard features.



Features :

- > 80 W convection cooled rating.
- > Small 5.0x3.04x1.073 inch form factor.
- > High efficiency > 85%.
- > Class A harmonic current correction.
- > EN55022-B, FCC Part 15 Level B.
- > Cover Kit accessory available.

Model Number	Output	Nom Vout	Set Point	Output Current	Min. Load
VLT80-1000 ²	V1	5V	5.1V	12.0A	1.0A
VLT80-1001 ²	V1	12V	12V	6.8A	0.4A
VLT80-1002 ²	V1	15V	15V	5.5A	0.4A
VLT80-1003 ²	V1	24V	24V	3.4A	0.2A
VLT80-1008 ²	V1	36V	36V	2.2A	0.2A
VLT80-1004 ²	V1	48V	48V	1.7A	0.2A
VLT80-4000	V1	5V	5.1V	10.0A	1.0A
	V2	12V	12.4V	3.0A	0.1A
	V3	-5V	-5.1V	0.8A	0.0A
	V4	-12V	-12.5V	0.8A	0.0A
VLT80-4001	V1	5V	5.1V	10.0A	1.0A
	V2	24V	23.5V	2.0A	0.1A
	V3	12V	12.5V	0.8A	0.0A
	V4	-12V	-12.5V	0.8A	0.0A
VLT80-4002	V1	5V	5.1V	10.0A	1.0A
	V2	15V	16V	3.0A	0.1A
	V3	-5V	-5.1V	0.8A	0.0A
	V4	-15V	-16V	0.8A	0.0A
VLT80-4003	V1	5.0V	5.1V	10.0A	1.0A
	V2	12V	12.4V	3.0A	0.1A
	V3	24V	24V	0.8A	0.0A
	V4	-12V	-12.5V	0.8A	0.0A
VLT80-4004	V1	3.3V	3.3V	10.0A	1.0A
	V2	5V	5.1V	3.0A	0.1A
	V3	12V	12.5V	0.8A	0.0A
	V4	-12V	-12.5V	0.8A	0.0A
VLT80CK Metal cover kit accessory					

INPUT SPECIFICATION		
AC Input	Universal	90 to 264Vac
Efficiency	All Models VLT80-4004	85% Typical 80%
Input Frequency		47-63 Hz
Input Current	Full Load at low line	2.2Arms , max
Inrush Current	High Line , cold start	35A,max

OUTPUT SPECIFICATION		
Output Power	Convection cool	80W max
Voltage Set Point		See table
Hold-Up Time	115V	10ms
Voltage Set Point Accuracy	V1 V2,V3,V4	±3% ±5%
Line Regulation	Low line to high line	±0.3%
Load Regulation	Min to 50% & 50% to Max load V1 V2,V3,V4	±1% ±5%
Transient Response	50% to full load Voltage Deviation Recovery Time	10%, max <1 ms
OVP	V1 only %V 3.3V	6.4V, +0.4V 4.1±0.2V
Overload Protection	Primary limited	88W-128W
Short Circuit Protection	Auto recovery <6s	Short Term
Ripple and Noise	3.3V & 5V Other voltages	50mV 1%
Power Fail Signal ²	TTL	1ms Min. warning
Power Good Signal ²	Delay after V1 high	100ms, min
Output Rise Time		<40ms

1) Maximum current per output channel. Do not exceed total output power rating.
2) Power fail & Power good signal on quad output models only.




VLT80 Series

80W single and quad output AC/DC Power Supplies



EMC AND SAFETY SPECIFICATIONS		ENVIRONMENTAL SPECIFICATION		
CE Mark	Complies with the LVD	Operating Temperature	No derating Linear derate to 50%	0 to 50° C 51 to 70° C
EMC	EN5022-B,CISPR22-B, FCC Part 15 Class B, EN50082-1	Storage Temperature		-40 to 70° C
Agency Approval	VDE , UL, c-UL,NEMKO	Cooling	Convection	80W
Safety Standard	IEC60950,EN60950,UL60950, CSA ,C22.2 No. 60950 Class 1 SELV	Relative humidity	Non condensing	95%, max
Safety File Number	VDE: 104751 UL: E150565 NEMKO: 129397	MTBF	MIL - HDBK-217F	> 200,000 hrs

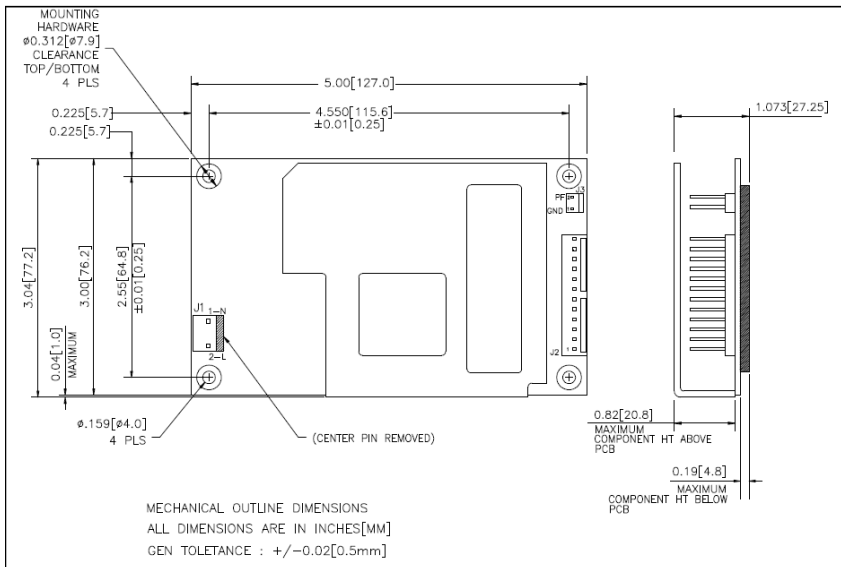

OUTPUT CONNECTOR J2		
	Single Output	Quad Output
Pin 1,2,3,4	V1	V1
Pin 5,6,7,8	DC Return	DC Return
Pin 9,10	NC	V2
Pin 11	NC	V3
Pin 12	NC	V4

MECHANICAL SPECIFICATION	
AC Input Connector J1	Molex 3 position, 0.156 center Header 26-60-4030 or equivalent
Ground Connector	Spade connector. 0.25"
DC Output connector J2	Molex12 position, 0.156 center Header 26-60-4120 or equivalent
Output connector J3	Molex 2 position, 0.100 center Header 22-23-2021 or equivalent
Size	5.0x3.04x1.073"
Weight	9oz (250g)

INPUT SPADE CONNECTOR	
GND	AC Ground

INPUT CONNECTOR J1	
Pin 1	AC Neutral
Pin 2	AC Line

INPUT CONNECTOR J3	
Pin 1	Common
Pin 2	Power Fail/Good

All EOS power supplies have UL, CSA and Nemko safety compliance and medical versions meet UL60601-1 standards. All our products are RoHs compliant. Visit us at www.eospower.com. EOS brand power supplies and patents are owned exclusively by EOS Power. All Rights Reserved.

