REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE



RECOMMENDED
CABLE STRIPPING DIM'S

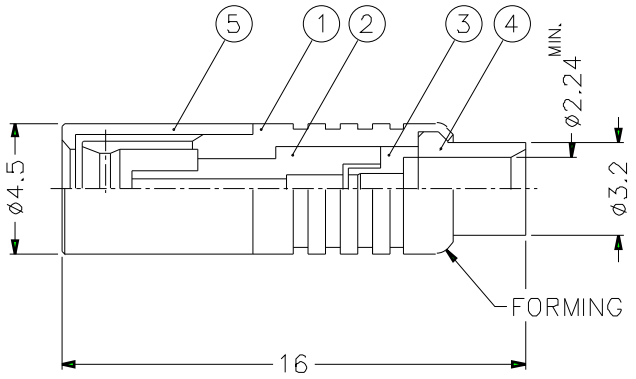

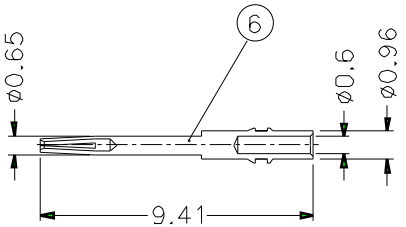

NOTES FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530

1. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	CONTACT PIN	NOTE 5	NOTE 3	1	SSMB6121A1-6-096/06
5	SHELL	NOTE 1	NOTE 2	1	SSMB-SHEEL-1
4	BARREL	NOTE 1	NOTE 2	1	SSMB1481A1-4-32/224
3	INSULATOR	NOTE 4	NATURAL	1	SSMB1481A1-3T-50
2	INSULATOR	NOTE 4	NATURAL	1	SSMB6121A1-2T-50
1	BODY	NOTE 5	NOTE 2	1	SSMB6121A1-1

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 4/1 ISSUE A

PART NO. SSMB6181A1-3GT30G-11-50

APPROVED	DATE 10-11-01'
CHECKED	DATE 10-11-01'
DRAWN	DATE 10-11-01'
FILE NO.	

Amphenol

TITLE SSMB DIRECT SOLDER PLUG (FOR .085", .086")

DRAWING NO. KJ-SSMB6181A1-3GT30G-.085-50

ITEM NO.