

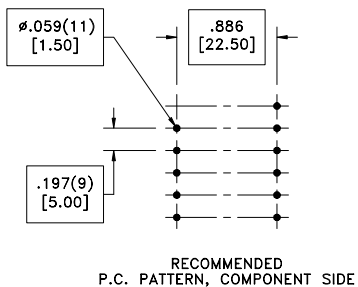


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	No



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-4 @20°C	1.1 ohms max.
D.C. RESISTANCE	2-3 @20°C	1.3 ohms max.
D.C. RESISTANCE	5-6 @20°C	0.02 ohms max.
D.C. RESISTANCE	11-12 @20°C	0.025 ohms max.
D.C. RESISTANCE	9-10 @20°C	0.025 ohms max.
D.C. RESISTANCE	7-8 @20°C	0.045 ohms max.
INDUCTANCE	3-4 100kHz, 1.0VAC, Ls	1.25mH ±0.11mH
INDUCTANCE	2-3 100kHz, 1.0VAC, Ls	1.25mH ±0.11mH
INDUCTANCE	5-6 100kHz, 1.0VAC, Ls	12.5uH ±1uH
INDUCTANCE	11-12 100kHz, 1.0VAC, Ls	12.5uH ±1uH
INDUCTANCE	9-10 100kHz, 1.0VAC, Ls	12.5uH ±1uH
INDUCTANCE	7-8 100kHz, 1.0VAC, Ls	50uH ±4uH
LEAKAGE INDUCTANCE	2-4 tie(7+8+9+10+11+12), 100kHz, 100mVAC, Ls	50uH max.
DIELECTRIC	PRI-SEC 4800VAC for 1 second	4000VAC 1 minute
URNS RATIO	(3-4):(2-3)	1:1, ±1%
URNS RATIO	(3-4):(11-12)	10:1, ±1%
URNS RATIO	(3-4):(7-8)	5:1, ±1%
URNS RATIO	(3-4):(5-6)	10:1, ±1%
URNS RATIO	(3-4):(9-10)	10:1, ±1%

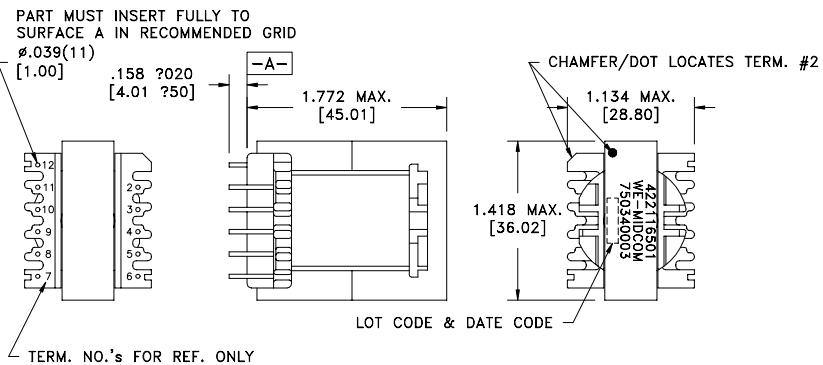

REV.	DATE
6B	5/07
6A	4/07

Packaging Specifications
 Method: Tray
 PKG-0632
 www.midcom-inc.com

Unless otherwise specified:
 Tolerances: Fractions: ±1/64
 Angles: ±1° Decimals: ±.005[.127]
 This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER
 eiSos p/n: 750340003

REVISIONS: SEE SHEET 1

DRAWING NO.
750340003
 SCALE --- SHEET 2 OF 5