



Types 271-272-273 Typical Ratings

Type 271

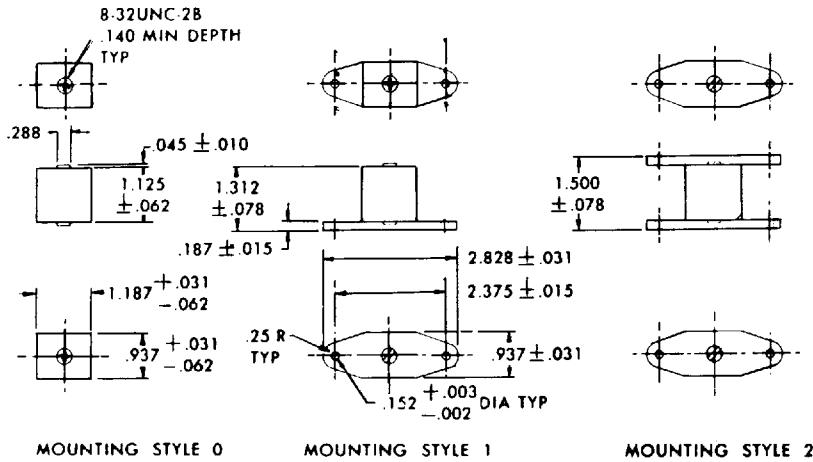


Type 273

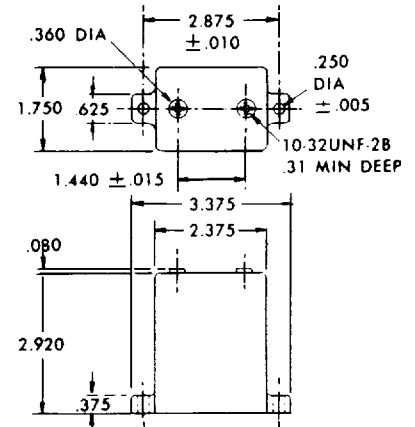

TOLERANCES UNLESS OTHERWISE SPECIFIED: ± .031

Type 272

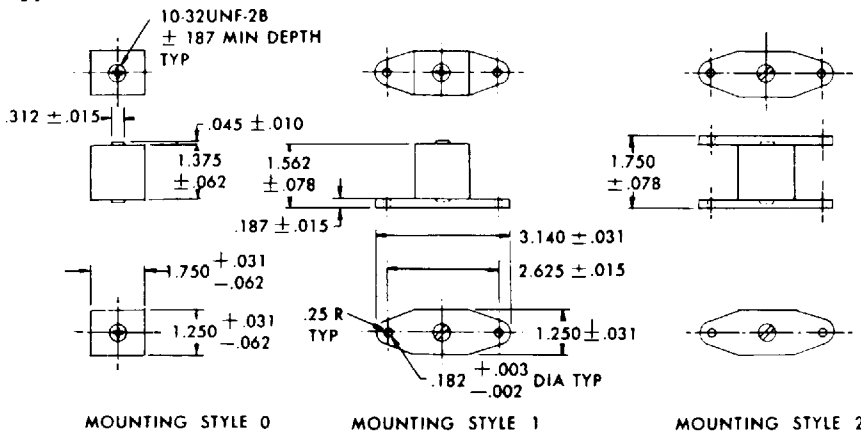

Type 271

Type 272

Type 273

CAPACITANCE (pF)	RATED PEAK VOLTAGE	CATALOG NUMBER	RATED CURRENT AT FREQUENCIES (rms amps)				RATED PEAK VOLTAGE	CATALOG NUMBER	RATED CURRENT AT FREQUENCIES (rms amps)				RATED PEAK VOLTAGE	CATALOG NUMBER	RATED CURRENT AT FREQUENCIES (rms amps)				CAPACITANCE (pF)
			3 MHz	1 MHz	3 MHz	1 MHz			3 MHz	1 MHz	3 MHz	1 MHz			3 MHz	1 MHz	3 MHz	1 MHz	
47	3000	27130B470J0-	1.2	.51	.15	.051	5000	27250B470J0-	1.5	.62	.20	.062	47
51	3000	27130B510J0-	1.3	.51	.18	.056	5000	27250B510J0-	1.6	.68	.22	.062	51
56	3000	27130B560J0-	1.3	.56	.20	.056	5000	27250B560J0-	1.8	.75	.27	.068	56
62	3000	27130B620J0-	1.5	.62	.22	.068	5000	27250B620J0-	1.8	.82	.30	.075	62
68	3000	27130B680J0-	1.5	.62	.24	.075	5000	27250B680J0-	2.0	.91	.33	.075	68
75	3000	27130B750J0-	1.5	.62	.27	.082	5000	27250B750J0-	2.0	1.0	.36	.082	75
82	3000	27130B820J0-	1.6	.68	.27	.082	5000	27250B820J0-	2.2	1.1	.39	.091	82
91	3000	27130B910J0-	1.6	.68	.33	.091	5000	27250B910J0-	2.4	1.2	.43	.10	91
100	3000	27130B101J0-	1.8	.75	.33	.10	5000	27250B101J0-	2.4	1.2	.47	.10	100
110	3000	27130B111J0-	1.8	.82	.36	.12	5000	27250B111J0-	2.7	1.3	.51	.15	110
120	3000	27130B121J0-	2.0	.91	.39	.15	5000	27250B121J0-	2.7	1.5	.56	.18	120
130	3000	27130B131J0-	2.0	.91	.43	.16	5000	27250B131J0-	3.0	1.6	.62	.22	130
150	3000	27130B151J0-	2.2	1.0	.47	.18	5000	27250B151J0-	3.3	1.8	.68	.24	150
160	3000	27130B161J0-	2.2	1.1	.51	.20	5000	27250B161J0-	3.3	1.8	.75	.27	160
180	3000	27130B181J0-	2.4	1.1	.56	.22	5000	27250B181J0-	3.3	2.0	.82	.30	180
200	3000	27130B201J0-	2.4	1.2	.62	.24	5000	27250B201J0-	3.6	2.0	.82	.33	8000	27380B201J0-	7.5	5.0	1.5	0.5	200
220	3000	27130B221J0-	2.7	1.3	.62	.27	5000	27250B221J0-	3.6	2.2	.91	.39	220
240	3000	27130B241J0-	2.7	1.3	.68	.30	5000	27250B241J0-	3.6	2.4	1.0	.43	240
250	3000	27130B251J0-	2.7	1.3	.68	.30	5000	27250B251J0-	3.6	2.4	1.0	.43	8000	27380B251J0-	7.5	5.0	1.5	0.5	250
270	3000	27130B271J0-	3.0	1.5	.75	.30	5000	27250B271J0-	3.9	2.4	1.1	.47	270
300	3000	27130B301J0-	3.0	1.5	.75	.36	5000	27250B301J0-	3.9	2.7	1.1	.51	300
330	3000	27130B331J0-	3.0	1.6	.82	.36	5000	27250B331J0-	4.3	2.7	1.2	.51	330
360	3000	27130B361J0-	3.3	1.6	.91	.39	5000	27250B361J0-	4.3	2.7	1.3	.56	360
390	3000	27130B391J0-	3.3	1.8	.91	.43	5000	27250B391J0-	4.3	2.7	1.3	.62	390
430	3000	27130B431J0-	3.6	1.8	1.0	.47	5000	27250B431J0-	4.7	3.0	1.5	.68	430

