


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

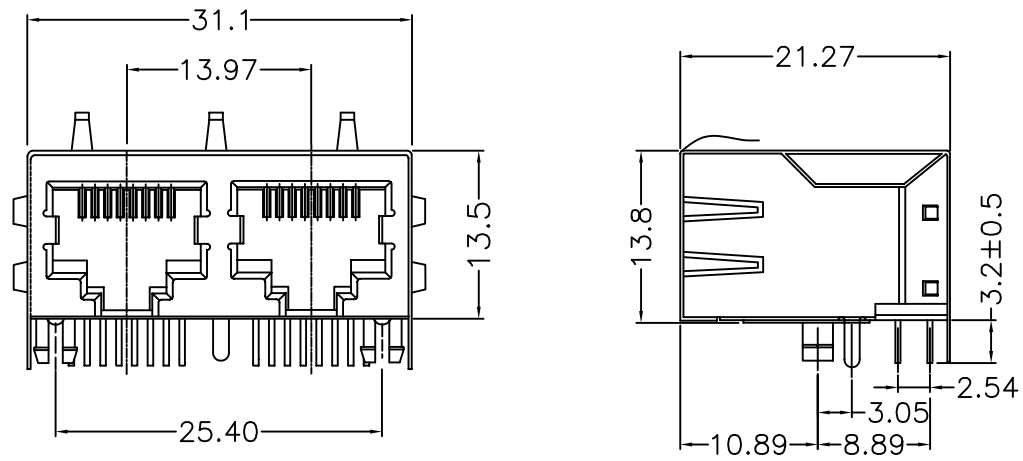

SPECIFICATIONS



MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold
4. Shield : 0.25mm Thickness Copper Alloy With Tin/Nickel Plated

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 50 Milliohms MAX
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

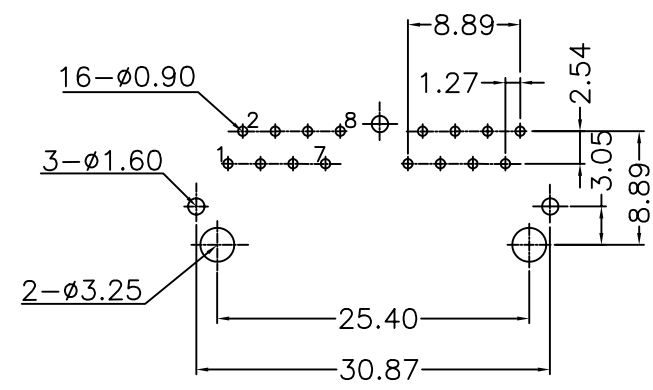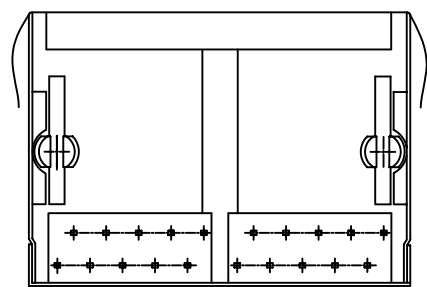

PCB LAYOUT/TOP VIEW



煜倫有限公司

PART NO. MJF13A2-KF03B3-0808

DWG NO. MJF13A2-KF03B3-0808

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.3
.XX ± 0.2
.XXX ±
AWG

DESCRIP TION:		Side Entry Shielded Gang Jack(2 Port)			
AREA	REVISIONS	HK	DATE		