
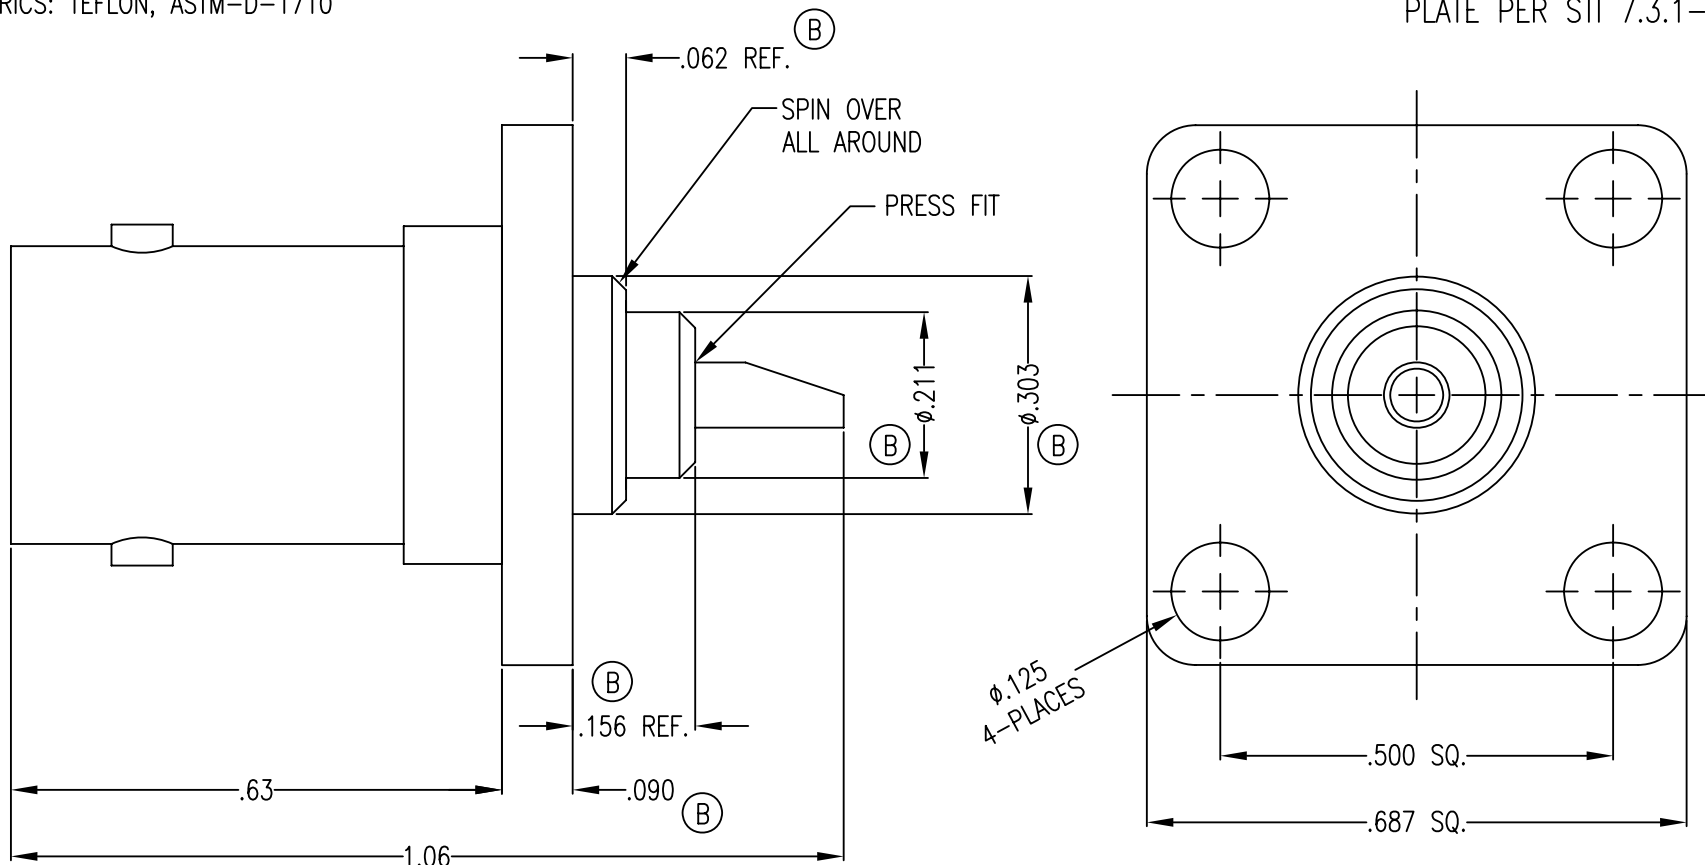


1.0 PERFORMANCE
 1.1 FREQUENCY RANGE: DC-4GHz
 1.2 VOLTAGE RATING: 500V RMS (sea level)
 1.3 NOMINAL IMPEDANCE: 50 OHMS
 1.4 DWV: 1500 V RMS @ 60 Hz (sea level)
 1.5 TEMPERATURE RANGE: -65° C TO +165° C
 2.0 MATERIALS
 2.1 DIELECTRICS: TEFLON, ASTM-D-1710

2.2 CONTACTS: BERYLLIUM COPPER, ASTM-B-196
 2.3 OTHER METAL PARTS: BRASS, ASTM-B-16
 3.0 FINISHES: SEE TABLE
 4.0 MECHANICAL
 4.1 INTERFACE IN ACCORDANCE WITH MIL-STD-348

DWG NO. OL-0106-14-1		REV. C
PART NUMBER	BODY	CONTACT
0106-14	NICKEL	SILVER
0106-14-AG	ALBALOY	GOLD/Cu
0106-14-SG	SILVER	GOLD/Cu
PLATE PER STI 7.3.1-8		



					PROPRIETARY THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN*TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN*TRON INCORPORATED.				 SAN • TRON, INC. 4 NEWBURYPORT TPK, IPSWICH, MA 01938	
C	ADD PLATING TABLE	1/18/10	FSH	FSH	REMOVE ALL BURRS AND SHARP EDGES .005 MAX. UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING				TITLE SPECIAL BNC RECEPTACLE	
B	ADDED: DIMENSIONS	8/1/02	JMB						MATERIAL: SEE NOTE 2.0	
A	ORIGINAL	7/17/97							FINISH: SEE NOTE 3.0	
Rev.	Revisions	Date	Dwn.	Appd.	UNSPECIFIED TOL.	DWN	KC	4/17/97	FSCM NO. 50896	
					.XX ± .015	CHKD	SJS	4/17/97	DWG NO. OL-0106-14-1	
					.XXX ± .010	APPR	JTO	4/18/97	REV. C	
					FRAC. ± 1/64				SCALE 4:1	
RECOM. STOCK SIZE FT/M PCS QTY REQD					CONCENTRICITY .004 TIR ALL MACHINED SURFACES					