



Dielectric Filter

● For Cordless Phone 无绳电话用

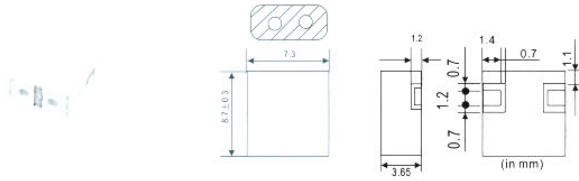


Type 型号	Center Frequency (MHz) 中心频率	Band Width (MHz) 带宽	Insertion Loss (dB) 插入衰减	Ripple (dB) 通带波动	V.S.W.R.(in BW) (dB) 驻波比	Attenuation (dB) 相对衰减
DFC903P02A	903.00	±1.0	≤4.0	≤0.5	≤2.0	≥25(f _o +24MHz) ≥20(f _o -24MHz)
DFC927P02A	927.00	±1.0	≤4.0	≤0.5	≤2.0	≥18(f _o +24MHz) ≥25(f _o -24MHz)
DFC914P01A	914.50	±0.5	≤3.0	≤0.5	≤2.0	≥30(f _o +44MHz) ≥24(f _o -44MHz)
DFC959P01A	959.50	±0.5	≤3.0	≤0.5	≤2.0	≥24(f _o +44MHz) ≥30(f _o -44MHz)

● For Mobile Communication 移动通信用

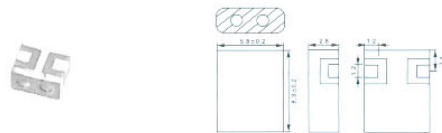

Type 型号	Center Frequency (MHz) 中心频率	Band Width (MHz) 带宽	Insertion Loss (dB) 插入衰减	Ripple (dB) 通带波动	V.S.W.R.(in BW) (dB) 驻波比	Attenuation (dB) 相对衰减
DFC903C02A	903.00	±1.0	≤4.0	≤0.5	≤2.0	≥35(f _o +24MHz)
DFC915P26A	915.00	±13.0	≤2.5	≤0.5	≤2.0	≥17(f _o +77.5MHz) ≥27(f _o -77.5MHz)
DFC927C02A	927.00	±1.0	≤4.0	≤0.5	≤2.0	≥18(f _o +24MHz) ≥25(f _o -24MHz)

● For Cordless Phone 无绳电话用

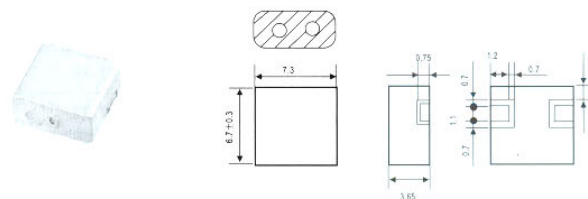

Type 型号	Center Frequency (MHz) 中心频率	Band Width (MHz) 带宽	Insertion Loss (dB) 插入衰减	Ripple (dB) 通带波动	V.S.W.R.(in BW) (dB) 驻波比	Attenuation (dB) 相对衰减
DFC2403P06A	2403.30	±3.0	≤3.5	≤0.5	≤2.0	≥32(in 2475MHz)
DFC2475C06A	2475.30	±3.0	≤3.5	≤0.5	≤2.0	≥33(in 2403MHz)


Contacts:

TELCONA AG,Head Office: Höri, Switzerland
TELCONA AG,Sales Office: Sinsheim, Germany
TELCONA AG,Sales Office: Lésigny, France

Tel.++41-1-860 2550
Tel.++49-7261-655 388
Tel.++33-1-60 34 28 28


Fax.++41-1-860 2822 www.telcona.com
Fax.++49-7261-655 389
Fax ++33-1-60 34 28 29

● For Mobile Telecom 移动通信用

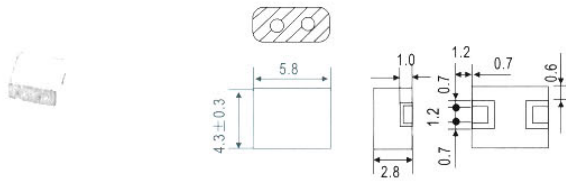


Type 型号	Center Frequency (MHz) 中心频率	Band Width (MHz) 带宽	Insertion Loss (dB) 插入损耗	Ripple (dB) 通带波动	V.S.W.R.(in BW) (dB) 驻波比	Attenuation (dB) 相对衰减
DFC1890P20A	1890	±10.0	≤3.0	≤0.5	≤2.0	≥19(fo+100MHz) ≥25(fo-100MHz)
DFC1890C20A	1890	±10.0	≤2.0	≤0.5	≤2.0	≥37(in 1660MHz) ≥37(in 1680MHz)
DFC1910P20A	1910	±10.0	≤2.0	≤0.5	≤2.0	≥37(in 1680MHz) ≥37(in 1700MHz)

● For GPS GPS 用

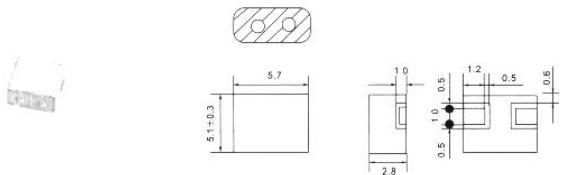

Type 型号	Center Frequency (MHz) 中心频率fo	Band Width (MHz) 带宽	Insertion Loss (dB) 插入损耗	Ripple (dB) 通带波动	V.S.W.R.(in BW) (dB) 驻波比	Attenuation (dB) 相对衰减
DFC1575P10A	1575.42	±5.0	≤3.0	≤0.5	≤2.0	≥25(fo+100MHz) ≥40(fo-100MHz)
DFC1575D02A	1575.42	±1.0	≤3.5	≤0.5	≤2.0	≥18(fo+50MHz) ≥25(fo-50MHz)

● Dielectric Antenna Elements for GPS GPS 用介质天线元件

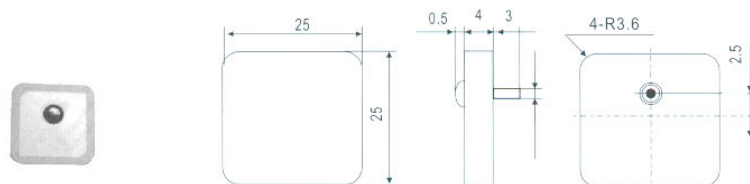

Type 型号	Center Frequency (MHz) 中心频率	Band Width (MHz) 带宽	V.S.W.R.(in BW) (dB) 驻波比	Gain(90°typ.) 增益 (dBi)	Gain(10°typ.) 增益 (dBi)	Impedance 特性阻抗(Ω)
DAS1575R7A	1575.42	≥±5.0	≤2.0	+5.0 min.	-1.0 min.	50

Contacts:

TELCONA AG,Head Office: Höri, Switzerland
TELCONA AG,Sales Office: Sinsheim, Germany
TELCONA AG,Sales Office: Lésigny, France

Tel.++41-1-860 2550
Tel.++49-7261-655 388
Tel.++33-1-60 34 28 28

Fax.++41-1-860 2822 www.telcona.com
Fax.++49-7261-655 389
Fax ++33-1-60 34 28 29