

Adjustable Type Coils M Type Series

Coils, Filters

M5-S2






Specifications

- (1) 0.03~3 μ H
- (2) 10~200MHz
- (3) F: $\pm$ 1.5%
L: $\pm$ 3%
- (4) -
- (5) 40~70

Features

- SMD
- 2000pcs./Reel



M5-N1






Specifications

- (1) 0.03~40 μ H
- (2) 3~200MHz
- (3) F: $\pm$ 2%
L: $\pm$ 4%
- (4) -
- (5) 30~80

Features

- SMD
- 1000pcs./Reel



M5-N






Specifications

- (1) 0.03~130 μ H
- (2) 3~200MHz
- (3) F: $\pm$ 2%
L: $\pm$ 4%
- (4) -
- (5) 30~80

Features

- SMD
- 1000pcs./Reel






M5-H1



Specifications

- (1) 0.03~130 μ H
- (2) 10~200MHz
- (3) F: $\pm$ 2%
L: $\pm$ 4%
- (4) -
- (5) 30~80




- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q

M5-D2




Specifications

- (1) 0.03~10 μ H
- (2) 10~200MHz
- (3) F: $\pm 2\%$
L: $\pm 4\%$
- (4) —
- (5) 30~80

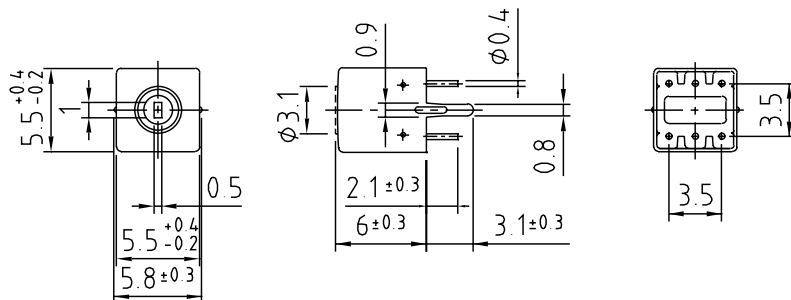


M5-F1

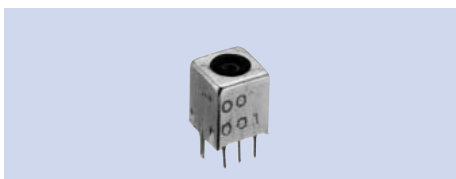

Specifications

- (1) 0.03~18 μ H
- (2) 10~200MHz
- (3) F: $\pm 2\%$
L: $\pm 4\%$
- (4) 10~82pF
- (5) 30~80

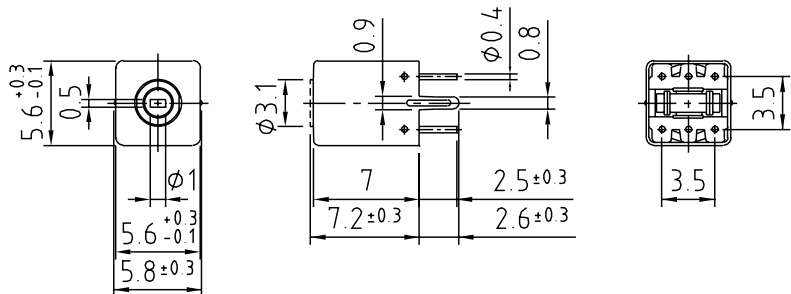


M7-C




Specifications

- (1) 0.1~40 μ H
- (2) 10~120MHz
- (3) F: $\pm 2\%$
L: $\pm 5\%$
- (4) —
- (5) 70~110

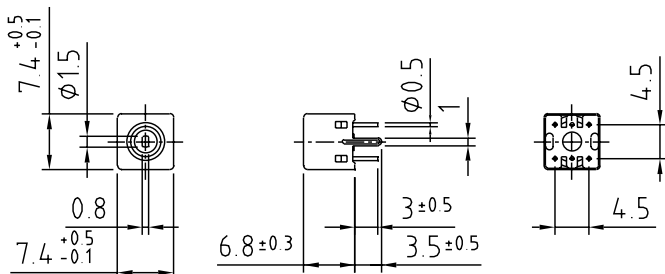


M7-B

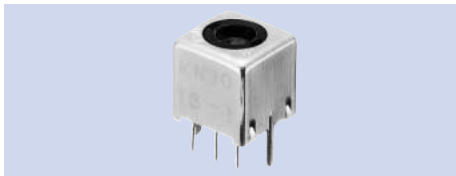


Specifications

- (1) 0.1~80 μ H
- (2) 10~120MHz
- (3) F: $\pm 2\%$
L: $\pm 4\%$
- (4) 10~120pF
- (5) 40~100

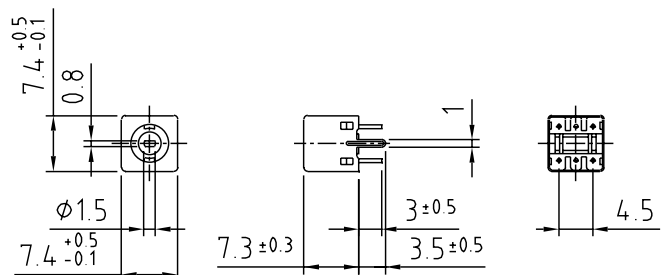

- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q

M7-F1

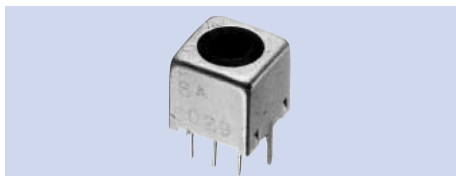


Specifications

- (1) 0.1~95 μ H
- (2) 10~200MHz
- (3) F: $\pm$ 2%
L: $\pm$ 4%
- (4) 10~200pF
- (5) 30~100

Features

FM-detector with
Phase discriminator.

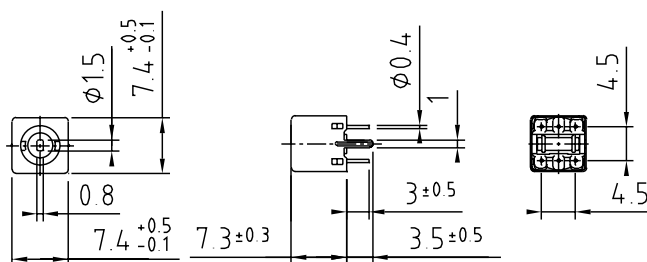

M7-A




Specifications

- (1) 0.1~40 μ H
- (2) 10~200MHz
- (3) F: $\pm$ 2%
L: $\pm$ 5%
- (4) -
- (5) 40~100

Features

Can be soldered
by a reflow
furnace.

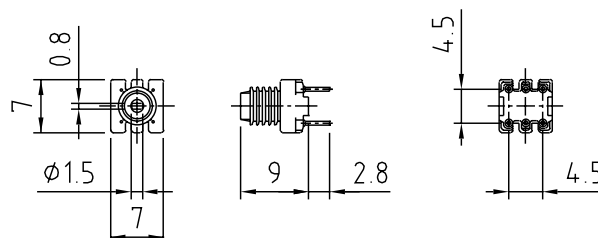


M7-T1



Specifications

- (1) 0.1~40 μ H
- (2) 10~200MHz
- (3) F: $\pm$ 2%
L: $\pm$ 5%
- (4) 10~120pF
- (5) 40~100

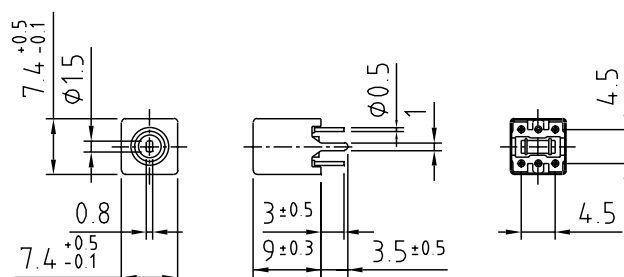

M7-F




Specifications

- (1) 0.1 μ ~95 μ H
- (2) 10~200MHz
- (3) F: $\pm$ 2%
L: $\pm$ 4%
- (4) 10~120pF
- (5) 30~100

Features

FM-detector with
Phase discriminator.

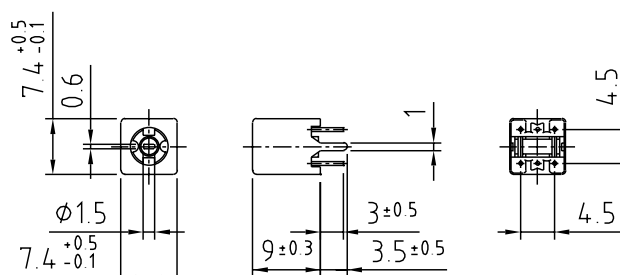


- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q

M7-D3



Specifications

- (1) 0.1~40 μ H
- (2) 10~200MHz
- (3) F: $\pm$ 3%
L: $\pm$ 6%
- (4) —
- (5) 40~100

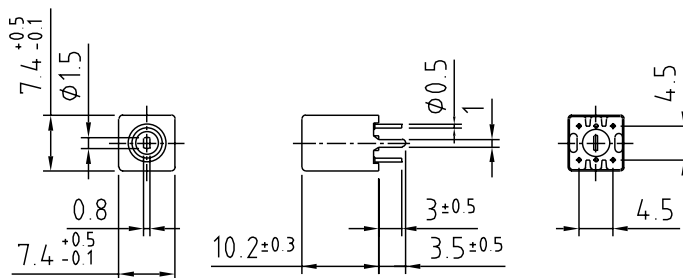


M7-M



Specifications

- (1) 0.1~150 μ H
- (2) 1~200MHz
- (3) F: $\pm$ 3%
L: $\pm$ 6%
- (4) 10~120pF
- (5) 40~100

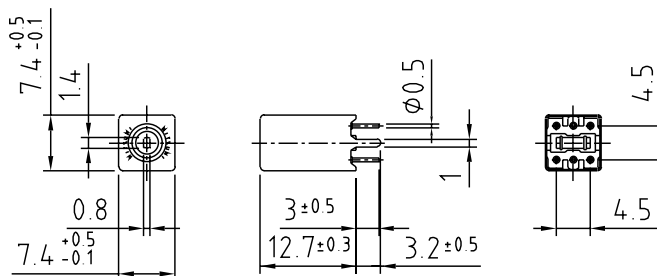

- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q