




REV	DESCRIPTION	BY DATE	APPD
02	EW07-2622	PSM 03/12/07	DCam

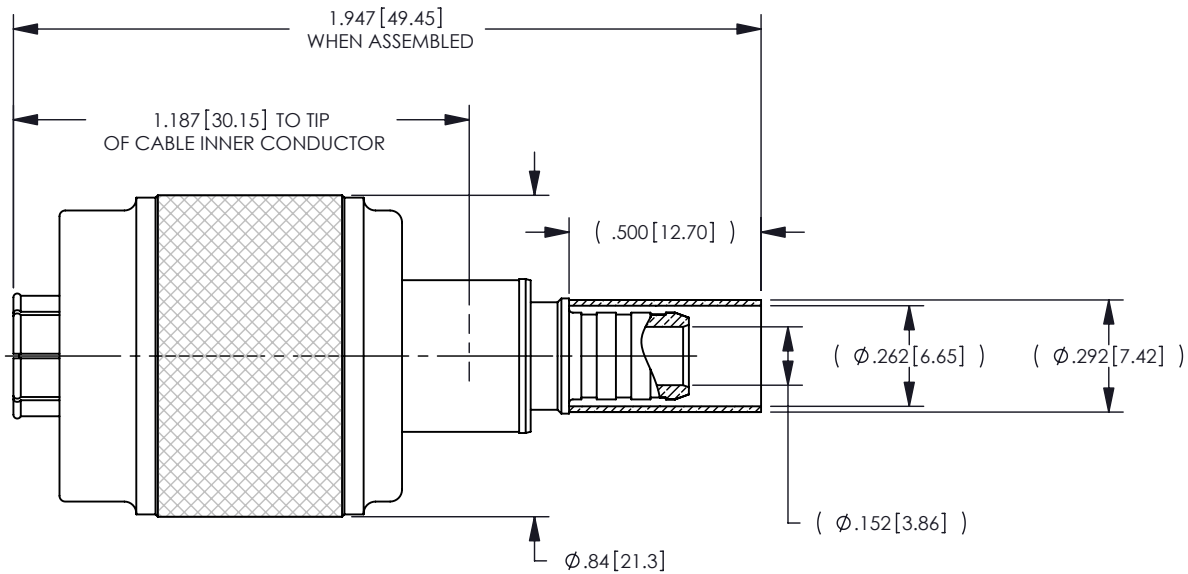

ISOMETRIC VIEW
SCALE: 1:1

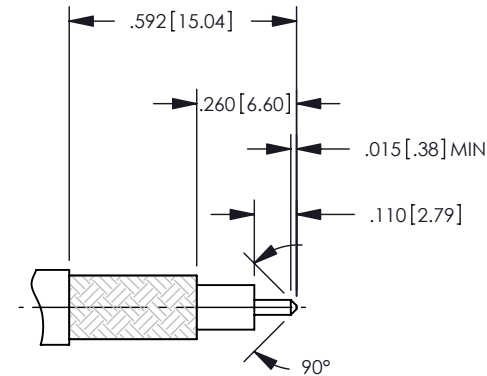

CABLE TRIM DIMENSIONS

CATALOG P/N: 120-900-2401R

NOTES: UNLESS OTHERWISE SPECIFIED

- FOR GENERAL SERIES SPECIFICATIONS, SEE SD12-0000.
- MATERIAL SPECIFICATIONS:
SLEEVE: BRASS PER ASTM B16.
CENTER CONTACT, BODY, OUTER CONTACT, AND FERRULE: COPPER ALLOY
INSULATOR: TEFLON PER ASTM D1710
O-RING: SILICON RUBBER PER ZZ-R-765
- FINISH SPECIFICATIONS:
CENTER CONTACT: GOLD PER ASTM B4888
ALL OTHER METAL PARTS: TRI-PLATE
- FERRULE SHIPPED LOOSE.
- DESIGNED FOR USE WITH KING SIGNAL TZC50025 OR EQUIVALENT CABLES.
- CRIMP FERRULE USING .255 HEX DIE.
- MATES WITH STANDARD TYPE N INTERFACE PER MIL-STD-348A, FIG 304.2 (.187±.015 THREAD LENGTH).
- MEETS REQUIREMENTS OF IEC 60529, IP67.
- ELECTRICAL SPECIFICATIONS:
FREQUENCY RANGE: DC TO 11 GHz
VSWR: TBD

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMAL: .XX ± .01 [0.3]
.XXX ± .005 [0.13]
.XXXX ± .XXXX
ANGLES: ± 2° SCALE: 2:1



Winchester Electronics Corporation
62 Barnes Industrial Road North
Wallingford, Connecticut 06492

CUSTOMER
DRAWING



QC-N STRAIGHT PLUG
CRIMP ATTACHMENT

DRAWN	DATE	APPROVED	DATE
PSM	03/12/07	M.AYUB	03/13/07
APPROVED	DATE	APPROVED	DATE
DCam	03/13/07	WPM	03/13/07

A	SD120-900-2401R	SHT 1 OF 1	REV 02
----------	-----------------	------------	--------