

product : DELPHI PN 13553341

**CENTERSTRIPPING
NOT STANDARD HANKE PRESS FOR DRX**

material : CUSN6
surface : SN
material thickness : 1,80 mm


cross-sec. [mm²] : 35,0


strip length [mm] : 10,00 mm

cable type : FL2G
insulation [φmm] : 10,3 – 11,3

seal :

conductor dimension					crimp dimension [mm]				crimping tools		
cable type	cross-section [mm ²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation		core	insulation	anvil
					height ± 0,10	width ± 0,10	height ± 0,20	width ± 0,20			
FL2G	35,0	276 x 0,41	10,8	2300	8,10	11,70	13,40	13,40	UP-C-11.00-9.5-61-42-A DPN 10914834	UP-IS-13.00-13.0-61-39-A (2x) DPN 10914835	<u>two piece anvil</u> LP-C-11.00-10.5-61-A DPN 10805656 LP-I-13.00-13.0-1.4-61 (2x) DPN 10805561

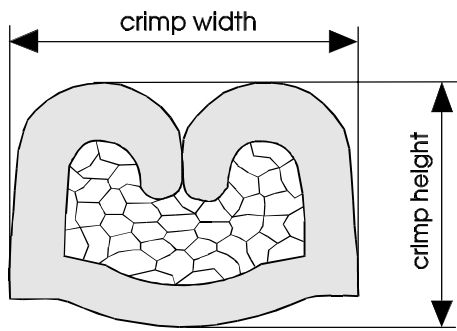

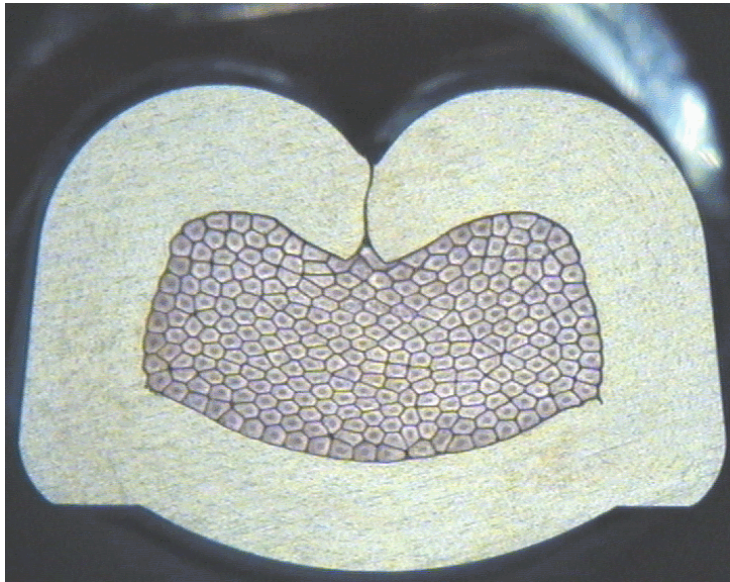

DELPHI PN 13553341

cable:
35,0 mm² = 276 x 0,41 mm

crimping height:
8,10 mm

crimping width:
11,70 mm

tear-out force:
2300 N