


# Product datasheet

Specifications

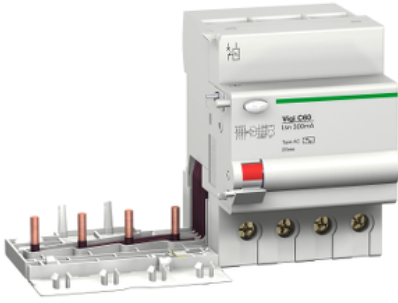

## C60 - earth leakage add-on block - Vigi C60 - 4P - 63A - 30mA

26643

! Discontinued on: 06 August 2018

EAN Code : 3303430266433

! Discontinued

### Main

Product or component type	Add-on residual current devices
Device short name	Vigi C60
Poles description	4P
[In] rated current	63 A
Network type	AC
Earth-leakage sensitivity	30 mA
Earth-leakage protection time delay	Instantaneous
Earth-leakage protection class	Type AC

### Complementary

Device location in system	Outgoer
Network frequency	50/60 Hz
[Ue] rated operational voltage	220...415 V AC 50/60 Hz
Residual current tripping technology	Voltage dependent
[Ui] rated insulation voltage	500 V AC 50/60 Hz conforming to IEC 60947-2
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-2
Mounting support	35 mm symmetrical DIN rail
Electrical connection to mcb	By screws
9 mm pitches	7
Height	87 mm
Width	135 mm
Depth	74 mm
Net weight	0.21 kg
Mechanical durability	20000 cycles
Connections - terminals	Tunnel type terminals 0.5...25 mm <sup>2</sup> flexible Tunnel type terminals 0.5...35 mm <sup>2</sup> rigid
Wire stripping length	14 mm

---

<b>Tightening torque</b>	3.5 N.m
--------------------------	---------

## Environment

---

<b>Standards</b>	IEC 60947-2
<b>Pollution degree</b>	3 conforming to IEC 60947-2
<b>Tropicalisation</b>	2 conforming to IEC 60947-2
<b>Relative humidity</b>	95 % at 55 °C
<b>Operating altitude</b>	2000 m
<b>Ambient air temperature for operation</b>	-5...60 °C
<b>Ambient air temperature for storage</b>	-40...70 °C

## Packing Units

---

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	8 cm
<b>Package 1 Width</b>	9.2 cm
<b>Package 1 Length</b>	14.9 cm
<b>Package 1 Weight</b>	0.293 kg

## Contractual warranty

---

<b>Warranty</b>	18 months
-----------------	-----------

## Recommended replacement(s)