

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,19 .

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD

F

REDRAWN PER EC 0720-0432-94

07NOV94

LO

ME

AMP
WIRE RANGE


E13288

LR7189
Certified

SOLID OR STRANDED


SOLID OR STRANDED

SOLID OR STRANDED

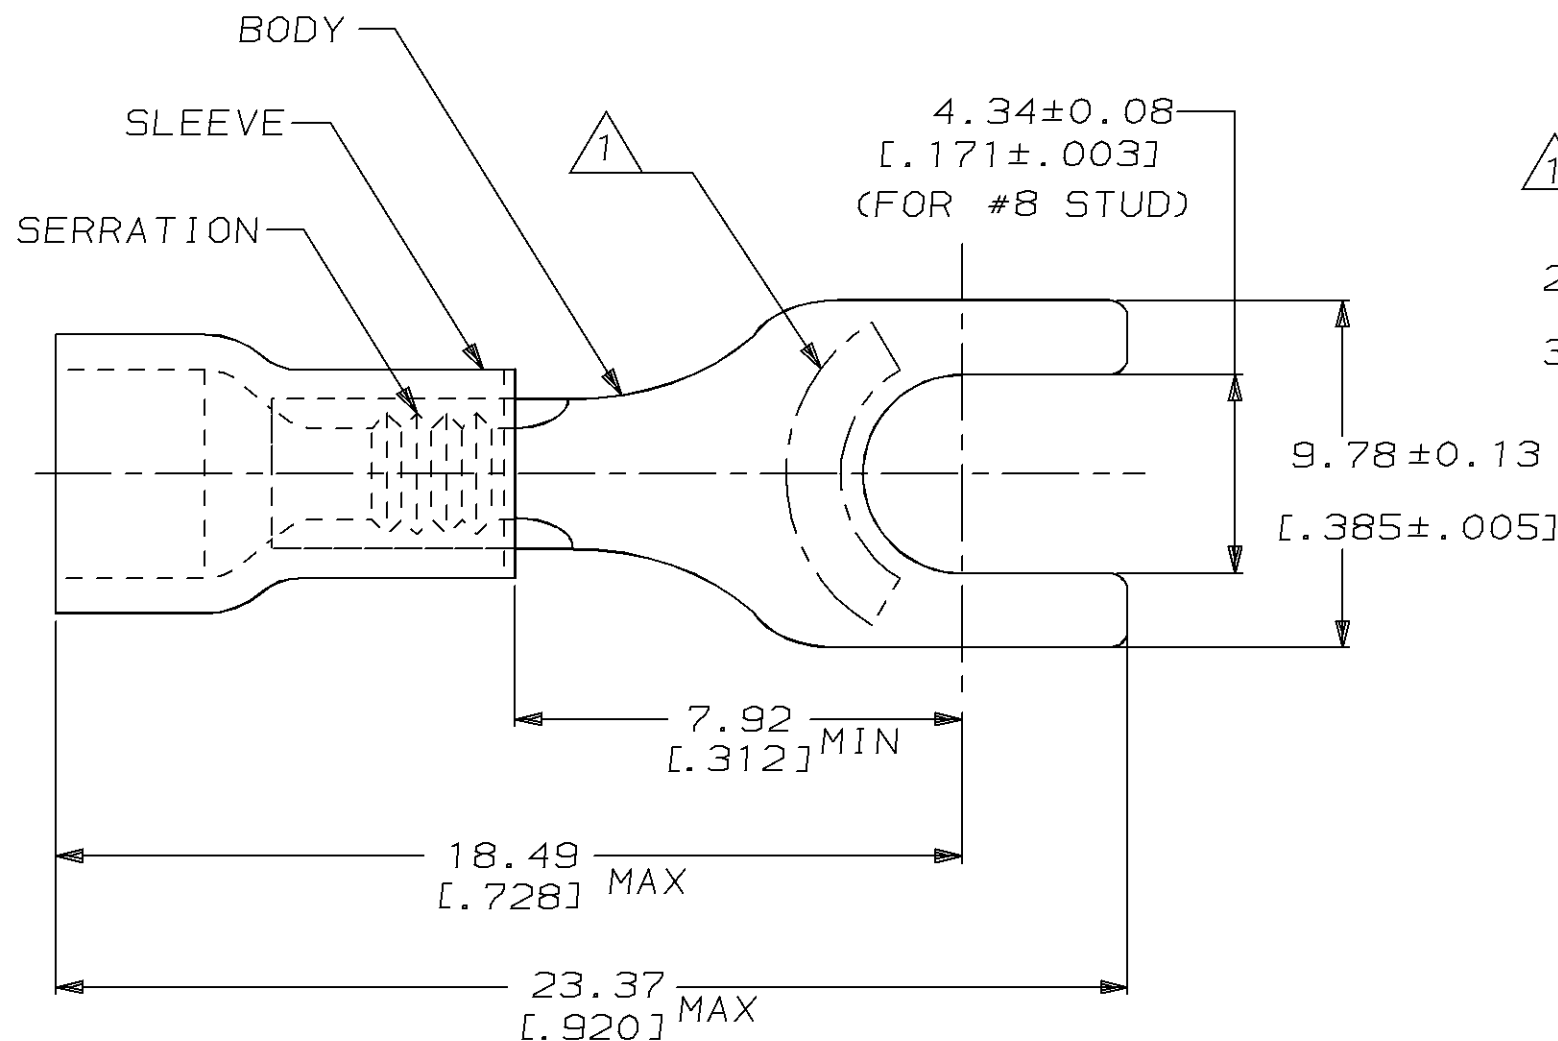

- 1 STAMP AMP 16-14* LOCATE APPROX AS SHOWN
2. WIRE INSUL DIA, 2.92 TO 4.32 [0.115 TO 0.170]
3. TONGUE MATL THK, 0.79 ± 0.05 [0.031 ± 0.002]

5	LOOSE PIECE, BLS	8-34166-4
100	LOOSE PIECE, BOX	8-34166-1
5000	ON TAPE, REEL	2-34166-1
1000	LOOSE PIECE	34166
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMMAX RECOMMENDED OPERATING
TEMPERATURE:
90°C [194°F]THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.DIMENSIONS:
mm [in]TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±-
2 PLC	±0.20 [0.008]
3 PLC	±-
4 PLC	±-
ANGLES	±-
FINISH	-

MATERIAL
BODY, CU PER ASTM B152
SLEEVE, PVC, BLUE

DWN 03NOV94

CHK 03NOV94

M ELLIS

APVD 03NOV94

G NGO

PRODUCT SPEC

UL486A

APPLICATION SPEC

-

WEIGHT -

CUSTOMER DRAWING

AMP Incorporated
Harrisburg, PA 17105-3608NAME
TERMINAL, SPADE,
PLASTI-GRIP,
WIRE SIZE, 16-14 AWG

SIZE

CAGE CODE

DRAWING NO

A3 00779 C-34166

SCALE 6:1

SHEET 1 OF 1

REV F

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTSPRODUCT INFORMATION CENTER
1-800-522-6752FOR APPLICATION
TOOLING INFORMATIONTOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

AMP 1470-19 REV 09MAY94