SHIELDED, 8POSITION KEYED
LOW PROFILE, SIDE ENTRY

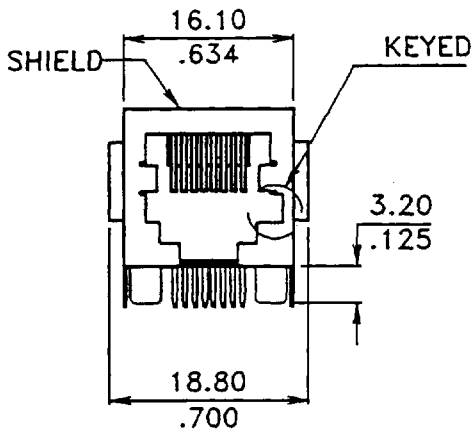

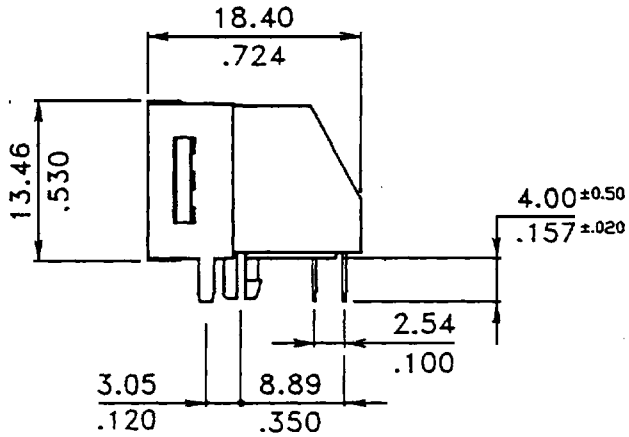

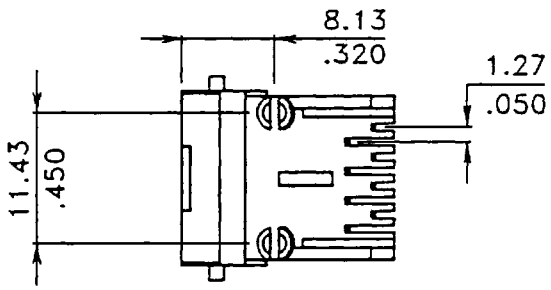

ORDERING INFORMATION

9606 – 6 4 0 1

SERIES INDICATOR

HOUSING PLUG SIZE 4,6,8 or 10

NO. OF CONTACT POSITIONS FILLED 2,4,6,8 or 10

PLATING
1=15 uin gold
2=30 uin gold
3=50 uin gold
4=6 uin gold

BODY COLOR
0=GRAY
1=BLACK
X=OTHERS

PART NO. 9658-880X
10100X

MATERIAL: HOUSING–PBT POLYESTER UL94V–0
STANDRED COLOR–BLACK
TERMINAL–.0138(0.35MM) THICK
PHOS–BRONZE PLATED WITH
HARD GOLD AND TIN LEAD
IN SOLDER AREA.
SHIELD–.010(.25MM)THICK COPPER
ALLOY,TIN–LEAD PLATED.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

.10P10C also avaliable.

.SMT type be optional

UL FILE NO. E135545

FCC FILE NO. E157380

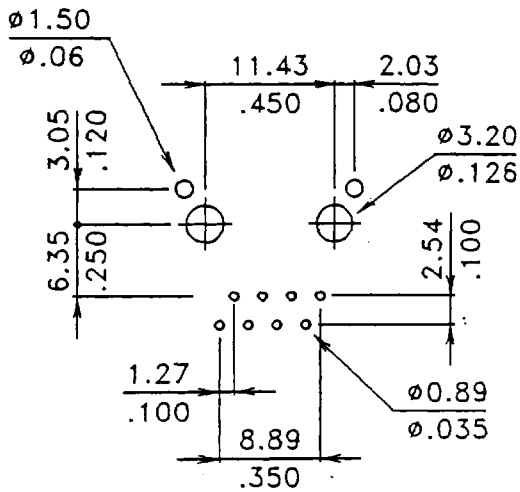

PC Board Layout

SHOGYO INTERNATIONAL CORP.
45 EXECUTIVE DRIVE
PLAINVIEW, N.Y. 11803
TEL # 516-349-5200
FAX # 516-349-7744