FLTWC0311-24-4 - ACTIVE

FlexLite

TE Internal #: 169809-000 Hook Up Wire, FlexLite TW, 600V Voltage Rating, Orange Wire Color, 24AWG Wire Size, .2mm² Wire Size, Operating Temperature Range -65 – 135 °C

View on TE.com >

Wire & Cable > Hook Up Wire



Cable Type: FlexLite TW Voltage Rating: 600 V Wire Color: Orange Insulation Material: Flame-Retardant, Modified Polyester Conductor Material: Tin-Coated Copper

Features

Product Type Features

Product Type

Product Classification

Wire

Wire - Commercial



Cable Style	Primary, Stranded
Cable Type	FlexLite TW
Configuration Features	
Number of Conductors	1
Number of Strands	19
Electrical Characteristics	
Resistance (Max)	25.4 Ω/1000 ft @ 68°F
Voltage Rating	600 V
Body Features	
Weight	2.83 kg/km
Wire Color	Orange
Insulation Material	Flame-Retardant, Modified Polyester
Conductor Material	Tin-Coated Copper
Dimensions	
Wire Diameter	1.067 mm[.042 in]

FLTWC0311-24-4

Hook Up Wire, FlexLite TW, 600V Voltage Rating, Orange Wire Color, 24AWG Wire Size, .2mm² Wire Size, Operating Temperature Range -65 – 135 °C



Overall Outside Diameter	1.02 mm[.0402 in]
Overall Outside Diameter Range	.97 – 1.07 mm[.038 – .042 in]
Conductor Diameter	.6 mm[.024 in]
	24 AWG
Cable Insulation Thickness	.153 mm
Strand Size	36 AWG
Wire Size	.2 mm ²
Usage Conditions	
Operating Temperature Range	-65 – 135 °C
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JUL 2019 (201)

Halogen Content

Does not contain REACH SVHC

Out of Scope - excluded from Halogen requirements

Not applicable for solder process capability

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts


FLTWC0311-24-4

Hook Up Wire, FlexLite TW, 600V Voltage Rating, Orange Wire Color, 24AWG Wire Size, .2mm² Wire Size, Operating Temperature Range -65 – 135 °C



E TE
TE Model / Part # 650074-000 D-436-36

Customers Also Bought

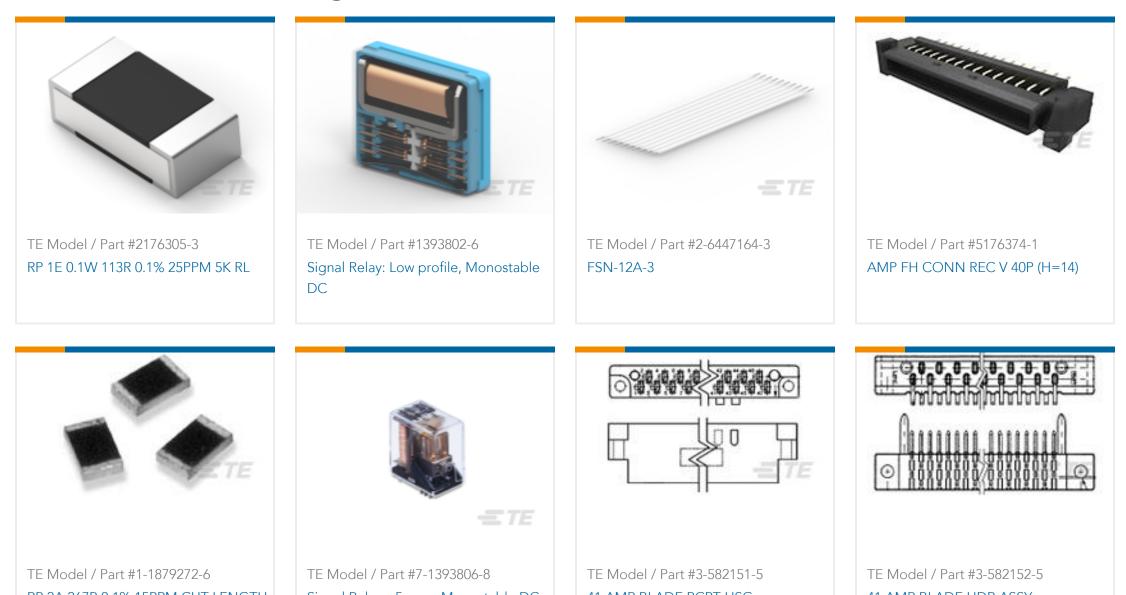

RP 2A 267R 0.1% 15PPM CUT LENGTH

Signal Relays: 5 amp, Monostable DC



Documents

Product Drawings FLTWC0311-24-4

English

Datasheets & Catalog Pages 1654025_Sec9_FlexLite English

Wire and Cable Overview

English

C For support call+1 800 522 6752

FLTWC0311-24-4

Hook Up Wire, FlexLite TW, 600V Voltage Rating, Orange Wire Color, 24AWG Wire Size, .2mm² Wire Size, Operating Temperature Range -65 – 135 °C



Product Specifications Product Specification

English