

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/19/10	

APPROVED: _____

DATE: _____ TITLE: _____

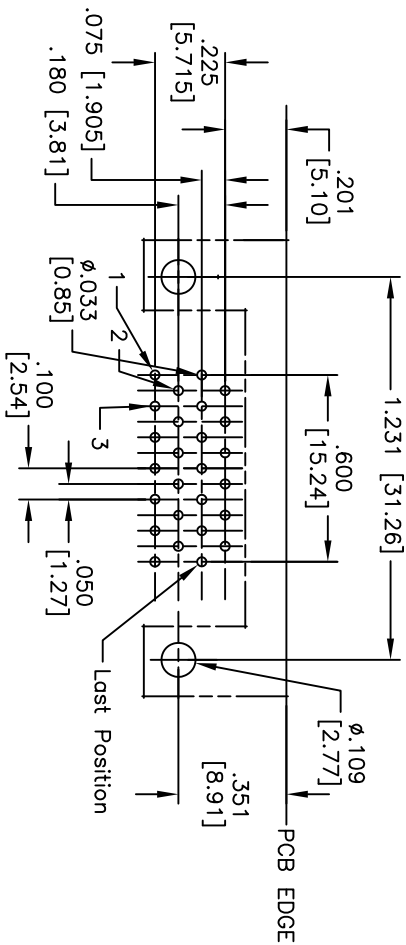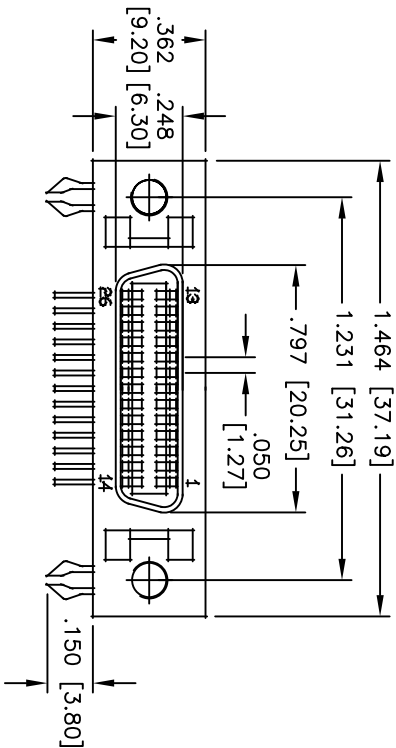

RECOMMENDED PCB LAYOUT

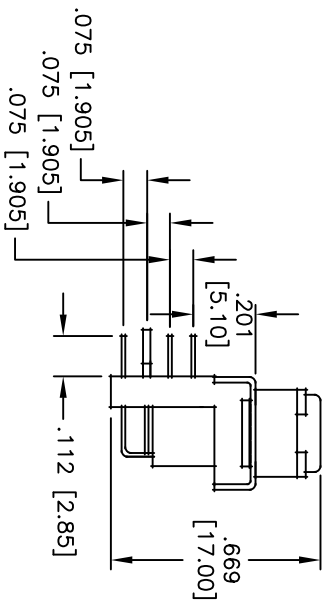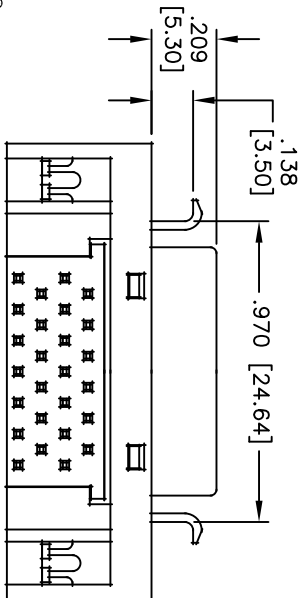

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Front Shell: Steel, Nickel plated

Bracket: Steel, Nickel plated

Boardlock: Brass, Tin plated

Plating:

Gold flash over Nickel underplate on mating area,

Tin over Copper underplate on tails

Electrical:

Current rating: 1 Amp max

Contact resistance: 35 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

SCSI III/III SOCKET, R/A, W/LATCH BLOCKS

BOARDLOCKS, M.2.6 MOUNTING HOLES

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE			
INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
.XXX	± .015	ØXXX	± .010	.XXX	± .010	ØXXX	± .010
APPROVALS				DATE			
DRAWN	DR		11/19/10	SIZE			
CHECKED				PART NO.			
APPROVED				S2A-SR-26-3-BL-3-A			
REF: S00105T				SCALE: NTS			
				SHEET 1 OF 1			