


## Typ ST16..

- 5,00 mm pin spacing
- 2 .. 24-poles single mold
- horizontal header
- selective loading possible
- not to be connected or disconnected under electrical load
- open end

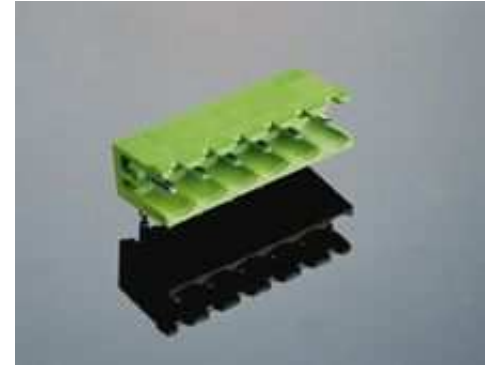

Rated voltage	<b>cULus</b> 300 V	<b>VDE</b> 250 V
Rated current	15 A	12 A
Rated impulse voltage		4 kV
Pollution degree		3
<b>Dimensions</b>	Spacing PCB hole diameter	5,00 mm 1,4 mm
<b>Materials</b>	Insulating material Flammability class Temperature range	PA UL 94 V-0 -30°C/+105°C
<b>Colour</b>	Contact pin RAL 6018	Cu green

### Dimensions

