


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₁	REVISED	12/16/93	M.M.

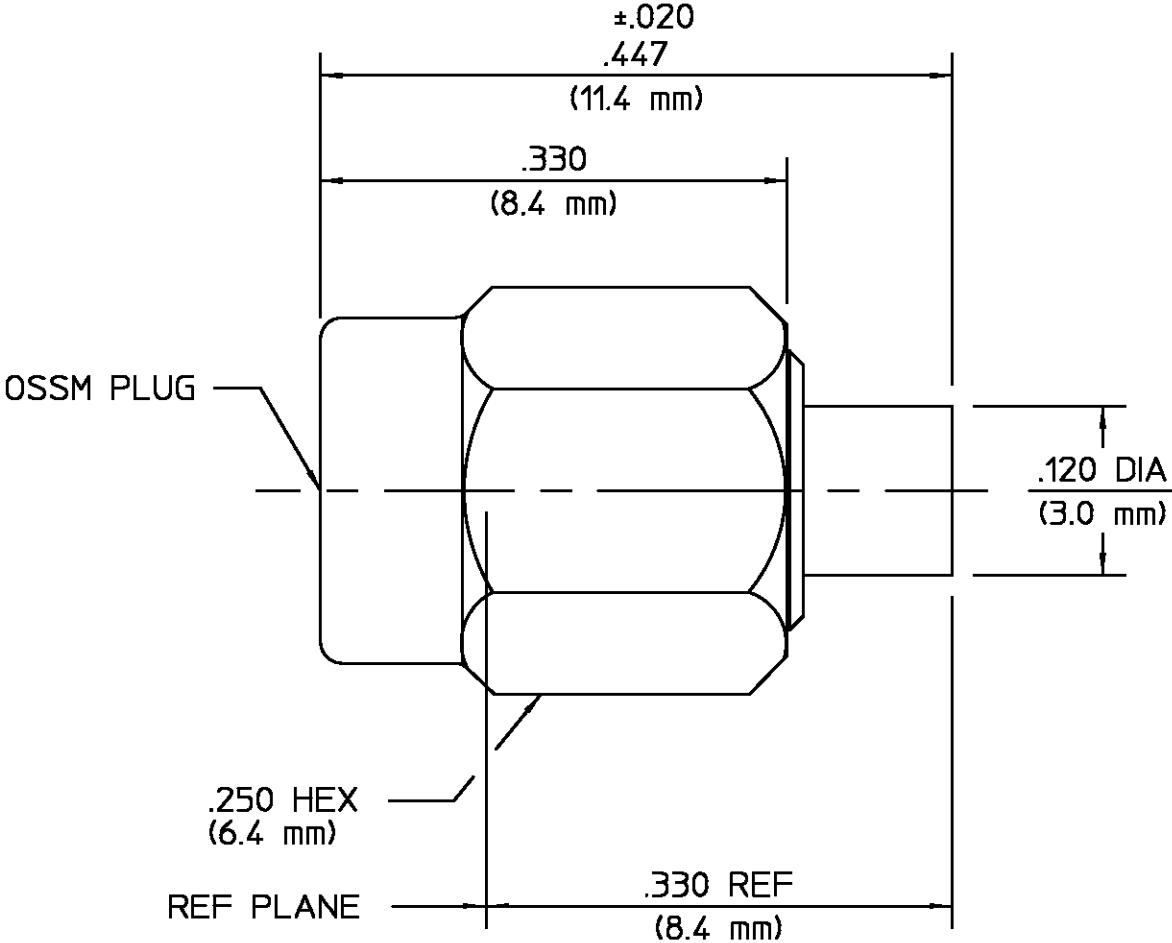

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER MIL-C-26074
COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A

COMPONENT	MATERIAL	FINISH
-----------	----------	--------

NOTES:
1. DESIGNED FOR USE WITH .085 DIA SEMI-RIGID CABLE

CABLE ENTRY DIAMETER MINIMUM		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON		DRAWN BY K.C.MAHER DATE 12/19/88		AMP Incorporated	
HOUSING	.089	FRAC.	DEC.	ANGLES	CHECKED BY BB 12-20-88	140 Fourth Avenue	Waltham, MA 02451-7599
CONTACT	.023	$\pm 1/64$	$\pm .005$	$\pm 1^\circ$	APPROD BY MCD 12-20-88	AMP	
		These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		USE ASS'Y PROCEDURE		TITLE OSSM STRAIGHT CABLE PLUG DIRECT SOLDER ATTACHMENT	
				408-04795 (10-002)		SIZE B	CODE IDENT NO. 26805
				NO. AP.		1001-5004-19	REV 01 ₁
						SCALE 8:1	
						SHEET 1 OF 1	