

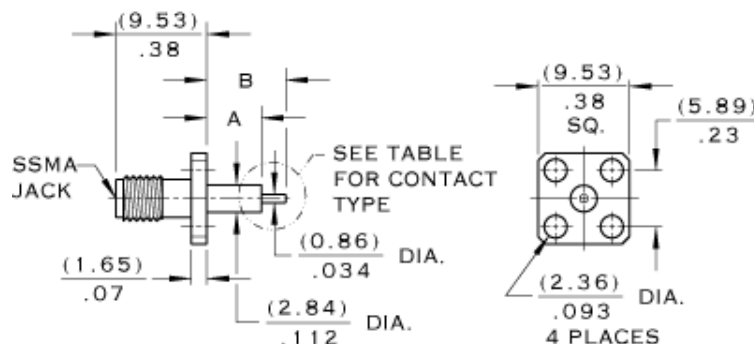

[ABOUT US](#) [PRODUCTS](#) [MINIBEND](#) [SUPPORT](#)

Search: in [Web Site](#)
[About Us](#)
[Products](#)
[minibend](#)
[mini 141](#)
[microbend](#)
[Contact Us](#)
[Online Catalog](#)
[Search](#)
[Request Catalog](#)
[Your Cart](#)

SSMA jack, flanged - 29109

[Catalog Home](#) -> [Microwave Connectors](#) -> [SSMA Interface](#) -> [Panel Mount Connectors](#) -> SSMA jack, flanged - 29109

SSMA jack, flanged 29109



- frequency 36 GHz max.
- figure [S1 flange](#) detail
- [contact type](#) reference information

PART NO.	CONTACT TYPE	A		B	
		IN.	MM	IN.	MM
29109-1C	1D	.035	0.89	.200	5.08
29109-2C	3F	.375	9.53	.500	12.70
29109-3C	4F	.000	0.00	.100	2.54
29109-4C	5F	.000	0.00	.100	2.54
29109-5C	3F	.040	1.02	.070	1.96

Select Part Number:

Enter Quantity:

[Click here](#) to view your cart.

Browse By Category

[Catalog Home](#)
[Microwave Cable Assemblies](#)
[Microwave Cable](#)
[Microwave Connectors](#)
[Contacts](#)

[Adaptors Between Series](#)
[Surge Protection Adaptors](#)
[Phase Shifters](#)
[Other Passive Components](#)

Tel: (732) 560-3800

Fax: (732) 560-9570

[Privacy Policy](#)
[Terms and Conditions](#)
[Email Support](#)