

MATERIALS AND FINISHES:

BODY, COUPLING NUT, CRIMP TUBE BRASS
PLATED NICKEL


CENTER CONTACT BRASS
PLATED GOLD OVER NICKEL

CABLE CONTACT BERYLLIUM COPPER
PLATED GOLD OVER NICKEL


OUTER CONTACT BERYLLIUM COPPER
PLATED NICKEL

INSULATOR TEFLON

GASKET SILICONE RUBBER

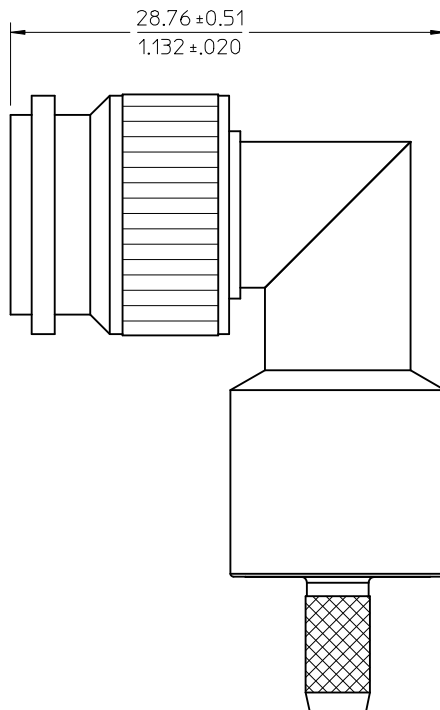



TNC PLUG
INTERFACE

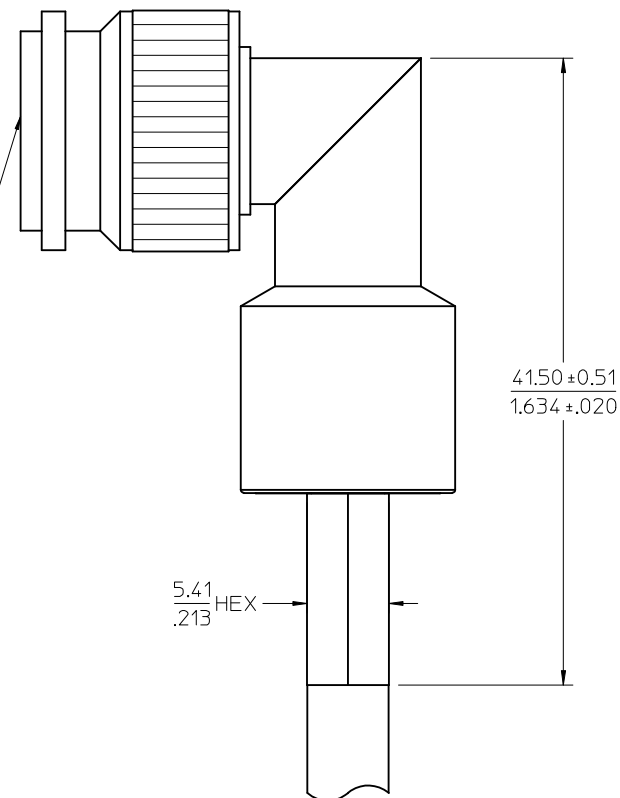



41.50 ± 0.51
1.634 ± 0.020

5.41
.213 HEX

15.73 ± 0.13
.619 ± 0.005

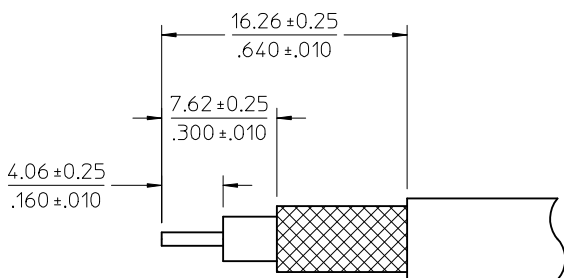

RECOMMENDED STRIPPING DIMENSIONS

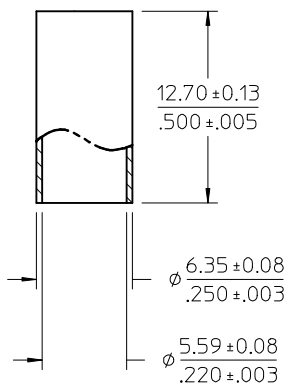

PART # 73216-2060

MIL-STD-348A, FIG. 313.1	INTERFACE
SPECIFICATION	DESCRIPTION

CHG: REMOVED REF FROM ALL DIMS. ADDED TOLERANCE. EC NO: URF2009-0722 DRWN: ROBERTSON 2009/06/05 CHKD: SSS 2009/06/05 APPR: JWIENER 2009/06/05 B1	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± ---		DRAWN BY DATE SSS 2009/02/04		TITLE	TNC PLUG, R/A, RG223 50 OHMS, EWR-3923 TNC-PC/RA	MOLEX INCORPORATED	SHEET NO. 1 OF 1
		ANGULAR ± 2 °		CHECKED BY DATE AZR 2009/02/04		DOCUMENT NO.			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE JDW 2009/02/04		MATERIAL NO. 732162060		SD-73216-206	