


EH11 Series



- Crystal Clock Oscillators
- CMOS/TTL Output
- +5.0V Supply Voltage
- Tri-State Output Function
- Custom Lead Length & Gull Wing Options
- 14 pin DIP Metal Package
- RoHS Compliant (Pb-free)

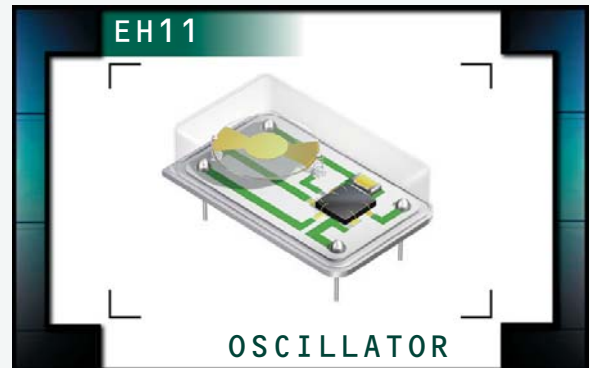

ELECTRICAL SPECIFICATIONS

Frequency Range	1.000MHz to 155.520MHz		
Operating Temperature Range	0°C to 70°C or -40°C to 85°C		
Storage Temperature Range	-55°C to 125°C		
Supply Voltage (V_{DD})	5.0V _{DC} ±10%		
Input Current	50mA Maximum (Unloaded)		
Frequency Tolerance / Stability	Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, First Year Aging at 25°C, Shock, and Vibration	±100ppm, ±50ppm, ±25ppm, or ±20ppm Maximum	
Output Voltage Logic High (V_{OH})	w/TTL Load	2.4V _{DC} Minimum	I _{OH} = -16mA
	w/CMOS Load	V _{DD} -0.4V _{DC} Minimum	I _{OH} = -16mA
Output Voltage Logic Low (V_{OL})	w/TTL Load	0.4V _{DC} Maximum	I _{OL} = +16mA
	w/CMOS Load	0.5V _{DC} Maximum	I _{OL} = +16mA
Duty Cycle (V_{DD}=5.0V_{DC})	at 1.4V _{DC} w/TTL Load; at 50% of waveform w/CMOS Load (≤70.000MHz)	50 ±10(%) (Standard)	
	at 50% of waveform w/ TTL Load or w/CMOS Load (>70.000MHz)	50 ±10(%) (Standard)	
	at 50% of waveform w/TTL Load or w/CMOS Load	50 ±5(%) (Optional)	
Rise Time / Fall Time	0.8V _{DC} to 2.0V _{DC} w/TTL Load or 20% to 80% of Waveform w/CMOS Load (≤70.000MHz)	6 nSeconds Maximum	
	0.8V _{DC} to 2.0V _{DC} w/TTL Load or 20% to 80% of Waveform w/CMOS Load (>70.000MHz)	4 nSeconds Maximum	
Tri-State Input Voltage	V _{IH} :No Connection	Enables Output	
	V _{IH} :≥2.2V _{DC}	Enables Output	
	V _{IL} :≤0.8V _{DC}	Disables Output: High Impedance	
Aging (at 25°C)	±5ppm / year Maximum		
Start Up Time	10 mSeconds Maximum		
Load Drive Capability	≤70.000MHz	10TTL Load or 50pF CMOS Load Maximum	
	>70.000MHz	5TTL Load or 15pF CMOS Load Maximum	
Period Jitter: Absolute	±250pSec Maximum, ±100pSec Typical		
Period Jitter: One Sigma	±50pSec Maximum, ±30pSec Typical		

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EH11

PACKAGE
14 Pin DIP

VOLTAGE
5.0V

CLASS
OS44

REV. DATE
12/05

PART NUMBERING GUIDE

EH11 00 ET TS - 70.000M - G

FREQUENCY TOLERANCE / STABILITY

00=±100ppm Max., 45=±50ppm Max.
25=±25ppm Max., 20=±20ppm Max.

OPERATING TEMP. RANGE

Blank=0°C to 70°C, ET=-40°C to 85°C

DUTY CYCLE

Blank=50 ±10(%), T=50 ±5(%)

AVAILABLE OPTIONS

Blank=None
CLXXX=Custom Lead Length
G=Full Size Gull Wing


FREQUENCY

OUTPUT CONTROL FUNCTION


TS=Tri-State Enable High

NOTES

MECHANICAL DIMENSIONS
ALL DIMENSIONS IN MILLIMETERS

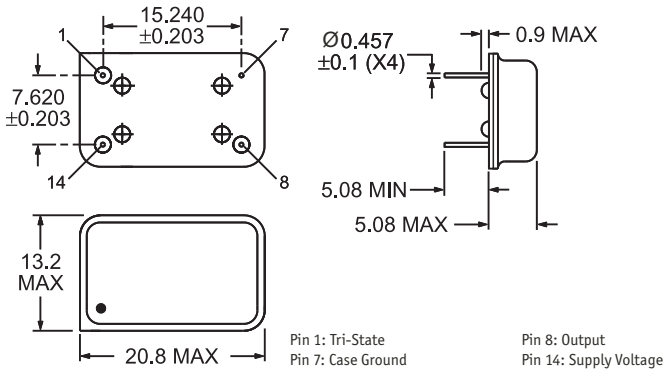

MARKING SPECIFICATIONS

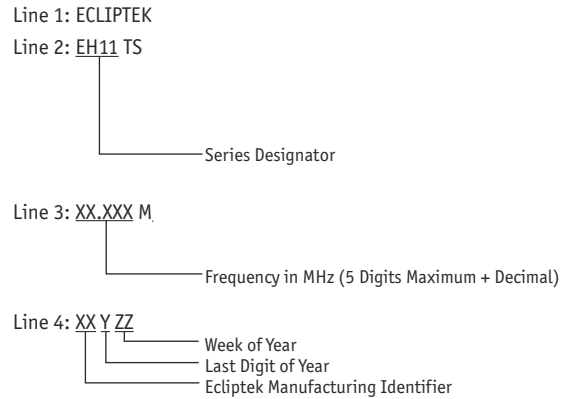

Note: Pin 1 shall be designated with a dot

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic	Specification
Fine Leak Test	MIL-STD-883, Method 1014, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C
Mechanical Shock	MIL-STD-202, Method 213, Condition C
Vibration	MIL-STD-883, Method 2007, Condition A
Lead Integrity	MIL-STD-883, Method 2004

Characteristic	Specification
Solderability	MIL-STD-883, Method 2002
Temperature Cycling	MIL-STD-883, Method 1010
Resistance to Soldering Heat	MIL-STD-883, Method 210
Resistance to Solvents	MIL-STD-883, Method 215

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EH11	14 Pin DIP	5.0V	OS44	12/05