

HIGH FREQUENCY MAGNETICS

T1/E1 Dual Interface Transformers

TM00129

- Designed to meet the requirements for UL 1950 reinforced insulation
- Minimum interwinding breakdown voltage of 3000 Vrms


ELECTRICAL SPECIFICATIONS at 25° C

Part Number	Turns Ratio ±5%		Primary Inductance* mH min	Leakage Inductance μH max	Interwinding Capacitance pF max	DCR Ω max			
						Pri		Sec	
	Coil A	Coil B	Coil A & B	Coil A & B	Coil A & B	Coil A	Coil B	Coil A	Coil B
S553-6500-62	1 CT : 2 CT	1 CT : 1 CT	1.5	0.6	15	0.50	0.50	1.00	0.50
S553-6500-63	1 CT : 1.15 CT	1 CT : 1 CT	1.5	0.6	15	1.00	1.00	1.00	1.00


* Measured at 10 kHz, 0.01 Vac

SCHEMATICS

S553-6500-62

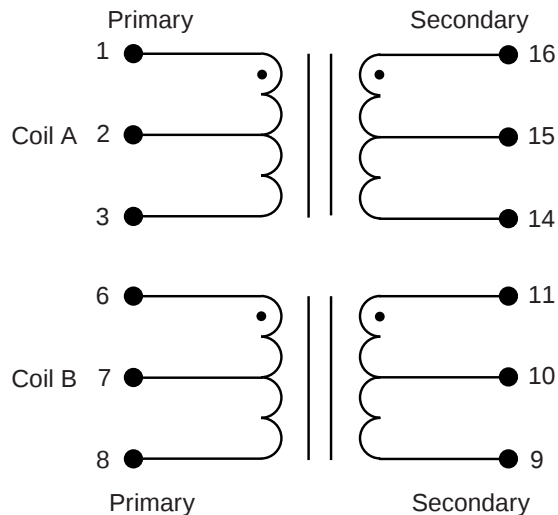


S553-6500-63

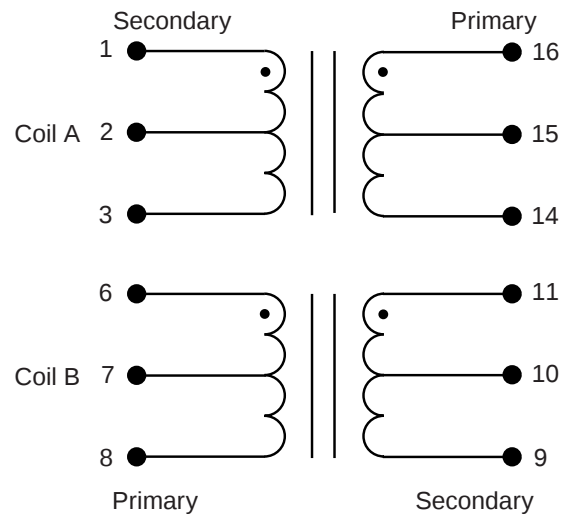

MECHANICAL

S553-6500-62
S553-6500-63

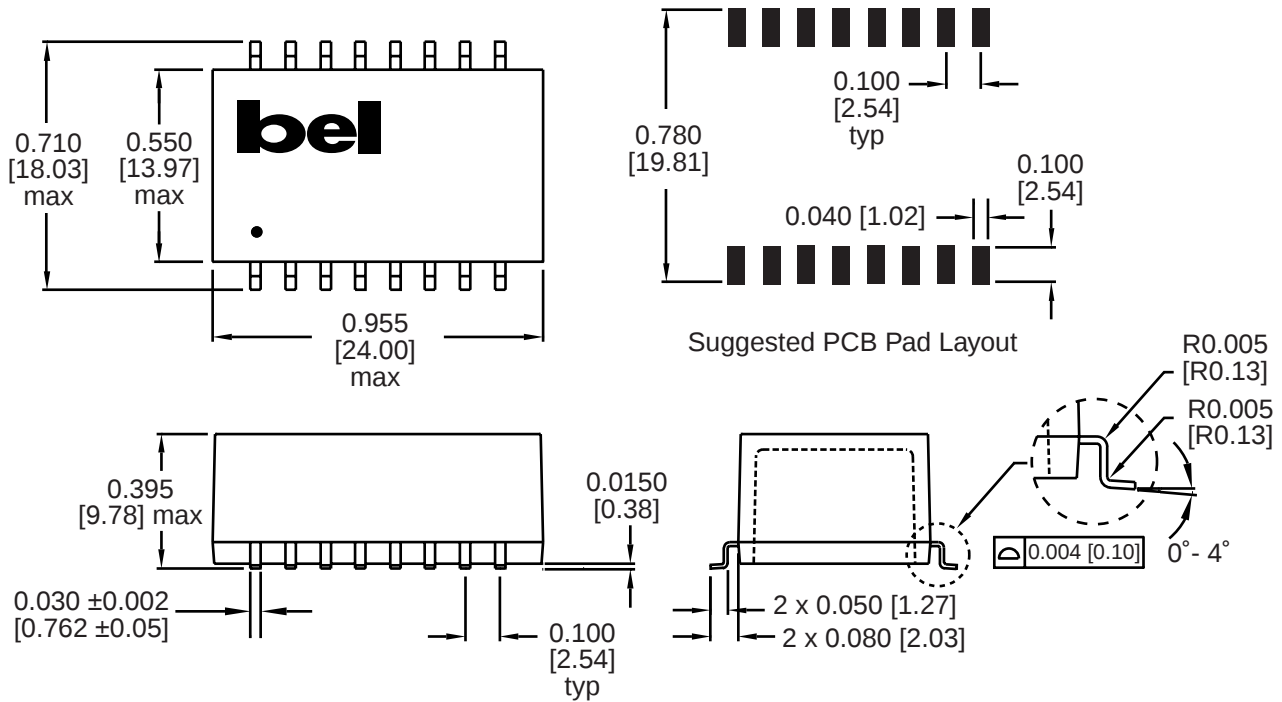

Dimensions are in inches [millimeters].
Standard dimension tolerance is ±0.005 [0.13] unless otherwise noted.

©2000 Bel Fuse Inc. Specifications subject to change without notice. 05.00

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

T1-66

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com