
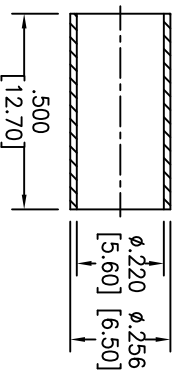
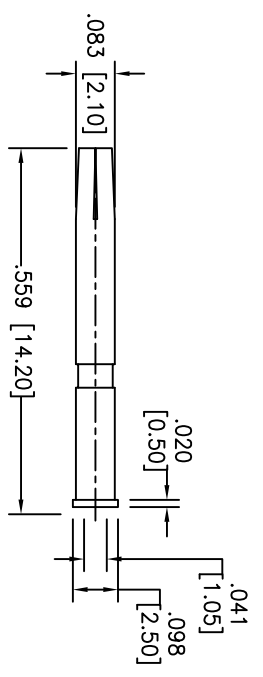


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-	10078	RELEASED	3/17/10	
A	10078	REVISED DIM.	8/18/10	

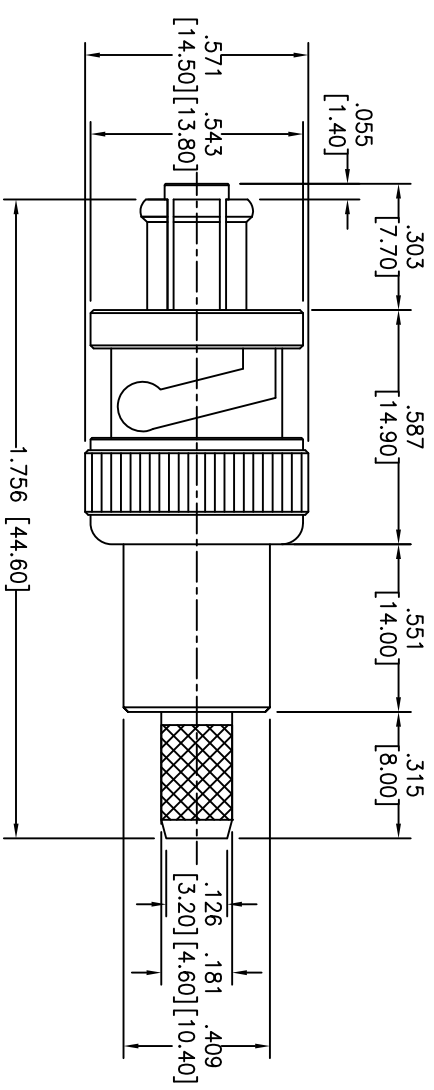

DESCRIPTION	MATERIAL	FINISH
GASKET	RUBBER	ORANGE
RETAINING RING	SK-5	NICKEL
SPRING	SK-5	NICKEL
WASHER	IRON	NICKEL
SHELL	BRASS	NICKEL
FERRULE	BRASS	NICKEL
DIELECTRIC	TEFLON	NONE
PIN	BRASS	GOLD
BODY	BRASS	NICKEL
DESCRIPTION	MATERIAL	FINISH

**SPECIFICATIONS:**

Electrical:  
 Nominal Impedance: 50 ohms  
 Frequency range: DC up to 300MHz  
 Working Voltage: 3500 VRMS max.  
 Dielectric Withstanding Voltage: 5000 VRMS min.  
 Contact Resistance: 2 Milliohms max. (Inner Conductor)  
 1.5 Milliohms max. (Outer Conductor)  
 Insulator Resistance: 5000 Megohms min.  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES  
 .X ± .10  
 .XX ± .020  
 .XXX ± .015  
 HOLES  
 Ø.X ± .10  
 Ø.XXX ± .015  
 APPROVALS  
 DRAWN DY 3/17/10  
 CHECKED  
 APPROVED

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710  
 TITLE: SHV MALE CRIMP FOR RG58

SIZE	PART NO.	REV.
X	RF-46-01-T-01-50	A
REF:	S0001T	SCALE: NTS
SHEET 1	OF 1	