



Machine Pin Socket SMT / Right Angle / Straight Type 1.27mm

Specifications



Current Rate: 1 AMP
 Insulation Resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$.
 Contact Resistance: $\leq 4\text{m}\Omega/\text{Contact}$.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to $+105^\circ\text{C}$

Material



Insulator: Polyester, UL 94V-0
 ©Standard: PPS
 Terminal: Copper Alloy
 Plated: Selective Gold

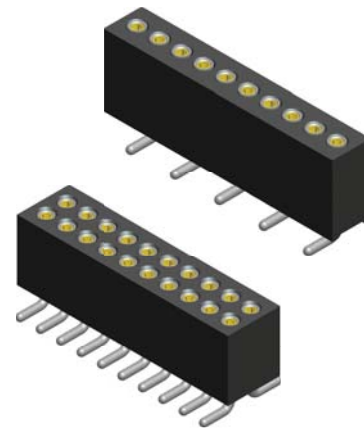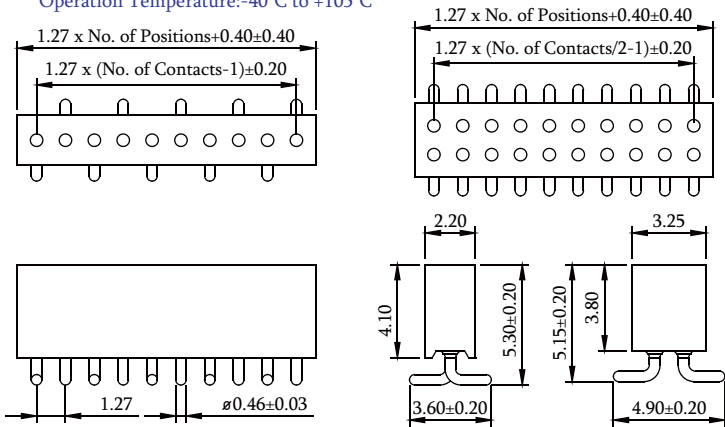

Part No.: MS3M-1/2XX-U

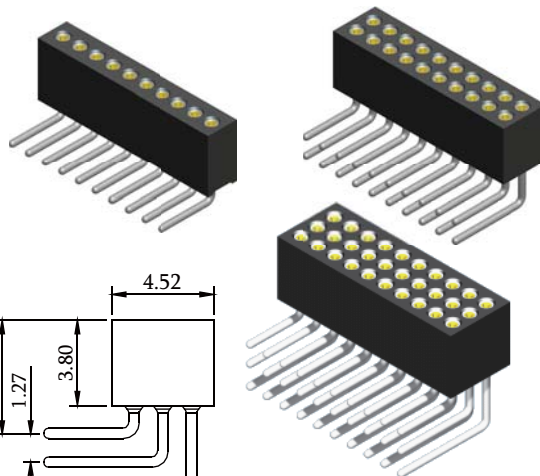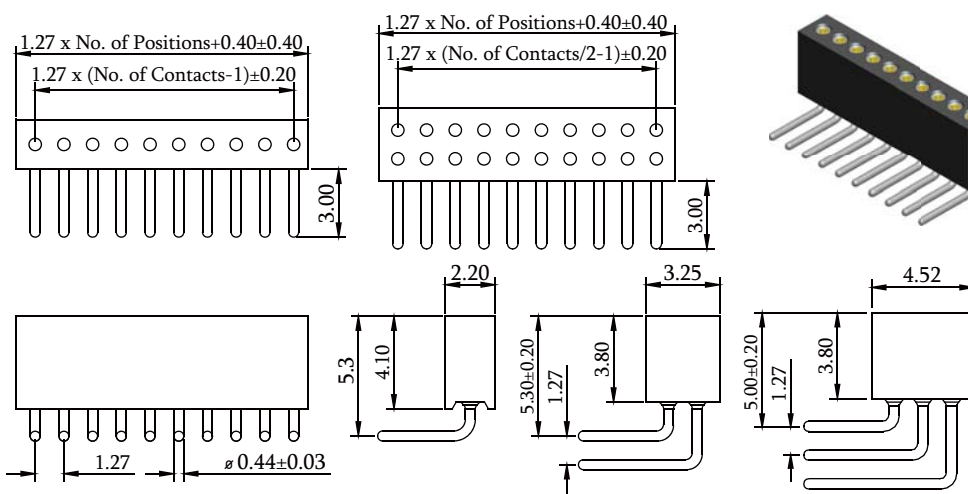


Part No.: MS3R-1/2XX-U

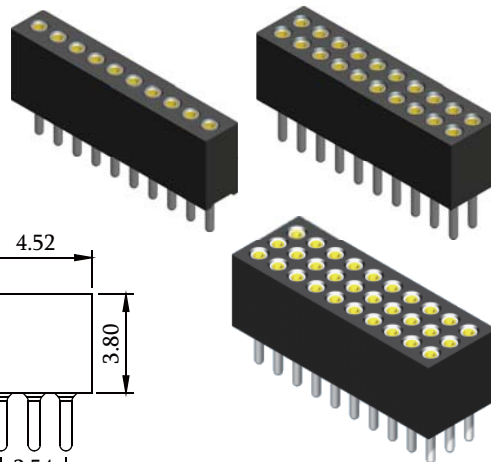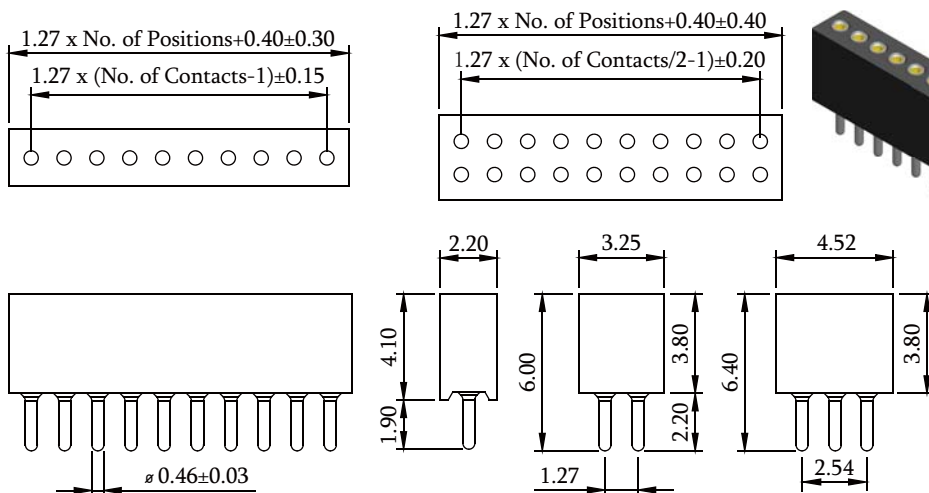

Part No.: MS3S-1/2XX-U

ORDER INFORMATION

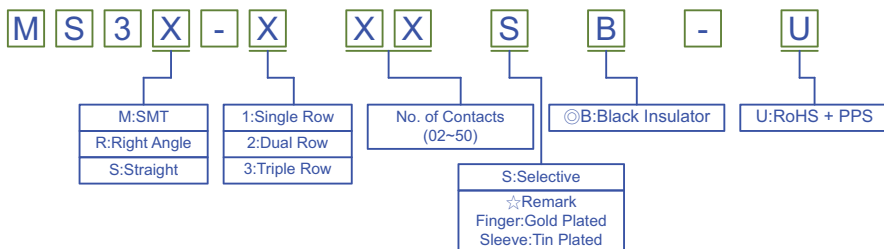

©Standard Recommended