




Toggle shown in pos. 1

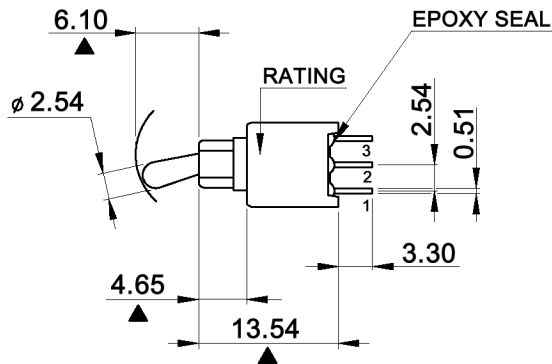

P.C. MOUNTING



CONTACT ARRANGEMENT:

code for x	function	toggle in position 1	toggle opposite to pos. 1
D	On-On	2-3	1-2
F	On-Mom		

code for x	function	toggle in position 1	toggle in center	toggle opposite
E	On-Off-On	2-3	open	1-2
G	Mom-Off-Mom			
H	On-Off-Mom			

Specifications:

Contact rating: 0.4VA max.; 20V max. (AC or DC)
 Contact resistance: 20mOhm max. at 2-4V DC
 Insulation resistance: 1 000MOhm min.
 Dielectric strength: 1 000V RMS
 Operating temperature: -30°C to +85°C
 Mechanical life: 50 000 make-and-break cycles
 Material: Case / bushing: glass filled nylon 6/6, retardant, heat stabilized (UL94V-0)
 Actuator: brass, chrome plated
 Terminals / contact: gold plated copper



Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm			Date 06/07	Name dr	TST 1 x	
			knitter-switch			Page
Revised	10/09	dr				1/1
Modifications	Date	Name				

30 11 41