


(TLP1230(C4))

PIN CONNECTION



MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Forward Current	I_F	50	mA
Forward Current Derating	$\Delta I_F / ^\circ C$	Ta > 25°C	-0.33
		Ta > 85°C	-2
Reverse Voltage	V_R	5	V
Collector-Emitter Voltage	V_{CEO}	35	V
Emitter-Collector Voltage	V_{ECO}	5	V
Collector Power Dissipation	P_C	75	mW
Collector Power Dissipation Derating (Ta > 25°C)	$\Delta P_C / ^\circ C$	-1	mW / °C
Collector Current	I_C	50	mA
Operating Temperature Range	T_{opr}	-25~95	°C
Storage Temperature Range	T_{stg}	-40~100	°C


OPTO-ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
LED	Forward Voltage	V_F	$I_F = 10mA$	1.00	1.15	1.30	V
	Reverse Current	I_R	$V_R = 5V$	—	—	10	μA
	Peak Emission Wavelength	λ_P	$I_F = 20mA$	—	940	—	nm
DETECTOR	Dark Current	I_D	$V_{CE} = 24V, I_F = 0$	—	—	0.1	μA
	Peak Sensitivity Wavelength	λ_P	—	—	870	—	nm
COUPLED	Current Transfer Ratio	I_C / I_F	$V_{CE} = 5V, I_F = 20mA$	5	—	100	%
	Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_F = 20mA, I_C = 0.5mA$	—	0.15	0.4	V
	Rise Time	t_r	$V_{CC} = 5V, I_C = 2mA$ $R_L = 100\Omega$	—	6	—	μs
	Fall Time	t_f		—	6	—	

(TLP1230(C4))

TERMINAL STRENGTH (Ta = 25°C)

CHARACTERISTIC	TEST CONDITION		LIMIT
	DIRECTION	A	
PULL	WEIGHT	19.6N	NO DEFECT OF ELECTRICAL CHARACTERISTICS
	TIME	5s/ ONCE	
	DIRECTION	B	
BEND	WEIGHT	9.8N	
	TIME	5s/THRICE	
	DIRECTION	A	



PRECAUTION

Please be careful of the followings.

1. When installing, avoid to work by holding the connector by hand. Always, install by holding the main body of the element while assuring the mounting board is not warped or twisted. The connectors shall be inserted or pulled out at normal temperature.
2. It is recommended to mount this product by inserting from the sheet metal pressed side.
3. The container is made of polycarbonate. Polycarbonate is usually stable with acid, alcohol, and aliphatic hydrocarbons however, with peroxochemicals (such as benzene, toluene, and acetone), alkali, aromatic hydrocarbons, or chloric hydrocarbons, polycarbonate becomes cracked, swollen, or melted. Please take care when choosing a packaging material by referencing the table below.

<Chemicals to avoid with polycarbonate>

	PHENOMENON	CHEMICALS
A	Little deterioration but staining	<ul style="list-style-type: none"> • nitric acid (low concentration), hydrogen peroxide, chlorine
B	Cracked, crazed, or swollen	<ul style="list-style-type: none"> • acetic acid (70% or more) • gasoline • methyl ethyl ketone, ethyl acetate, butyl acetate • ethyl methacrylate, ethyl ether, MEK • acetone, m-amino alcohol, carbon tetrachloride • carbon disulfide, trichloroethylene, cresol • thinners, oil of turpentine • triethanolamine, TCP, TBP
C	Melted { } : Used as solvent.	<ul style="list-style-type: none"> • concentrated sulfuric acid • benzene • styrene, acrylonitrile, vinyl acetate • ethylenediamine, diethylenediamine • {chloroform, methyl chloride, tetrachloromethane, dioxane, } • {1, 2-dichloroethane }
D	Decomposed	<ul style="list-style-type: none"> • ammonia water • other alkali

6

TLP1230(C4)/(C5)

(TLP1230(C4))

RECOMMENDABLE MATCHED CONNECTOR

- TLP1230 (C4) • TLP1230 (C5)

Molex Japan made connector (Low profile type)

HOUSING	51004-0300				
TERMINAL	TYPE No.	PRODUCT FORM	MATERIAL	AWG SIZE	INSULATION COATED SIZE
	50011-8100	LOOSEN	PHOSPHOR BRONZE	AWG24~30	1.4mm MAX
	50011-8000	LINKED			
	50031-8100	LOOSEN		AWG30~34	0.9mm MAX
50031-8000	LINKED				

- TLP1230 (C5)


AMP Japan Ltd. made CT connector

HOUSING-TERMINAL EN BLOCK TYPE	TYPE No.	TERMINAL MATERIAL	AWG SIZE	INSULATION COATED SIZE
	173977-3	PHOSPHOR BRONZE	AWG 26~28	0.85~1.05mm







For details of the connectors, please refer to the maker.

PRODUCT INDICATION





TYPE	ABBREVIATION	CONNECTOR CLASSIFICATION
TLP1230 (C4)	P1230	C4
TLP1230 (C5)	P1230	C5

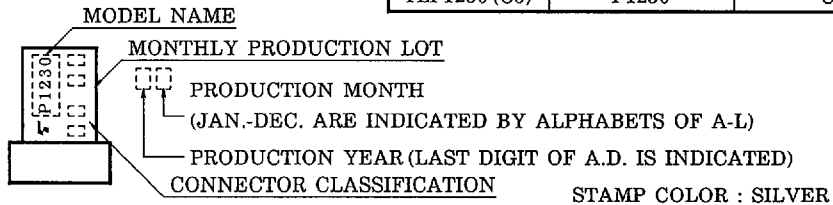





(TLP1230(C4))

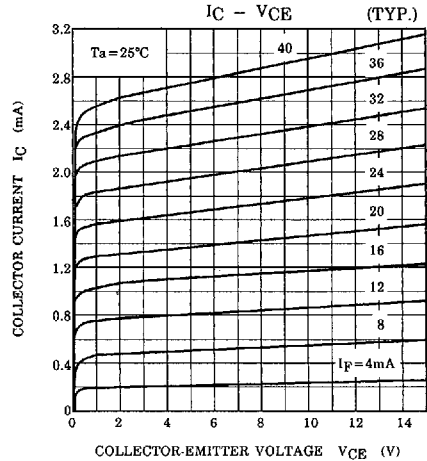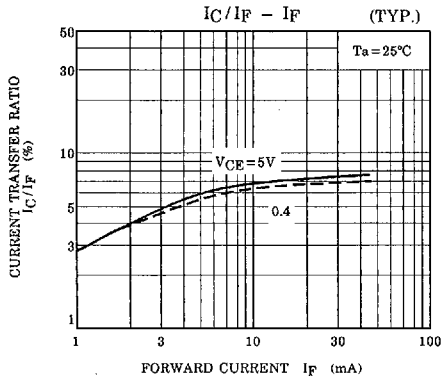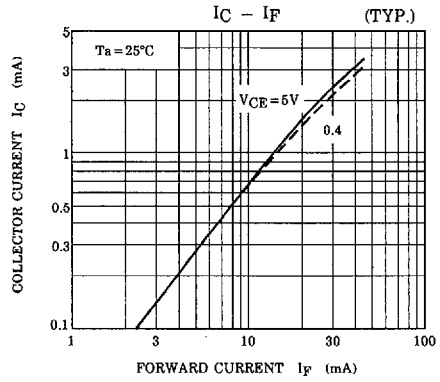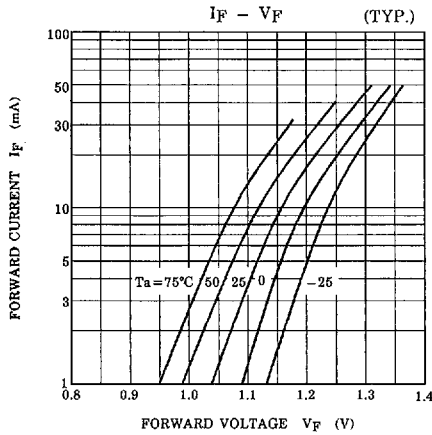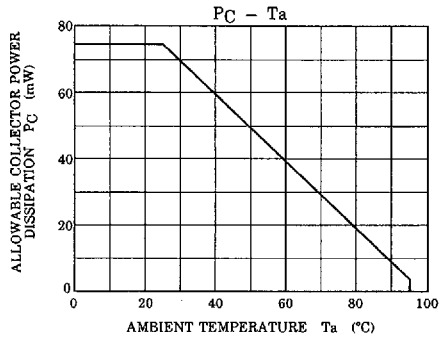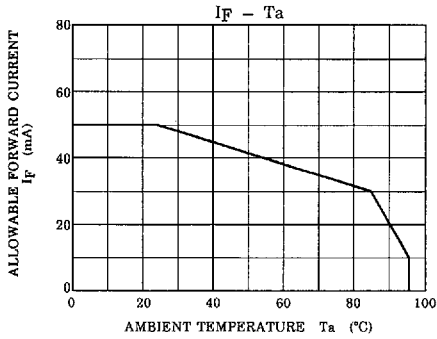


(TLP1230(C4))

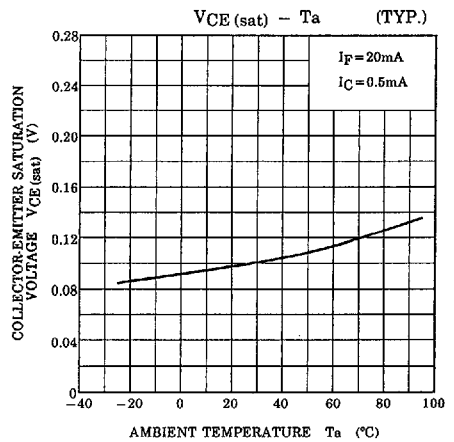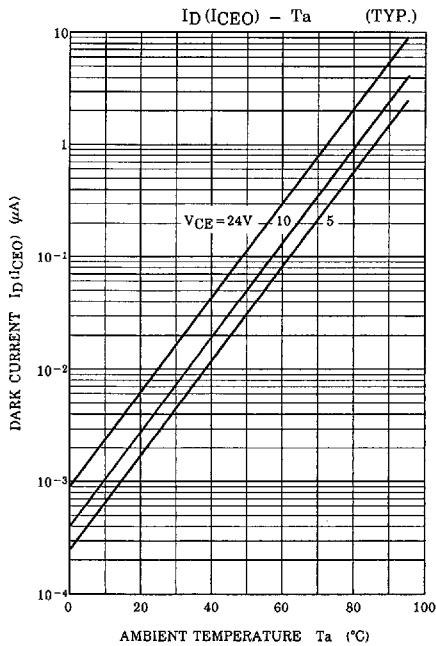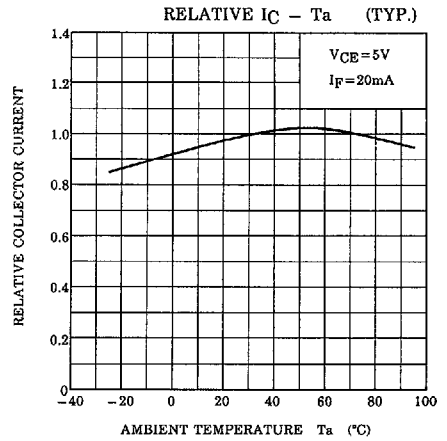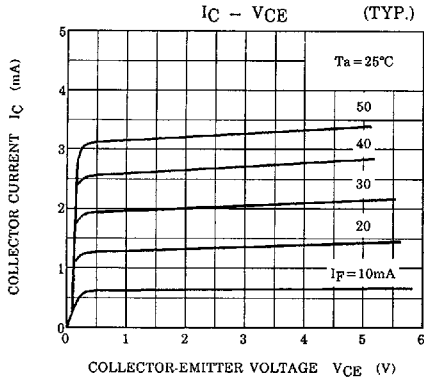

(TLP1230(C4))

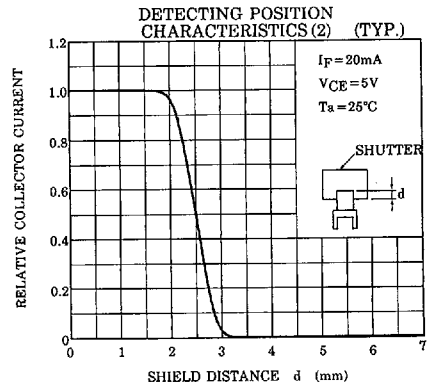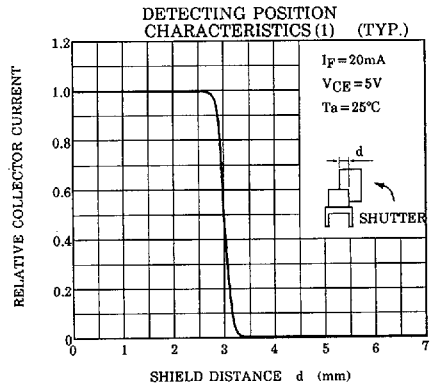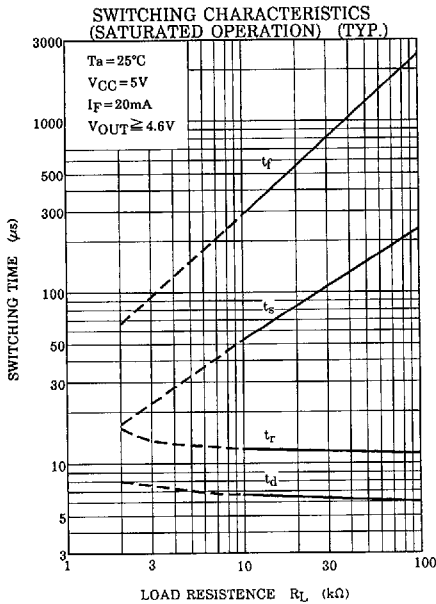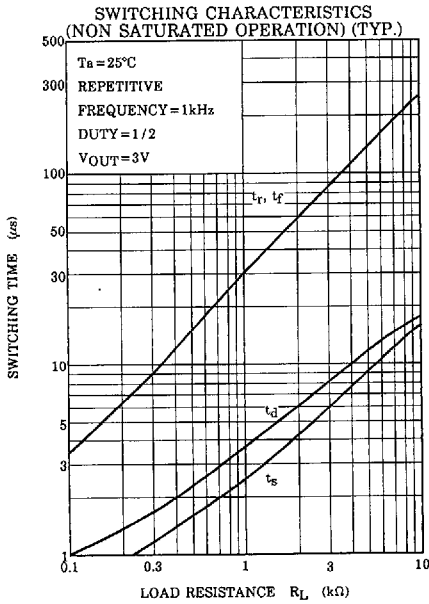

SWITCHING TIME TEST CIRCUIT

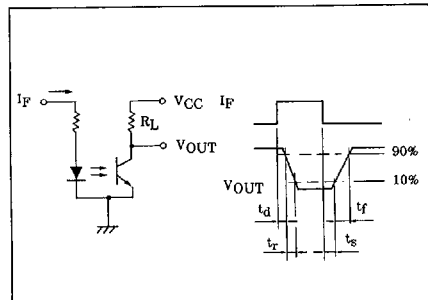


(TLP1230(C4))

DESIGN SLIT FOR ROTATING LIGHT BLOCKING BOARD.


Design the pitch between slits taking the following into consideration:
release time, light block time, and switching time of photo interrupter when the disk is rotating.

UNIT IN mm

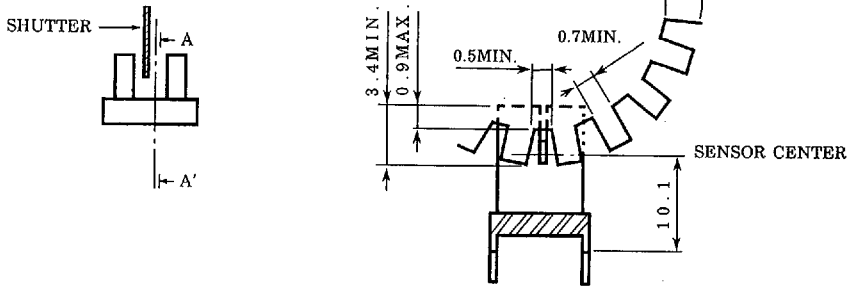


A-A' CROSS SECTION


RECOMMENDED MOUNTING HOLE



MOUNTING AWAY



FOR THICKNESS
1.0mm



FOR THICKNESS
1.2mm