



### TYPES YAE-N-F BOX AND YAE-N-F



#### INSULUG™

TERMINAL -  
NYLON INSULATED,  
FORK TONGUE

MULTI-FINGER  
INSULATION GRIP

300 VOLT MAX. 105° C MAX

INSULUG™ type YAE-N-F nylon insulated terminals are designed with a Multi-Finger Insulation grip, are rated 105°C and are supplied with a fork tongue for easy terminal insertion and removal.

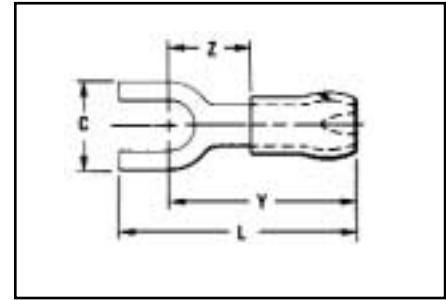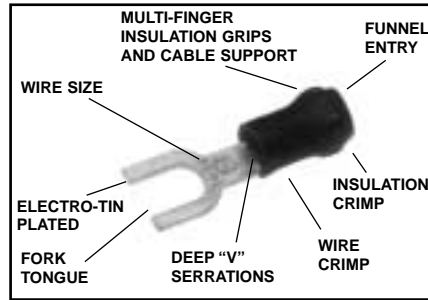

#### Features and benefits

- Fork tongue.
  - Permits rapid easy installation of the terminal under the screw head without complete removal of the screw.



CATALOG NUMBER	WIRE RANGE	STUD SIZE	DIMENSIONS				BULK CATALOG NUMBER	INSTALLATION TOOLING	TAPE MOUNTED CATALOG NO. 2000/Reel	INSTALLATION TOOLING	WIRE STRIP LENGTH
			C	L MAX	Y MAX	Z MIN					
YAE22N65F BOX*	24-20 MAX. INSUL. DIA.: .098" SLEEVE COLOR: AMBER	1-2	.18	.73	.65	.24	YAE22N65F*	RATCHET: M8ND N14HET25V1 DIE	YAE22N65FM*	TFM WITH DFM11D1 DIE	5/32"
YAE22N66F BOX*		4-6	.28	.80	.70	.28	YAE22N66F*		YAE22N66FM*		
YAE18N60F BOX	22-16 MAX. INSUL. DIA.: .125" SLEEVE COLOR: RED	4	.21	.92	.73	.24	YAE18N60F	NON-RATCHET: Y10D OR RATCHET: MR8-33T-1 M8ND WITH ONE OF THE FOLLOWING DIES N14HET-25V1 N10ET-9 N14HET-15	YAE18N60FM	TFM WITH DFM10D1 DIE	3/16"
YAE18G43F BOX			.25	.78	.68	.19	YAE18G43F		YAE18G43FM		
YAE18N56F BOX			.28	.83	.76	.23	YAE18N56F		YAE18N56FM		
YAE18N57F BOX		6-8	.31	.96	.78	.29	YAE18N57F		YAE18N57FM		
YAE14N76F BOX	16-14 MAX. INSUL. DIA.: .156" SLEEVE COLOR: BLUE	4-6	.28	.87	.76	.26	YAE14N76F	NON-RATCHET: Y10D OR Y10-22 OR RATCHET: MR8-33T1	YAE14N76FM	TFM WITH DFM9D1 DIE	3/16"
YAE14N77F BOX		6-8	.31	.96	.78	.29	YAE14N77F		YAE14N77FM		
YAE14N78F BOX		8-10	.36	1.01	.83	.34	YAE14N78F		YAE14N78FM		

\* Not UL recognized.