


SRSIN4-E-LED-30-60VAC/DC

- 2 Connections
- With hinged lever



A Phoenix Mecano Brand

Technical Data

Wire sizes		Insulating Material	
Solid min	0.14 mm ²	Material	PA 6.6
Solid max	6.0 mm ²	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.14mm ²	Temperatures	
Stranded (flexible) max	6.0 mm ²	Working Temperature	-40 - 140 °C
Stranded with Ferrule min	0.14 mm ²	Dimensions	
Stranded with Ferrule max	4.0 mm ²	Stripped Length	9.0 mm
Clamping Range min	0.14mm ²	Width	6.1 mm
Clamping Range max	6.0 mm ²	Height	84.0 mm
		Length	58.0 mm
		Height TS35 x 7.5	84.0 mm

Electrical Data


General

Cross Connection Channels	2
Fuse Size	5x20,5x25,5x30
max. Power Loos on Fuse	1.6 W


Electronic Components

Rated Voltage AC	30-60 V
Rated Voltage DC	30-60 V

Colours

 BLACK, similar RAL 9011

Connection Diagram

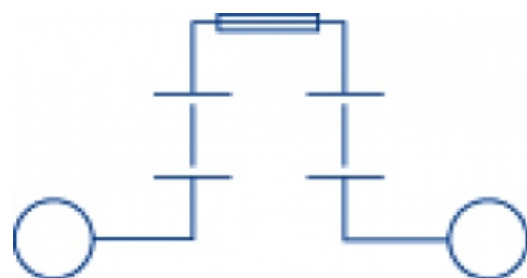

Order Data

Article Designation	Article Number	PU
SRSIN4-E-LED-30-60VAC/DC-BK	417172.4	25

Accessoires

Article Designation	Article Number	PU
End Plate SAP-SRSIN4/6	4917258.4	20
Pick-off Terminal SMAG4/2.5	4917120.2	10
Insulating Cap with Cross-Connector SQIK2.5-10	4917200.8	20
Cross-Connection insulated SQI4/2	4917211.8	50
Cross-Connection insulated SQI4/3	4917212.8	50
Cross-Connection insulated SQI4/5	4917214.8	20
Cross-Connection insulated SQI4/6	4917215.8	20
Cross-Connection insulated SQI4/7	4917216.8	20
Cross-Connection insulated SQI4/8	4917217.8	10
Cross-Connection insulated SQI4/9	4917218.8	10
Cross-Connection insulated SQI4/10	4917219.8	10
Cross-Connection insulated SQI4/30	4917220.8	5
Connecting Sleeve VBS2/10	492873.3	20
Connecting Sleeve VBS3/10	492874.3	20
End Stopn SES	4917250.2	50
Quick Labelling PSB6/50	494702.7	500

Ratings

Ratings	UR	cUR	IEC
Rated Voltage	30-60 V	30-60 V	30-60 V
Rated Current	16 A	16 A	16 A
Rated Wire Size	AWG 22-11	AWG 22-11	4.0 mm ²
Rated Impulse Voltage			6 V
Pollution Degree			3