


Computer Components, Inc.


P/N: 300-075

Sketch: (not to scale)

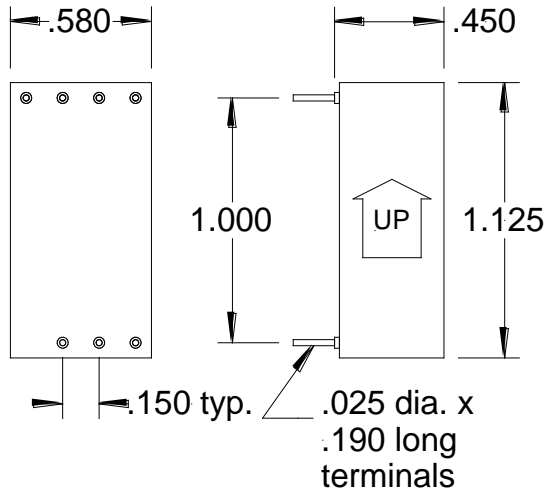

Tolerance: ± .015

Circuit Diagram: (bottom view)

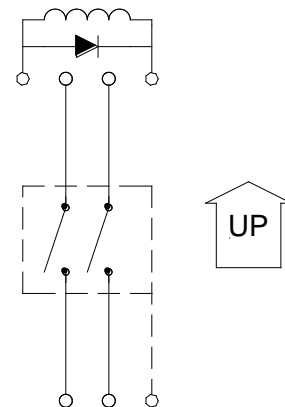

Case:

Metal:
Plastic:
None:

Terminals:

Diameter .025
Length .190
Centers .100 x 1.00

Contact Specifications:

Maximum switching power 28 va/watts
Maximum switching current 1.0 amps ac/dc
Maximum switching voltage 100 volts ac/dc
Breakdown voltage 1000 volts dc

Contact Configuration:

A 2 B C D
Mercury Dry

Other Contact Data:

Electrostatic shield:

Yes: No:

Relay Specifications:

Coil resistance (+/- 10% @20°C) 375 ohms
Nominal coil voltage 12 vdc
Pullin voltage - max. 8.0 vdc
Dropout voltage - min. 1.0 vdc
Dielectric coil/case n/a
coil/cont 1000 vdc
cont/cont 1000 vdc

Other Relay Data:

Life and environmental characteristics
Same as Electrol R2566-2

Magnetic shield: Yes:
No:

Adjustment: Single side stable:
Bi-stable:

Equivalent to: Mfr. Electrol P/N R2566-2

Description: Magnetic Reed Relay - Two pole - Form A - 12 VDC - Mercury wetted contacts
Contains Mercury, Dispose According to Local, State or Federal Laws.

Prepared By: NHN
Revised by: NHN

Date: 3-4-98
Date: 8-9-99

Customer: VARIOUS