


T-73-29



MPY634

Wide Bandwidth PRECISION ANALOG MULTIPLIER

FEATURES

- WIDE BANDWIDTH: 10MHz typ
- ±0.5% MAX FOUR-QUADRANT ERROR
- INTERNAL WIDE-BANDWIDTH OP AMP
- EASY TO USE
- LOW COST
- ENHANCED RELIABILITY SCREENING AVAILABLE

APPLICATIONS


- PRECISION ANALOG SIGNAL PROCESSING
- MODULATION AND DEMODULATION
- VOLTAGE-CONTROLLED AMPLIFIERS
- VIDEO SIGNAL PROCESSING
- VOLTAGE-CONTROLLED FILTERS AND OSCILLATORS

DESCRIPTION

The MPY634 is a wide bandwidth, high accuracy, four-quadrant analog multiplier. Its accurately laser-trimmed multiplier characteristics make it easy to use in a wide variety of applications with a minimum of external parts, often eliminating all external trimming. Its differential X, Y, and Z inputs allow configuration as a multiplier, squarer, divider, square-rooter, and other functions while maintaining high accuracy.

The wide bandwidth of this new design allows signal processing at I.F., R.F., and video frequencies. The internal output amplifier of the MPY634 reduces design complexity compared to other high frequency multipliers and balanced modulator circuits. It is capable of performing frequency mixing, balanced modulation, and demodulation with excellent carrier rejection.

An accurate internal voltage reference provides precise setting of the scale factor. The differential Z input allows user-selected scale factors from 0.1 to 10 using external feedback resistors.

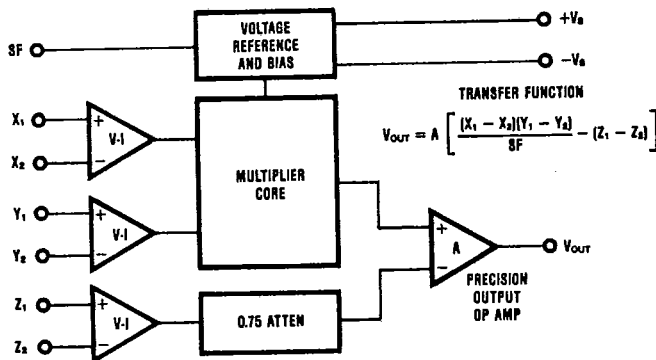

International Airport Industrial Park - P.O. Box 11400 - Tucson, Arizona 85734 - Tel: (602) 746-1111 - Twx: 910-952-1111 - Cable: BBRCORP - Telex: 66-6491

PDS-636B

MPY634

5

ANALOG CIRCUIT FUNCTIONS

SPECIFICATIONS

ELECTRICAL

At $T_A = +25^\circ\text{C}$ and $V_S = \pm 15\text{VDC}$ unless otherwise specified.

MODEL	MPY634KP/KU			MPY634AM			MPY634BM			MPY634SM			UNITS
	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
MULTIPLIER PERFORMANCE													
Transfer Function		*		$(X_1 - X_2)(Y_1 - Y_2) + Z_2$				*			*		
Total Error ⁽¹⁾ ($-10\text{V} \leq X, Y \leq +10\text{V}$)			± 2.0		± 1.5	± 1.0		± 1.0	± 0.5			± 2.0	%
$T_A = \text{min to max}$		± 2.5			± 1.5			± 1.0				± 2.0	%
Total Error vs Temperature		± 0.03			± 0.022			± 0.015				± 0.02	%/°C
Scale Factor Error (SF = 10.000V Nominal) ⁽²⁾		± 0.25			± 0.1			*			*		%
Temperature Coefficient of Scaling Voltage		± 0.02			± 0.01			± 0.01			*		%/°C
Supply Rejection ($\pm 15\text{V} \pm 1\text{V}$)		*			± 0.01			*			*		%
Nonlinearity													
X ($X = 20\text{Vp-p}, Y = 10\text{V}$)		*			± 0.4			0.2	± 0.3		*		%
Y ($Y = 20\text{Vp-p}, X = 10\text{V}$)		*			± 0.01			*	± 0.1		*		%
Feedthrough ⁽³⁾													
X (Y Nulled, $Y = 20\text{Vp-p}, 50\text{Hz}$)		± 0.3			± 0.3			± 0.15	± 0.3		*		%
Y (X Nulled, $Y = 20\text{Vp-p}, 50\text{Hz}$)		*			± 0.01			*	± 0.1		*		%
Both Inputs (500kHz, 1V rms)													
Unnulled	40 ⁽⁴⁾	50		45	55		*	60		*	*		dB
Nulled	55 ⁽⁴⁾	60		55	65		60	70		*	*		dB
Output Offset Voltage		± 50	± 100		± 5	± 30		*	± 15		*	*	mV
Output Offset Voltage Drift		*			± 200			± 100			*	± 500	$\mu\text{V}/^\circ\text{C}$
DYNAMICS													
Small Signal BW, ($V_{\text{OUT}} = 0.1\text{V rms}$)	6 ⁽⁴⁾	*		8	10		*	*		6	*		MHz
1% Amplitude Error ($C_{\text{LOAD}} = 1000\text{pF}$)		*			100			*			*		kHz
Slew Rate ($V_{\text{OUT}} = 20\text{Vp-p}$)		*			20			*			*		V/ μs
Settling Time (to 1%, $\Delta V_{\text{OUT}} = 20\text{V}$)		*			2			*			*		μs
NOISE													
Noise Spectral Density: SF = 10V		*			0.8			*			*		$\mu\text{V}/\sqrt{\text{Hz}}$
Wideband Noise: f = 10Hz to 5MHz		*			1			*			*		mVrms
f = 10Hz to 10kHz		*			90			*			*		μVrms
OUTPUT													
Output Voltage Swing	*	*		± 11			*	*		*	*		V
Output Impedance (f $\leq 1\text{kHz}$)		*			0.1			*			*		Ω
Output Short Circuit Current ($R_L = 0, T_A = \text{min to max}$)		*			30			*			*		mA
Amplifier Open Loop Gain (f = 50Hz)		*			85			*			*		dB
INPUT AMPLIFIERS (X, Y and Z)													
Input Voltage Range													
Differential V_{IN} ($V_{\text{CM}} = 0$)		*			± 12			*			*		V
Common-Mode V_{IN} ($V_{\text{OFF}} = 0$) (see Typical Performance Curves)		*			± 10			*			*		V
Offset Voltage X, Y		± 25	± 100		± 5	± 20		± 2	± 10		*	*	mV
Offset Voltage Drift X, Y		200			100			50			*	*	$\mu\text{V}/^\circ\text{C}$
Offset Voltage Z		± 25	± 100		± 5	± 30		± 2	± 15		*	*	mV
Offset Voltage Drift Z		*			200			100			*	500	$\mu\text{V}/^\circ\text{C}$
CMRR	*	*		60	80		70	90		*	*		dB
Bias Current		*	*		0.8	2.0		*	*		*	*	μA
Offset Current		*	*		0.1			*	*		*	2.0	μA
Differential Resistance		*	*		10			*	*		*	*	M Ω
DIVIDER PERFORMANCE													
Transfer Function ($X_1 > X_2$)		*		$10V \frac{(Z_2 - Z_1)}{(X_1 - X_2)} + Y_1$				*			*		
Total Error ⁽¹⁾ untrimmed ($X = 10\text{V}, -10\text{V} \leq Z \leq +10\text{V}$)		1.5			± 0.75			± 0.35			± 0.75		%
($X = 1\text{V}, -1\text{V} \leq Z \leq +1\text{V}$)		4.0			± 2.0			± 1.0			*		%
($0.1\text{V} \leq X \leq 10\text{V}, -10\text{V} \leq Z \leq 10\text{V}$)		5.0			± 2.5			± 1.0			*		%

ELECTRICAL (CONT)

At $T_a = +25^\circ\text{C}$ and $V_s = \pm 15\text{VDC}$ unless otherwise specified.

MODEL	MPY634KP/KU			MPY634AM			MPY634BM			MPY634SM			UNITS
	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
SQUARE PERFORMANCE Transfer Function Total Error ($-10\text{V} \leq X \leq 10\text{V}$)		*			$\frac{(X_1 - X_2)^2}{10\text{V}} + Z_2$			*			*		%
SQUARE-ROOTER PERFORMANCE Transfer Function ($Z_1 \leq Z_2$) Total Error ⁽¹⁾ ($1\text{V} \leq Z \leq 10\text{V}$)		*			$\sqrt{10\text{V}(Z_2 - Z_1)} + X_2$			*			*		%
POWER SUPPLY Supply Voltage: Rated Performance Operating Supply Current, Quiescent	*	*	*	± 8	± 15	± 18	*	*	*	*	*	± 20	VDC VDC mA
TEMPERATURE RANGE Specification Storage	⁽⁵⁾ -40		⁽⁵⁾ +85	-25 -65		+85 +150	*		*	-55		+125	$^\circ\text{C}$ $^\circ\text{C}$

*Specification same as for MPY634AM.

NOTES: (1) Figures given are percent of full scale, $\pm 10\text{V}$ (i.e., 0.01% = 1mV). (2) May be reduced to 3V using external resistor between $-V_s$ and SF. (3) Irreducible component due to nonlinearity; excludes effect of offsets. (4) KP grade only. (5) KP grade only. 0 $^\circ\text{C}$ to +70 $^\circ\text{C}$ for KU grade.

MPY634

MECHANICAL

PLASTIC DUAL-IN-LINE

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.660	.765	16.76	19.94
B	.220	.260	5.59	7.11
C	—	.200	—	5.08
D	.015	.023	0.38	0.58
F	.030	.070	0.76	1.78
G	.100 BASIC		2.54 BASIC	
H	.030	.095	—	—
J	.008	.015	0.20	0.38
K	.100		2.54	
L	.300 BASIC		7.62 BASIC	
M	—		15*	
N	.020	.050	0.51	1.27

NOTE: Leads in true position within 0.010" (0.25mm) R at MMC at seating plane.

METAL TO-100

NOTE: Leads in true position within 0.01" (0.25mm) R at MMC at seating plane.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.335	.370	8.51	9.40
B	.305	.335	7.75	8.51
C	.165	.185	4.19	4.70
D	.016	.021	0.41	0.53
E	.010	.040	0.25	1.02
F	.010	.040	0.25	1.02
G	.230 BASIC		5.84 BASIC	
H	.028	.034	0.71	0.86
J	.029	.045	0.74	1.14
K	.500		12.70	
L	.120	.160	3.05	4.08
M	36° BASIC		36° BASIC	
N	.110	.120	2.79	3.05

5

ANALOG CIRCUIT FUNCTIONS

SMALL OUTLINE SURFACE MOUNT

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.400	.418	10.16	10.57
A ₁	.388	.412	9.86	10.48
B	.288	.302	7.26	7.67
B ₁	.268	.286	6.81	7.28
C	.093	.109	2.36	2.77
D	.015	.020	0.38	0.51
G	.050 BASIC		1.27 BASIC	
H	.022	.038	0.56	0.97
J	.008	.012	0.20	0.30
L	.391	.421	9.93	10.69
M	5° TYP		5° TYP	
N	.000	.012	0.00	0.30

NOTE: Leads in true position within 0.010" (0.25mm) R at MMC at seating plane.

ABSOLUTE MAXIMUM RATINGS

Parameter	MPY634AM/BM	MPY634KP/KU	MPY634SM
Power Supply Voltage	± 18	*	± 20
Power Dissipation	500mW	*	*
Output Short-Circuit to Ground	Indefinite	*	*
Input Voltage (all X, Y and Z)	$\pm V_s$	*	*
Temperature Range:			
Operating	-25/+85 $^\circ\text{C}$	*	-55/+125 $^\circ\text{C}$
Storage	-65/+150 $^\circ\text{C}$	-40/+85 $^\circ\text{C}$	*
Lead Temperature (10s soldering)	+300 $^\circ\text{C}$	*	*
SOIC 'KU' Package		+260 $^\circ\text{C}$	*

* Specification same as for MPY634AM/BM.

PRICES

Qty.	MPY634KP	MPY634AM	MPY634BM	MPY634SM	MPY-634SM/QM	MPY634KU
1-24	\$14.39	\$18.65	\$27.72	\$68.81	—	\$16.50
25-99	11.50	14.96	22.19	53.84	78.10	13.25
100+	8.35	10.45	16.01	39.74	57.60	9.60

ORDERING INFORMATION

Basic Model Number MPY634 () () (/QM)

Performance Grade _____

K: -25°C to +85°C ('U' package 0°C to +70°C)⁽¹⁾

A: -25°C to +85°C

B: -25°C to +85°C

S: -55°C to +125°C

Package Code _____

M: TO-100 metal


P: Plastic 14-pin DIP

U: 16-pin SOIC

Enhanced reliability screening (/QM option) available on MPY634SM. Contact your Burr-Brown representative for information.





NOTE: (1) Performance grade identifier may not be marked. Blank denotes "K" grade.

PIN CONFIGURATIONS (TOP VIEW)

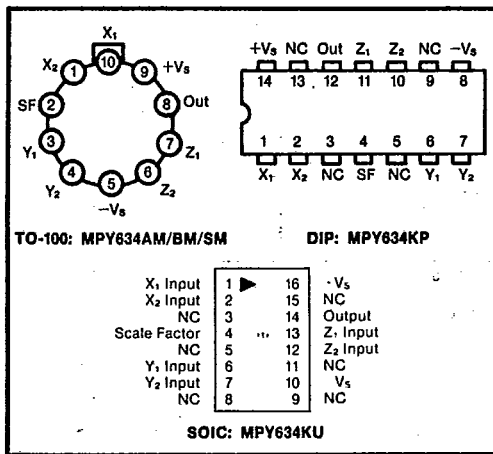





TYPICAL PERFORMANCE CURVES

T_A = +25°C, V_s = ±15VDC unless otherwise noted.

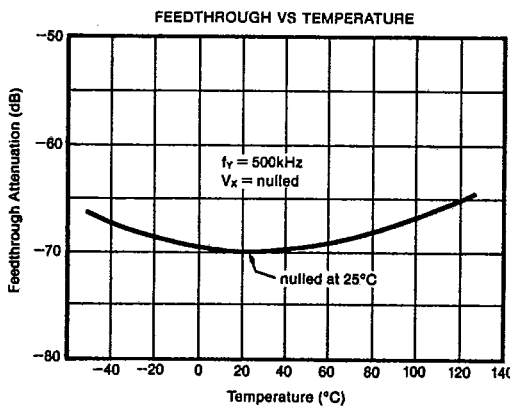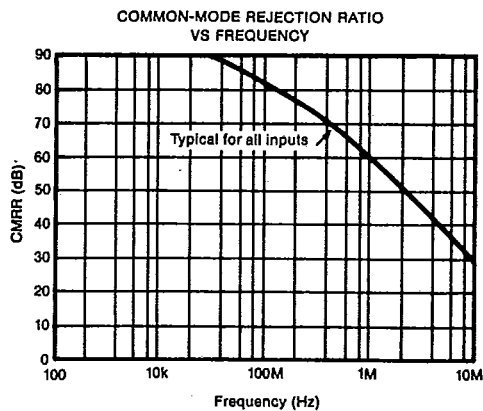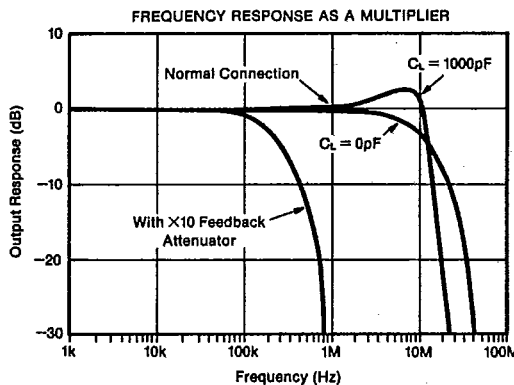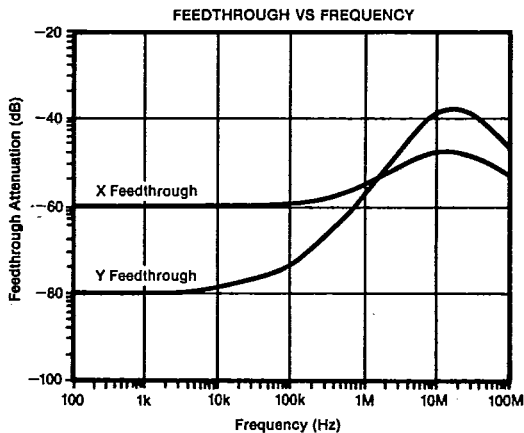

TYPICAL PERFORMANCE CURVES (CONT)

T_A = +25°C, V_S = ±15VDC unless otherwise noted.

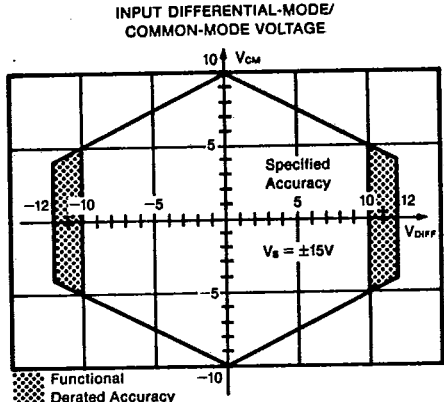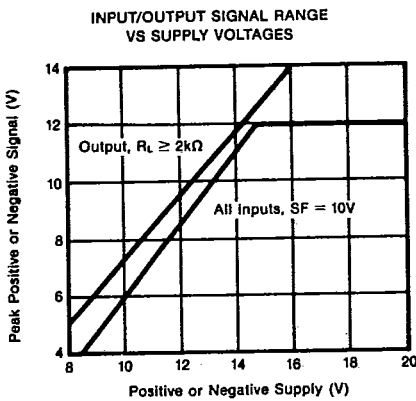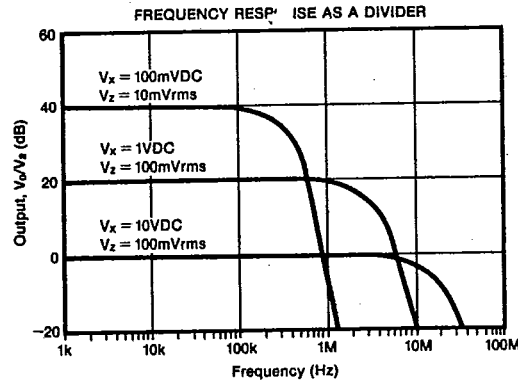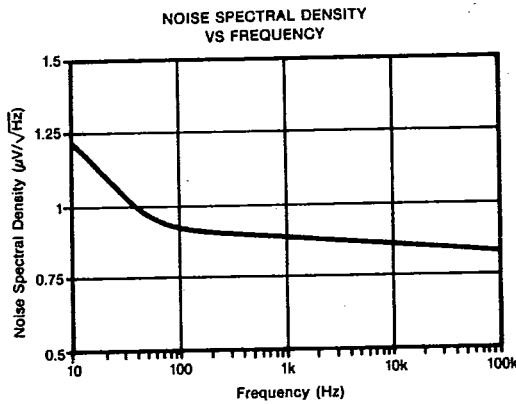


THEORY OF OPERATION

The transfer function for the MPY634 is:

$$V_{OUT} = A \left[\frac{(X_1 - X_2)(Y_1 - Y_2)}{SF} - (Z_1 - Z_2) \right]$$

- where:
- A = open-loop gain of the output amplifier (typically 85dB at DC).
- SF = Scale Factor. Laser-trimmed to 10V but adjustable over a 3V to 10V range using external resistors.
- X, Y, Z are input voltages. Full-scale input voltage is equal to the selected SF. (Max input voltage = ±1.25 SF.)

An intuitive understanding of transfer function can be gained by analogy to the op amp. By assuming that the open-loop gain, A, of the output operational amplifier is infinite, inspection of the transfer function reveals that any V_{our} can be created with an infinitesimally small quantity within the brackets. Then, an application circuit can be analyzed by assigning circuit voltages for all X, Y and Z inputs and setting the bracketed quantity equal to zero. For example, the basic multiplier connection in Figure 1, Z₁ = V_{our} and Z₂ = 0. The quantity within the brackets then reduces to:

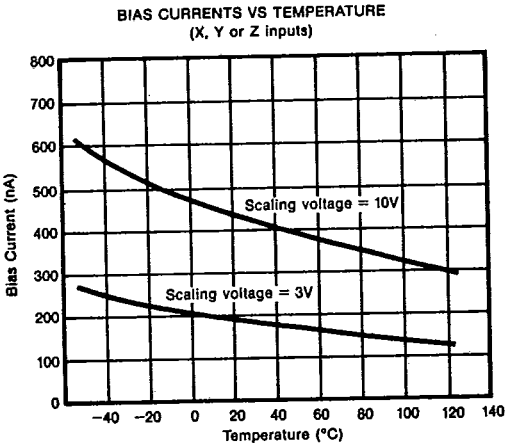

MPY634

5

ANALOG CIRCUIT FUNCTIONS

$$\frac{(X_1 - X_2)(Y_1 - Y_2)}{SF} - (V_{OUT} - 0) = 0$$

This approach leads to a simple relationship which can be solved for V_{OUT} to provide the closed-loop transfer function.

The scale factor is accurately factory adjusted to 10V and is typically accurate to within 0.1% or less. The scale factor may be adjusted by connecting a resistor or potentiometer between pin SF and the $-V_S$ power supply. The value of the external resistor can be approximated by:

$$R_{SF} = 5.4k\Omega \left[\frac{SF}{10 - SF} \right]$$

Internal device tolerances make this relationship accurate to within approximately 25%. Some applications can benefit from reduction of the SF by this technique. The reduced input bias current, noise, and drift achieved by this technique can be likened to operating the input circuitry in a higher gain, thus reducing output contributions to these effects. Adjustment of the scale factor does not affect bandwidth.

The MPY634 is fully characterized at $V_S = \pm 15V$ but operation is possible down to $\pm 8V$ with an attendant reduction of input and output range capability. Operation at voltages greater than $\pm 15V$ allows greater output swing to be achieved by using an output feedback attenuator (Figure 1).

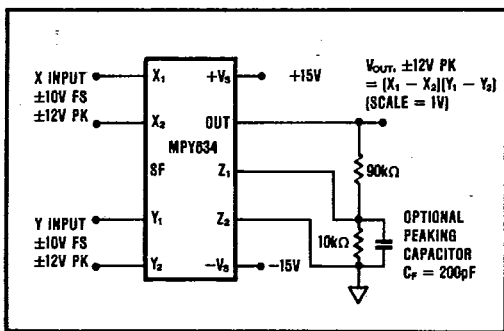


FIGURE 1. Connections for Scale-Factor of Unity.

As with any wide bandwidth circuit, the power supplies should be bypassed with high frequency ceramic capacitors. These capacitors should be located as near as practical to the power supply connections of the MPY634. Improper bypassing can lead to instability, overshoot, and ringing in the output.

BASIC MULTIPLIER CONNECTION

Figure 2 shows the basic connection as a multiplier. Accuracy is fully specified without any additional user-trimming circuitry. Some applications can benefit from trimming of one or more of the inputs. The fully differential inputs facilitate referencing the input quantities to the source voltage common terminal for maximum accuracy. They also allow use of simple offset voltage trimming circuitry as shown on the X input.

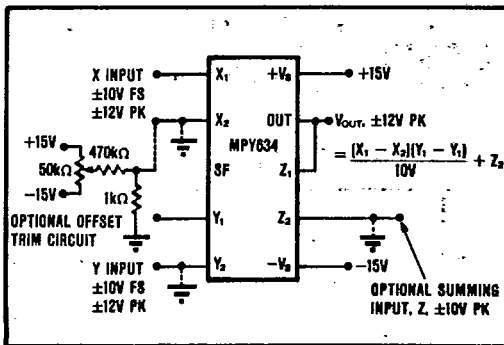


FIGURE 2. Basic Multiplier Connection.

The differential Z input allows an offset to be summed in V_{OUT} . In basic multiplier operation the Z_2 input serves as the output voltage ground reference and should be connected to the ground of the driven system for maximum accuracy.

A method of changing (lowering) SF by connecting to the SF pin was discussed previously. Figure 1 shows an alternative method of changing the effective SF of the overall circuit by using an attenuator in the feedback connection to Z_1 . This method puts the output amplifier in a higher gain and is thus accompanied by a reduction in bandwidth and an increase in output offset voltage. The larger output offset may be reduced by applying a trimming voltage to the high impedance input, Z_2 .

The flexibility of the differential Z inputs allows direct conversion of the output quantity to a current. Figure 3 shows the output voltage differentially-sensed across a series resistor forcing an output-controlled current. Addition of a capacitor load then creates a time integration function useful in a variety of applications such as power computation.

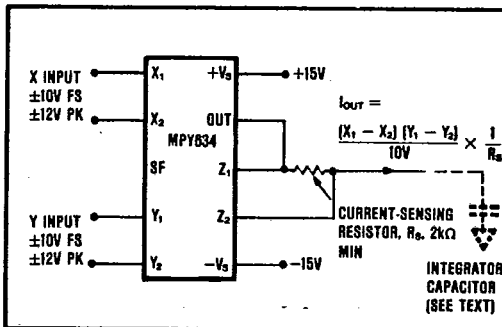


FIGURE 3. Conversion of Output to Current.

SQUARER CIRCUIT (FREQUENCY DOUBLER)

Squarer, or frequency doubler, operation is achieved by paralleling the X and Y inputs of the standard multiplier circuit. Inverted output can be achieved by reversing the differential input terminals of either the X or Y input. Accuracy in the squaring mode is typically a factor of

two better than the specified multiplier mode with maximum error occurring with small (less than 1V) inputs. Better accuracy can be achieved for small input voltage levels by reducing the scale factor, SF.

DIVIDER OPERATION

The MPY634 can be configured as a divider as shown in Figure 4. High impedance differential inputs for the numerator and denominator are achieved at the Z and X inputs respectively. Feedback is applied to the Y₂ input, and Y₁ is normally referenced to output ground. Alternatively, as the transfer function implies, an input applied to Y₁ can be summed directly into V_{out}. Since the feedback connection is made to a multiplying input, the effective gain of the output op amp varies as a function of the denominator input voltage. Therefore, the bandwidth of the divider function is proportional to the denominator voltage (see Typical Performance Curves).

Accuracy of the divider mode typically ranges from 1.0% to 2.5% for a 10 to 1 denominator range depending on device grade. Accuracy is primarily limited by input offset voltages and can be significantly improved by trimming the offset of the X input. A trim voltage of

±3.5mV applied to the "low side" X input (X₂ for positive input voltages on X₁) can produce similar accuracies over a 100 to 1 denominator range. To trim, apply a signal which varies from 100mV to 10V at a low frequency (less than 500Hz). An offset sine wave or ramp is suitable. Since the ratio of the quantities should be constant, the ideal output would be a constant 10V. Using AC coupling on an oscilloscope, adjust the offset control for minimum output voltage variation.

SQUARE-ROOTER

A square-rooter connection is shown in Figure 5. Input voltage is limited to one polarity (positive for the connection shown). The diode prevents circuit latch-up should the input go negative. The circuit can be configured for negative input and positive output by reversing the polarity of both the X and Y inputs. The output polarity can be reversed by reversing the diode and X input polarity. A load resistance of approximately 10kΩ must be provided. Trimming for improved accuracy would be accomplished at the Z input.

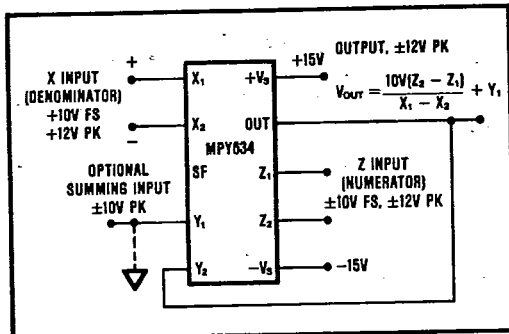


FIGURE 4. Basic Divider Connection.


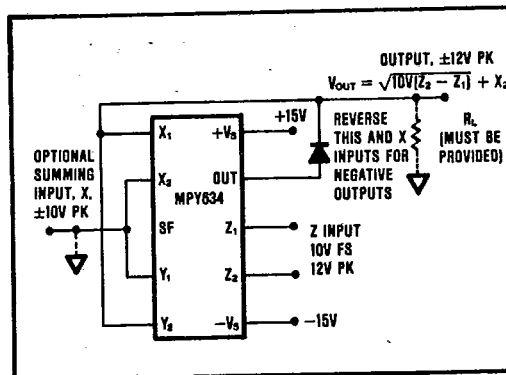



FIGURE 5. Square-Rooter Connection.

APPLICATIONS

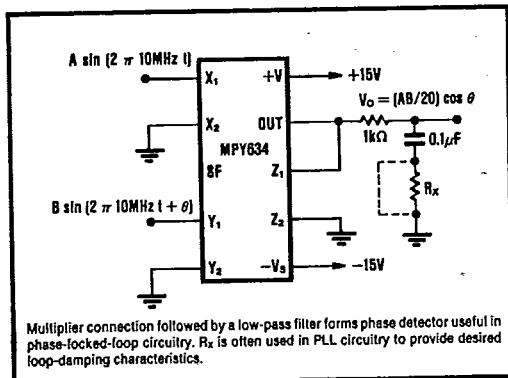

Multiplier connection followed by a low-pass filter forms phase detector useful in phase-locked-loop circuitry. R_x is often used in PLL circuitry to provide desired loop-damping characteristics.

FIGURE 6. Phase Detector.

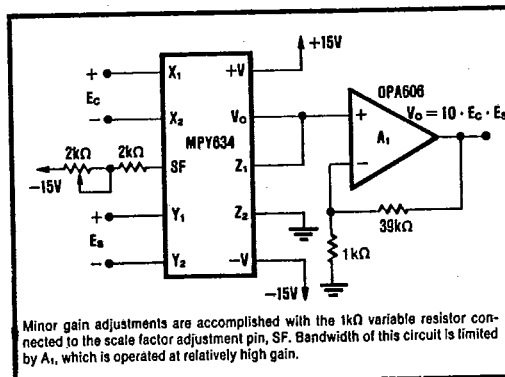

Minor gain adjustments are accomplished with the 1kΩ variable resistor connected to the scale factor adjustment pin, SF. Bandwidth of this circuit is limited by A₁, which is operated at relatively high gain.

FIGURE 7. Voltage-Controlled Amplifier.

MPY634

5

ANALOG CIRCUIT FUNCTIONS

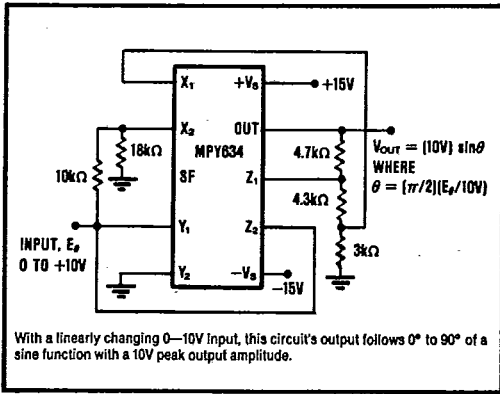


FIGURE 8. Sine-Function Generator.



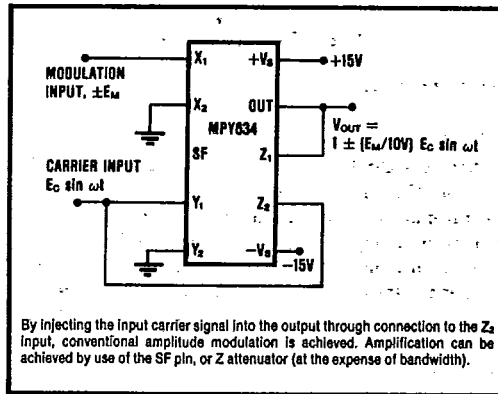




FIGURE 9. Linear AM Modulator.

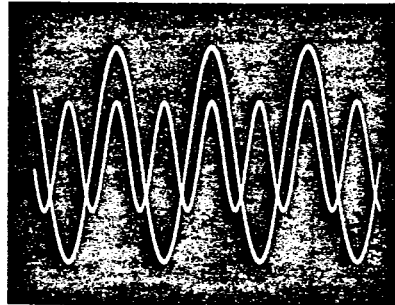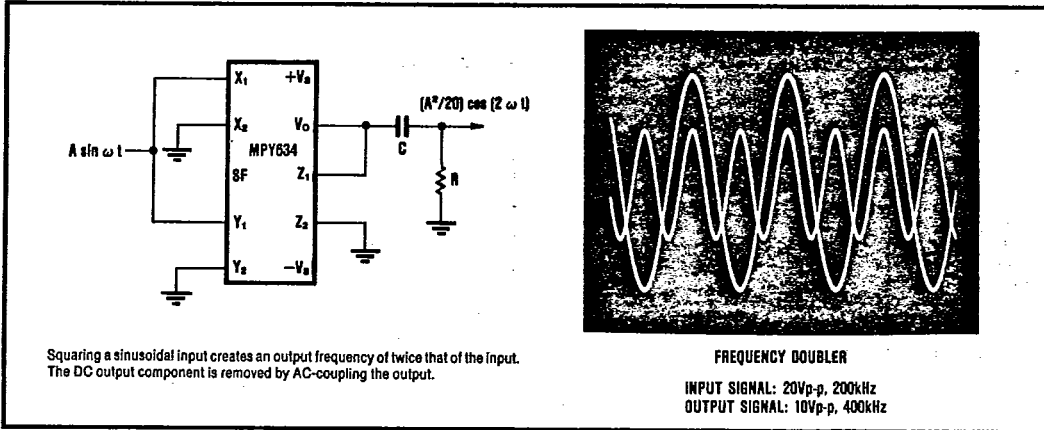

FREQUENCY DOUBLER

INPUT SIGNAL: 20Vp-p, 200kHz
OUTPUT SIGNAL: 10Vp-p, 400kHz

FIGURE 10. Frequency Doubler.

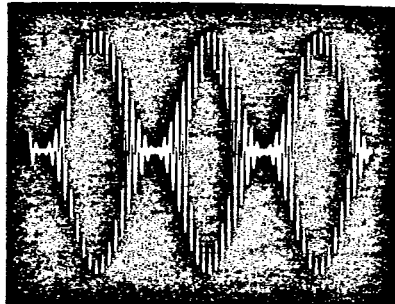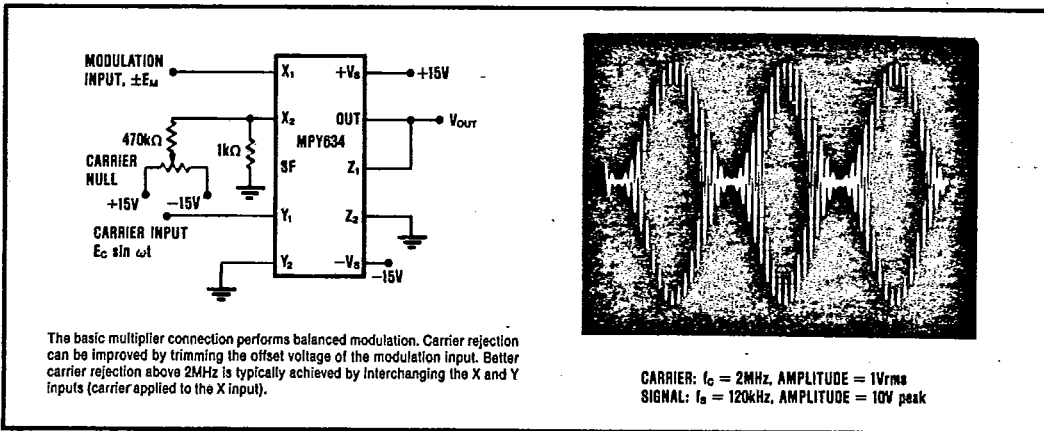

CARRIER: $f_c = 2\text{MHz}$, AMPLITUDE = 1Vrms
SIGNAL: $f_m = 120\text{kHz}$, AMPLITUDE = 10V peak

FIGURE 11. Balanced Modulator.