REV	DESCRIPTION	BY DATE	APPD
E	REVISED PER ER040866	BB 03/15/12	CY

NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SDPRF-206.

2. MATERIAL SPECIFICATIONS:
   BAYONET SLEEVE, BODY, CONTACT, FERRULE: BRASS PER ASTM B16
   INSULATOR: TEFLON PER ASTM D1710
   SPRING WASHER, OUTER CONTACT: BERYLLIUM COPPER, ASTM-B-194
   GASKET: SILICONE RUBBER

3. FINISH SPECIFICATIONS:
   BAYONET SLEEVE, BODY, FERRULE: .000100MIN NICKEL PER AMS-QQ-N-290
   OVER COPPER FLASH PER ASTM B734 (ROHS)
   CONTACT: .000030 MIN. GOLD PER ASTM B488, OVER NICKEL PER AMS-QQ-N-290 (ROHS)
   ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N-290
   OVER .000050 MIN COPPER PER ASTM-B734

4. CONTACT AND FERRULE SHIPPED LOOSE.

5. FOR USE WITH TACHII CABLE TCX-5CFBL OR EQUIVALENT.

6. FOR CRIMPING USE KINGS KTH-5000 & KTH-5006 (.32 HEX, .054 SQUARE FLAT).

7. ASSEMBLE TO CABLE USING CAP-E01.

8. THESE AREA HAVE WHITE MARKING.

9. ELECTRIC SPECIFICATIONS:
   IMPEDANCE: 75 OHMS
   FREQUENCY RANGE: DC TO 3 GHz
   RETURN LOSS: 25 dB MIN (DC TO 3 GHz)

P/N	DESCRIPTION	QTY
2065-E00-5CF01N	SINGLE PACK	1
2065-E00-5CF01NU	BULK PACK	100

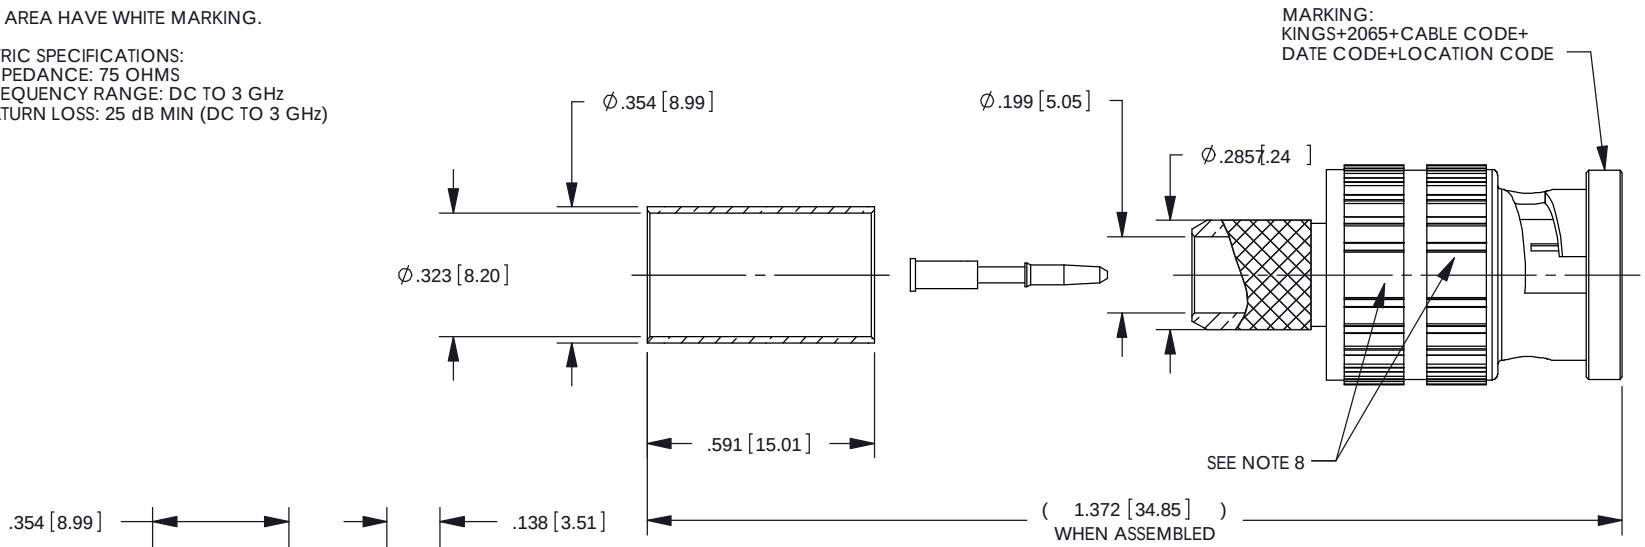

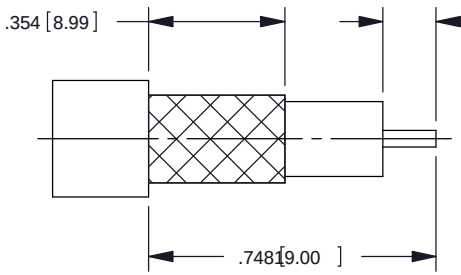

RECOMMENDED CABLE
TRIMMING DIMENSIONS

CATALOG P/N:2065-E00-5CF01N

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMAL: .XX [X.X] ± .01 [0.3]
.XXX [X.XX] ± .005 [0.13]
.XXXX [X.XXX] ± .0005
ANGLES: ± 2° SCALE: 2:1

CUSTOMER DRAWING

DRAWN	DATE	APPROVED	DATE
CY	03/10/08	RFA	03/11/08
APPROVED	DATE	APPROVED	DATE
DCT	03/11/08	DCam	03/11/08

WinchesterElectronics
KINGS®
Winchester Electronics Corporation
62 Barnes Industrial Road North
Wallingford, Connecticut 06492

BNC 75 PLUG
FOR TACHII TCX-5CFBL
(ROHS COMPLIANT)

A	SD2065-E00-5CF01N	SHT 1 OF 1	REV E