


CERAMIC PACKAGE AT CUT SURFACE MOUNT CRYSTALS

MODEL SM2
MODEL S2A




Model	SM2 / S2A
Frequency	12.0MHz~100.0 MHz
Oscillation Mode	12.0~30.0 MHz (Fund) 30.0~60.0 MHz (3rd) 60.0~100.0 MHz (5th)
Frequency Tolerance @25°C	± 50ppm Optional Tolerances Available
Temperature Stability	± 50ppm 0°C~ +70°C Standard, Extended Temperature Ranges Available
Storage Temperature Range	-55°C~ +125°C
Equivalent Series Resistance	Resistance Specifications Below (See Chart Below)
Shunt Capacitance	7pF Max
Load Capacitance	Series resonance, 16pF, 20pF, 30pF
Drive level	10~100μW (100μW Correlation)
Aging for first year	± 5ppm Max
Reflow Soldering Condition	10 Seconds Max at +235°C ± 5°C

DIMENSIONS Inches (mm)


SM2



Connections (Top View)

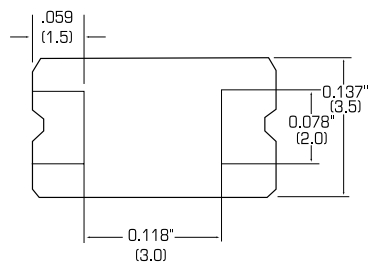


Land pattern (example)



S2A






Connections (Top View)





Pin Connection

#1, #3: X'tal #2, #4: NC

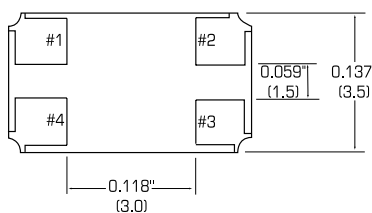

Land pattern (example)

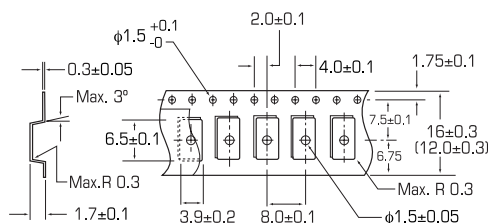

1,000 pcs. per reel
(178mm dia.)

Frequency	Equivalent Series Resistance	Oscillation Mode
12.0 ~ 16.0MHz	80Ω Max	Fundamental
16.0 ~ 20.0MHz	60Ω Max	Fundamental
20.0 ~ 50.0MHz	40Ω Max	Fundamental
50.0 ~ 100.0MHz	100Ω Max	3rd Overtone