


Straight Flange Mount Female Jack Receptacle - 4 Hole *

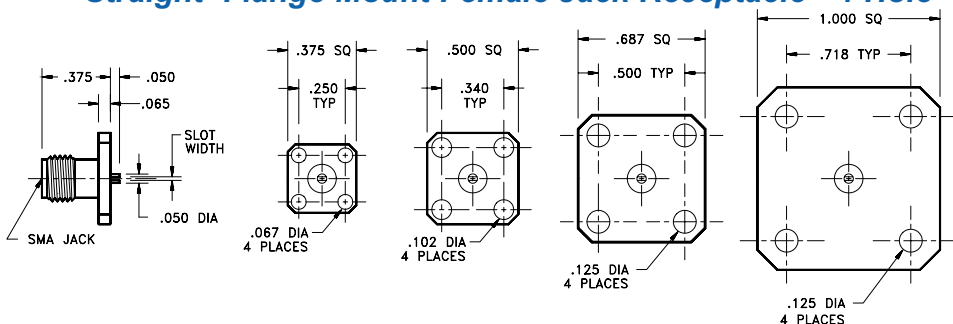

* For two hole version, change the 5th digit of Model No. to "2". Slots are horizontal, for vertical slot, increment 7th digit by 5. Ex: SMA-5225-15-SLT-02.


** For non-captive center contact, change 4th digit of Model No. from "5" to "6". Example: SMA-6320-15-SLT-02

Captured Center Contact **

Model Number	Slot Width Inches (mm)	Flange Size Square Inches (mm)	Model Number	Slot Width Inches (mm)	Flange Size Square Inches (mm)
SMA-5320-15-SLT-02	.012 (0.3)	.375 (9.5)	SMA-5620-15-SLT-02	.012 (0.3)	.687 (17.5)
SMA-5321-15-SLT-02	.018 (0.5)		SMA-5621-15-SLT-02	.018 (0.5)	
SMA-5322-15-SLT-02	.028 (0.7)		SMA-5622-15-SLT-02	.028 (0.7)	
SMA-5323-15-SLT-02	.036 (0.9)		SMA-5623-15-SLT-02	.036 (0.9)	
SMA-5520-15-SLT-02*	.012 (0.3)	.500 (12.7) * Two Hole Version is .625 x .223	SMA-5120-15-SLT-02	.012 (0.3)	1.000 (25.4)
SMA-5521-15-SLT-02*	.018 (0.5)		SMA-5121-15-SLT-02	.018 (0.5)	
SMA-5522-15-SLT-02*	.028 (0.7)		SMA-5122-15-SLT-02	.028 (0.7)	
SMA-5523-15-SLT-02*	.036 (0.9)		SMA-5123-15-SLT-02	.036 (0.9)	

Note: Standard finish is passivated stainless steel, for gold plating change -02 suffix to -00.

Straight Flange Mount Male Plug Receptacle - 4 Hole *

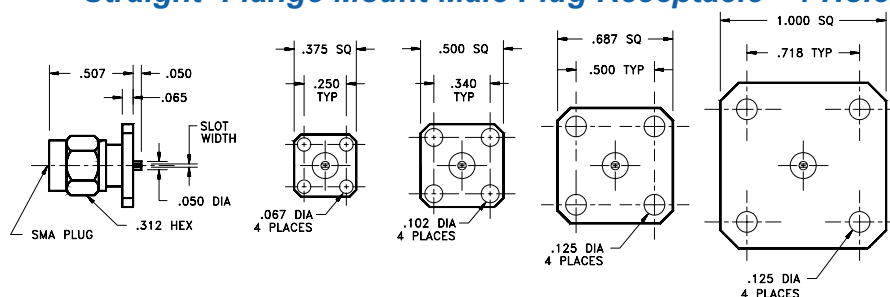

* For two hole version, change the 5th digit of Model No. to "2". Slots are horizontal, for vertical slot, increment 7th digit by 5. Ex: SMA-5225-14-SLT-02.

** For non-captive center contact, change 4th digit of Model No. from "5" to "6". Example: SMA-6320-14-SLT-02.

Captured Center Contact **

Model Number	Slot Width Inches (mm)	Flange Size Square Inches (mm)	Model Number	Slot Width Inches (mm)	Flange Size Square Inches (mm)
SMA-5320-14-SLT-02	.012 (0.3)	.375 (9.5)	SMA-5620-14-SLT-02	.012 (0.3)	.687 (17.5)
SMA-5321-14-SLT-02	.018 (0.5)		SMA-5621-14-SLT-02	.018 (0.5)	
SMA-5322-14-SLT-02	.028 (0.7)		SMA-5622-14-SLT-02	.028 (0.7)	
SMA-5323-14-SLT-02	.036 (0.9)		SMA-5623-14-SLT-02	.036 (0.9)	
SMA-5520-14-SLT-02*	.012 (0.3)	.500 (12.7) * Two Hole Version is .625 x .223	SMA-5120-14-SLT-02	.012 (0.3)	1.000 (25.4)
SMA-5521-14-SLT-02*	.018 (0.5)		SMA-5121-14-SLT-02	.018 (0.5)	
SMA-5522-14-SLT-02*	.028 (0.7)		SMA-5122-14-SLT-02	.028 (0.7)	
SMA-5523-14-SLT-02*	.036 (0.9)		SMA-5123-14-SLT-02	.036 (0.9)	

Note: Standard finish is passivated stainless steel, for gold plating change -02 suffix to -00.