

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes




ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	5.87 ohms max.
INDUCTANCE	1-3 100kHz, 100mVAC, Ls	2.0mH min.
DIELECTRIC	8-1 625VAC, 1 second	500VAC, 1 minute
URNS RATIO	(1-3):(8-7)	100:1, ±1%





GENERAL SPECIFICATIONS:
CURRENT RATING: 10A max.

Ⓢ UL recognized class B insulation system M1-130(B), E106391.



Ⓢ


TERM. NO.'s FOR REF. ONLY

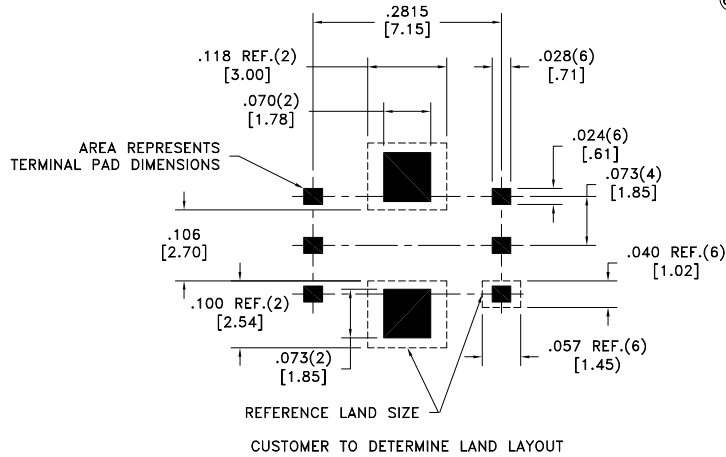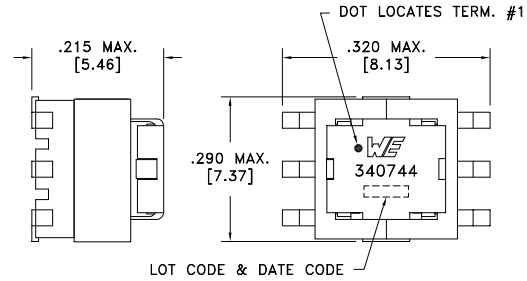

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications
		Method: Tape & Reel
		PKG-0215
		www.we-online.com/midcom
6B	3/18	
6A	11/12	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:
Angles: ±1°
Decimals: ±.005 [.13]
Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE	PART NO.
TRANSFORMER	750340744
eiSos p/n: 750340744	SPECIFICATION SHEET 1 OF 1

