



ADSL-Transformer WSL-A32.336

Specifications



Schematics & Mechanicals (mm)



BLACK DOT IS PIN NO.1

Application

CO, Motorola MC03AX1456RT Rev. 1.3 Chipset

Safety Agency

IEC 950

Features

Optimized magnetic shielding for low interference
High performance, high quality design
SMT and THT package available

WebLinks

Data Sheet

www.wickmann.com/products/WSL_A32336.pdf

Packaging

www.wickmann.com/pack

Packaging

100 pcs./tray
7 trays/carton

Solderability

270 - 300°C


Isolation voltage

1875 VAC

Operation Temperature Range



-40°C to +85°C

Marking

 article-no.

Unit Weight

7g

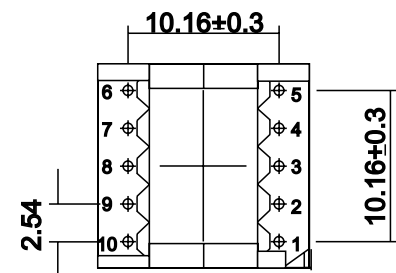

DC Resistance:	2,4 Ω (1-4) max. ±10%
	2,4 Ω (2-5) max. ±10%
	1,8 Ω (9-7) max. ±10%
	2,25 Ω (10-6) max. ±10%
Open Circuit Inductance:	3,96mH ±5% @ 10kHz, 100mVAC (1-5), short (2+4)
Turns Ratio:	1,2:1 ±1% (1-5):(9-6), short (2+4, 7+10)
Leakage Inductance:	18,0μH max. 100kHz, 100mVAC (1-5), short (2+4, 7+10, 6+9)
Longitudinal Balance:	-
Interwinding Capacity:	-
Reflects 100Ω @ R _L =	-
Insertion Loss:	-
Total Harmonic Distortion (THD):	-

Order Information

Qty.	Order Number
	960 4 632336 9