
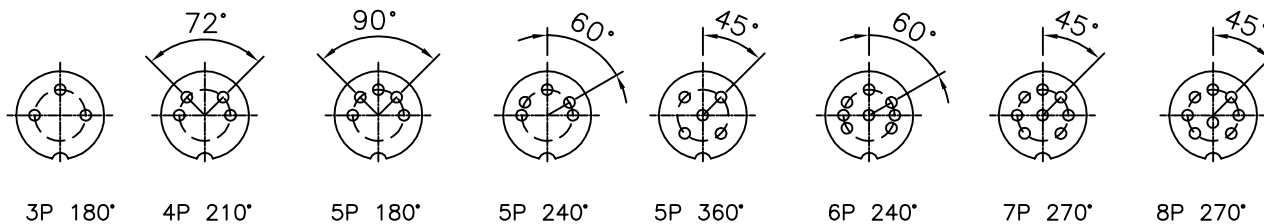
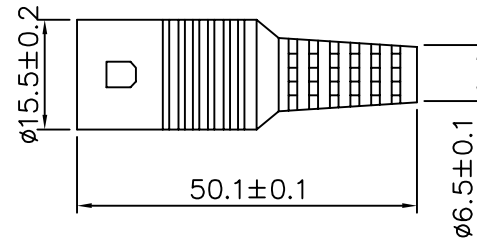


**SPECIFICATIONS**

Rating : 12V DC 1A Max.  
 Dielectric Strength : 250V AC/1 Min.  
 Insulation Resistance : 50Megohms Min.At 250V DC  
 Plug Body : ABS Plastic  
 Pin : Copper Nickel Plated  
 Shield : Stainless Nickel Plated  
 Boot : EVA Plastic



**AUK** A NUMBER OF AUK GROUP  
**太聯事業股份有限公司**  
 AUK CONTRACTORS CO., LTD.

DRAWING No.  
 DA06P-GE

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE

REV. A

UNIT mm

AREA REVISIONS CHK DATE