



**VERY LOW INTERMODULATION CABLE ASSEMBLIES (-125 dBm typ.) (-165 dBc typ./20W)**

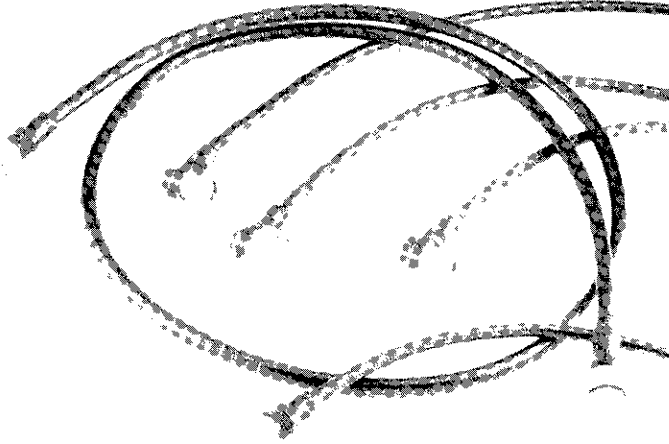


### HOW TO ORDER

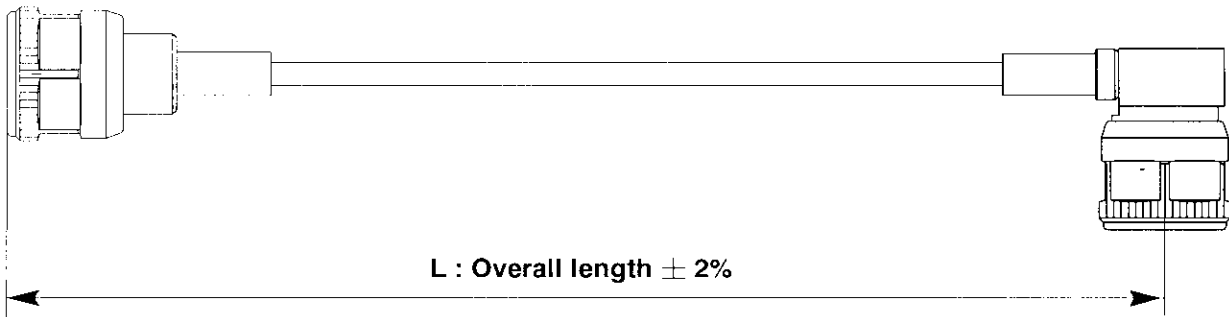

Example : Straight plug N / Cable 1/4" high flexible Cellflex / right angle plug N / length 50 cm

**865 48 030 / C291 993 170 / 865 48 040 / 50**

Connector 1 part number (see table 1)	_____
Coax cable part number (see table 2 page 39)	_____
Connector 2 part number (see table 1)	_____
Overall length in cm	_____



## VERY LOW INTERMODULATION CABLE ASSEMBLIES (-125 dBm typ.) (-165 dBc typ./20W)

Connectors part number guide

SERIES	MODEL Solder Type	SPIRALED			SEMI RIGID .141"	(PTFE) FLEXIBLE	
		1/4"	3/8"	1/2"		RG 400	RG 393
N	Straight plug	865 48 030	865 48 080	865 48 120	865 48 000	Please consult us	
	R/A plug	865 48 040	865 48 090	865 48 130	865 48 010		
	Straight jack	865 48 050	865 48 100	865 48 140			
	Straight panel sealed bulkhead jack	865 48 060	865 48 110	865 48 150	865 48 020		
	Straight flange mount jack	865 48 070	865 48 170	865 48 160			

These connectors are only available for cable assemblies made by Radiall.

Cable assemblies with standard lengths

CONNECTOR 1		CABLE		CONNECTOR 2		Cable assembly P / N	Fig
SERIES	Model	Type	Length (m)	Series	Model		
N	Straight plug	3/8" spiraled	1.5	N	Straight plug	R285 780 063	1
		1/2" spiraled			R285 780 083		
	R/A plug	3/8" spiraled	R/A plug		R285 783 063	2	
	Straight plug	1.5	3/8" spiraled		Straight bulkhead jack	R285 786 063	3
						Straight plug	R285 720 063
					R/A plug	1/2" spiraled	Straight flange jack
1/2" spiraled				R285 725 063			
R/A plug	1/4" spiraled	1	7/16	R285 725 083	6		
					R285 724 042		

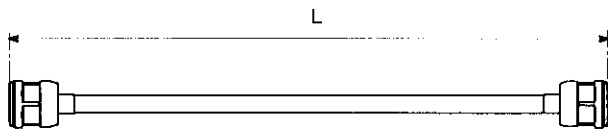


Fig 1




Fig 4




Fig 2




Fig 5

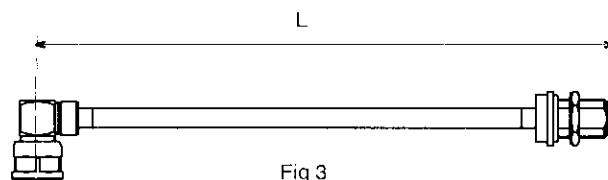


Fig 3




Fig 6