


Dialight

CANADIAN
HAND and WALKING PERSON
PEDESTRIAN SIGNALS

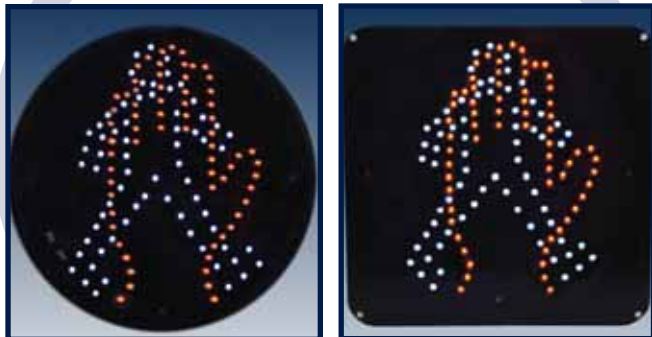

FEATURES / BENEFITS

- ▲ 90% reduction in power vs. incandescent
- ▲ Long life; up to 10 times longer than incandescent
- ▲ Sealed moisture resistant enclosure
- ▲ Lens available to fit most pedestrian heads
- ▲ Lens has a textured surface to reduce glare
- ▲ Wide selection of products
- ▲ Easy to install into existing signal enclosure

SPECIFICATIONS

- ▲ Operating Voltage Range: 80VAC to 135VAC (120VAC nominal)
- ▲ Fuse and transient suppressor incorporated for line and load protection
- ▲ Operating Temperature Range: -40°C to +74°C
- ▲ Turn-On/Turn-Off Time = 75 msec max
- ▲ Power factor >0.9
- ▲ Total harmonic distortion <20%
- ▲ Meets FCC Title 47, Subpart B, Section 15 Regulations for electrical noise
- ▲ Provided with quick connect terminals and Spade adapters
- ▲ Written manufacturer's warranty available on request
- ▲ All products traceable by serial number
- ▲ LED Colors:
 - Hand - Portland Orange
 - Walking Person - Lunar White

TYPICAL OPERATING CHARACTERISTICS

Part Number	Housing Size	SYMBOL		WATTAGE		CSA Approved*
		Hand	Person	Hand	Person	
SINGLE						
430-5772-001	12" x 12"	Outline		6		
430-7772-001	12" x 12"		Outline		6	
430-7777-001	12" Round		Outline		6	
434-5270-001	12" Round	Outline		6		
OVERLAY						
430-6477-001	16" x 18"	Outline	Outline	6	6	
430-6775-001	12" Round	Outline	Outline	6	6	●
430-6776-001	12" x 12"	Outline	Outline	6	6	●
SIDE-BY-SIDE						
430-6777-001	16" x 18"	Outline	Outline	6	6	●

*CSA approval is to Std. 250 for Luminaires

Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDTSCANHWP001_B