


SPECIFICATION:

Contact Current Rating : 1 Amperes
 Dielectric Withstanding Voltage : AC 500V R.M.S
 Insulation Resistance: 500 Megohms Minimum At DC 500V
 Contact Resistance : 30 Milliohms Maximum
 Operating Temperature : -55°C To +105°C
 Contact : Phosphor Bronze,Gold Flash
 Insulator :P.B.T. UL 94V-0 Rated
 Shell : Brass,Nickel Plated
 Hood : P.B.T. UL 94V-0 Rated

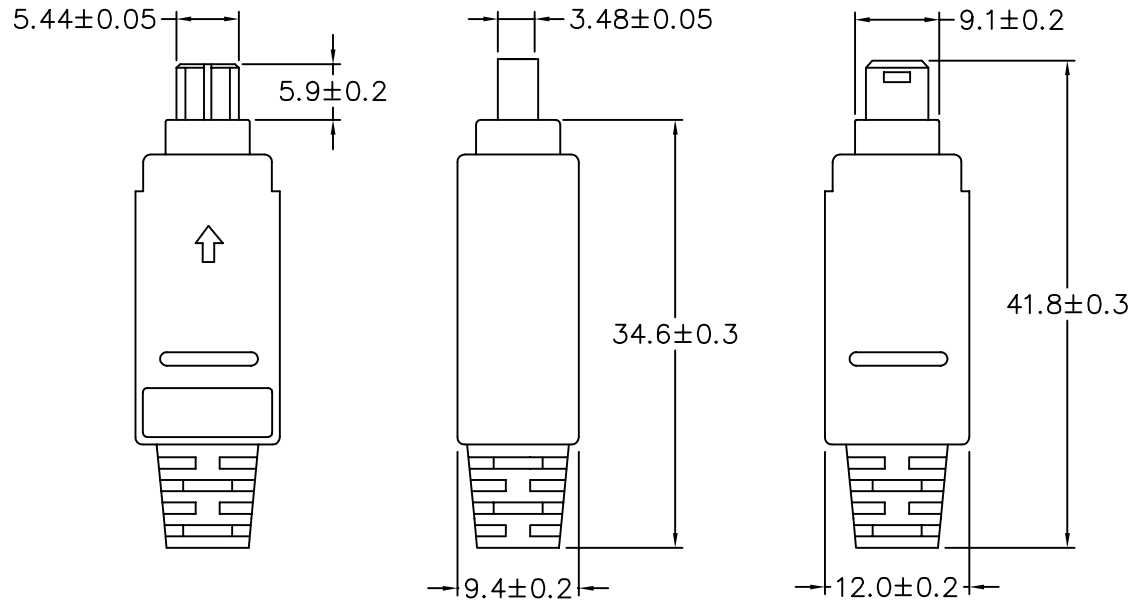

AUK A NUMBER OF AUK GROUP
太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

DRAWING No.
 FW1X04PA

APPROVED BY
 MEI
 CHECKED BY
 RAN
 DRAWING BY
 HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE REV. A UNIT mm

AREA REVISIONS CHK DATE