

## ALPHANUMERIC/GRAPHIC DOT MATRIX DISPLAYS

		2.3" 5 X 8 Dot Matrix Displays						
Part Number	Description	Source Color	Wave-length $\lambda_p$ (nm)	Segment Color	Face Color	Forward Voltage $V_F$ (V) typ max	Luminous Intensity $I_V$ ( $\mu$ cd) min typ	
GMA2985C	Common Anode, Row		635	White	Grey	2.1 2.8	3000	
GMC2985C	Common Cathode, Row			Diffused				
GMA2485C	Common Anode, Row		565	White	Grey	2.1 2.8	3000	
GMC2485C	Common Cathode, Row			Diffused				
GMA2885C	Common Anode, Row	Yellow	585	White	Grey	2.1 2.8	3000	
GMC2885C	Common Cathode, Row			Diffused				
GMA2285C	Common Anode, Row		660	White	Grey	1.8 2.5	5000	
GMC2285C	Common Cathode, Row			Diffused				


		Part Number	Notes
GMC2X85C	GMA2X85C	GMA2985C	4, 36
		GMC2985C	4, 36
		GMA2485C	4, 36
		GMC2485C	4, 36
		GMA2885C	4, 36
		GMC2885C	4, 36
		GMA2285C	4, 36
		GMC2285C	4, 36

### Notes

4.  $V_F$  &  $I_V$  @  $I_F = 20$  mA
36. XXXXXX represents the product part number, MYY is the date code, and Z refers to the light intensity category for the product.  
HER = High Efficiency Red

**ALPHANUMERIC/GRAPHIC DOT MATRIX DISPLAYS**

2.3" 5 X 8 Dot Matrix Displays							
Part Number	Description	Source Color	Wave-length $\lambda_p$ (nm)	Segment Color	Face Color	Forward Voltage $V_F$ (V) typ max	Luminous Intensity $I_V$ ( $\mu$ cd) min typ
GMA2685C	Common Anode, Row		635 565	White Diffused	Grey	2.1 2.8	3000

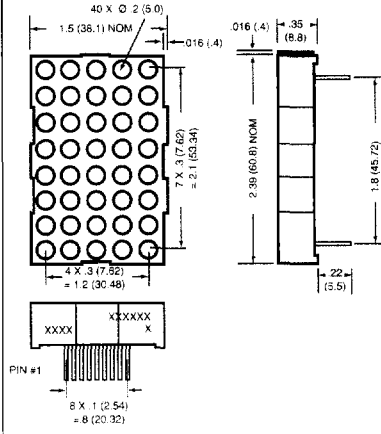

	Part Number	Notes
	<p>GMA2685C</p> <p>a = HER die b = Green die</p>	GMA2685C