

Helping Customers Innovate, Improve & Grow



VX-507

Features

- Frequency Range: 1 MHz to 800 MHz
- 9x14 J-Leaded Surface Mount Package
- AC MOS, LVPECL
- 4-point crystal mount for Harsh Environment Applications
- Shock and Vibration Resistance
- Military Temperature Range Option
- No pure tin is used in this product
- ECCN: EAR99
- COO: USA

Applications

- Mobile Data Communications
- Military Portable Radio
- Satellite Communications
- Airborne Equipment
- Avionics
- Marine/Land Seismic

Performance Specifications

Parameter	Min	Typ	Max	Units	Condition
Frequency Stabilities¹					
vs. operating temperature range (absolute pull range)					0...70°C -40...+85°C -55...+125°C
vs. supply voltage change	-2		+2	ppm	Vs ± 5%
vs. load change	-1		+1	ppm	Load ± 5%
vs aging / 1 year	-5	±3	+5	ppm	
vs aging / year (following years)	-1		+1	ppm	
Supply Voltage (Vs)					
Supply voltage	4.75	5.0	5.25	VDC	
Current consumption			15 20 40 100	mA mA mA mA	ACMOS 1 to 23.9 MHz ACMOS 24 to 49.9 MHz ACMOS 50 to 80.0 MHz LVPECL No load
Supply voltage	3.135	3.3	3.465	VDC	
Current consumption			6 8 12 16 60 100	mA mA mA mA mA mA	ACMOS 1.0 to 14.90 MHz ACMOS 15.0 TO 39.9 MHz ACMOS 40.0 TO 59.9 MHz ACMOS 60.0 TO 79.9 MHz ACMOS 80.0 to 125.0 MHz LVPECL No load

Performance Specifications


Parameter	Min	Typ	Max	Units	Condition
RF Output					
Signal	ACMOS				
Load		15	50	pF	
Signal Level (Vol)			0.5 0.3	VDC VDC	Vs= 5.0V and 15pF load Vs= 3.3V and 15pF load
Signal Level (Voh)	4.5 3.0			VDC VDC	Vs= 5.0V and 15pF load Vs= 3.3V and 15pF load
Rise and fall times for ACMOS (measured 10% to 90%)			10 5 3	ns ns ns	1.0 to 23.9 MHz 24.0 to 79.7 MHz 80.0 to 125.0 MHz
Duty cycle	45 40		55 60	% %	@ 50% < 15 MHz @ 50% >= 15 MHz
Signal	PECL/LVPECL				
Load			50	ohm	Into Vs-2V or There in Equivalent
Signal Level (Vol)			Vs -1.62	VDC	
Signal Level (Voh)	Vs -1.025			VDC	
Rise and fall times (measured 20% to 80%)			1000 600	ps ps	<100 MHz >100 MHz
Start-up Time			10	ms	
Duty cycle (LVPECL)	45 40		55 60	% %	@ 50% Vdd @ 50% Vdd
Jitter (rms)			5 1	ps ps	BW = 10Hz to 20 MHz BW = 12 kHz to 20 MHz
Period Jitter (pk-pk)			40	ps	10,000 samples- Rising edge
Frequency Tuning (EFC)					
Absolute Pull Range		±30 ±50		ppm ppm	
Linearity		10	15	%	
Tuning Slope	Positive				
Control Voltage Range	0.5 0.3	2.5 1.65	4.5 3.0	VDC VDC	with Vs=5.0VDC with Vs=3.3VDC
Additional Parameters					
Phase Noise ³ (typical @ 77.76 MHz)			-80	dBc/Hz	10 Hz
			-110	dBc/Hz	100 Hz
			-130	dBc/Hz	1 KHz
			-150	dBc/Hz	10 KHz
			-160	dBc/Hz	100 KHz
Phase Noise ³ (typical @ 155.52 MHz)			-70	dBc/Hz	10 Hz
			-100	dBc/Hz	100 Hz
			-125	dBc/Hz	1 kHz
			-145	dBc/Hz	10 KHz
			-155	dBc/Hz	100 KHz
Screening	Vectron Verification or Class B Screening I/A/W MIL-PRF55310				

Performance Specifications

Parameter	Min	Typ	Max	Units	Condition
Weight			<2.0	g	
Processing & Packing					Handling & processing note
Output Enable ⁶	Logic "0" input = Outputs disabled (Tri-state) Logic "1" or floating input = Outputs enabled)				ACMOS Output
	Logic "0" or floating input = Outputs enabled) Logic "1" input = Outputs disabled (Tri-state)				PECL/LVPECL Output
Absolute Maximum Ratings					
Supply voltage (Vs)			7.0	V	with Vs=5.0 and 3.3 VDC
Operable temperature range	-55		+125	°C	
Storage temperature range	-55		+125	°C	

Environmental Compliance	
Mechanical Shock	MIL-STD-883, Method 2002.5, Condition C (3000 g)
Random Vibration	MIL-STD-883, Method 2026, Condition J (36.6 g)
Sine Vibration	MIL-STD-202, Method 204, Condition G (30 g)
Seal Test	MIL-STD-883 Method 1014 Condition A2 (Fine)
Seal Test	MIL-STD-202 Method 112 Condition D (Gross)
Temperature Cycling	MIL-STD-883 Method 1010 Condition B (1000 Cycles)
Acceleration	MIL-STD-883 Method 2001 Condition A (5000 g, Y1 Plane)
Thermal Shock	MIL-STD-883, Method 107, Condition B
Solderability	MIL-STD-202, Method 208
Leak Test (Fine and Gross)	MIL-STD-883, Method 1014, Condition A1 and C1

Recommended Reflow Profiles for Pb-Free & Sn-Pb

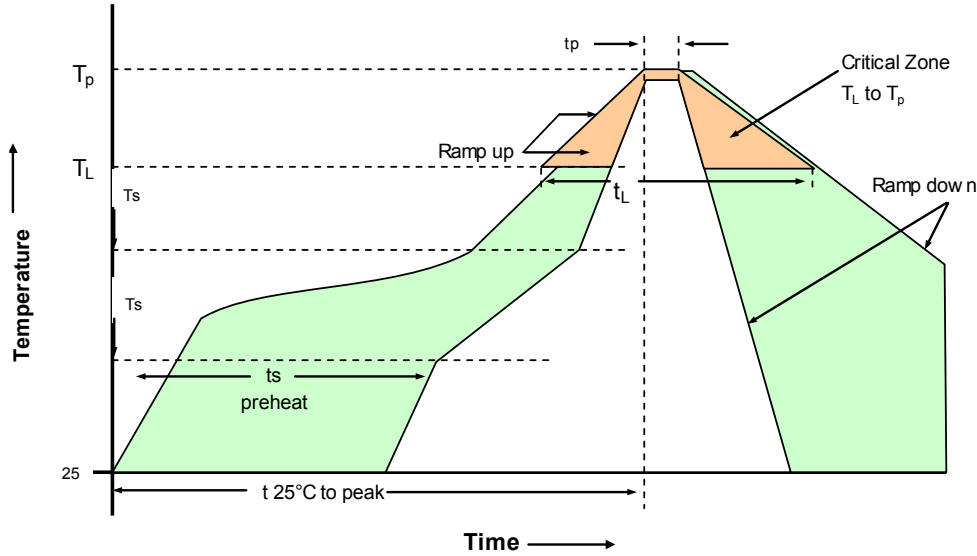

230°C Reflow Profile

Profile Feature	Sn-Pb Assembly	Profile Feature	Sn-Pb Assembly
Average ramp-up rate (TL to TP)	3°C/secod max.	Time 25°C to Peak Temperature	4 minutes max.
Preheat - Temperature min T _{sm} - Temperature Min T _{smax} - Time (min to max) (ts)	135°C 155°C 60-90 seconds	Time maintained above - Temperature (TL) - Time (tL)	183°C 45-60 seconds
T _{smax} to TL -Ramp-up Rate	3°C/secod max.		
Time maintained above - Temperature (TL) - Time (TL)	183°C 40-60 seconds	Time within 5°C of actual Peak Temperature (tp)	10-20 seonds max.
Peak Temperature (Tp)	max 230°C	Ramp-down Rate	6°C/second max.

Note: All temperatures refer to topside of the package, measured on the package body surface.


260°C Reflow Profile

Profile Feature	Pb-Free Assembly	Profile Feature	Pb-Free Assembly
Average ramp-up rate (TL to TP)	3°C/secod max.	Time 25°C to Peak Temperature	8 minutes max.
Preheat - Temperature min T _{sm} - Temperature min T _{smax} - Time (min to max) (ts)	150°C 200°C 60-180 seconds	Time maintained above - Temperature (TL) - Time (tL)	217°C 60-150 seconds
T _{smax} to TL -Ramp-up Rate	3°C/secod max.		
Time maintained above - Temperature (TL) - Time (TL)	217°C 60-150 seconds	Time within 5°C of actual Peak Temperature (tp)	20-40 seonds max.
Peak Temperature (Tp)	max 260°C	Ramp-down Rate	6°C/second max.

Note: All temperatures refer to topside of the package, measured on the package body surface.

Outline Drawing / Enclosure


Dimensions: Inches (mm)

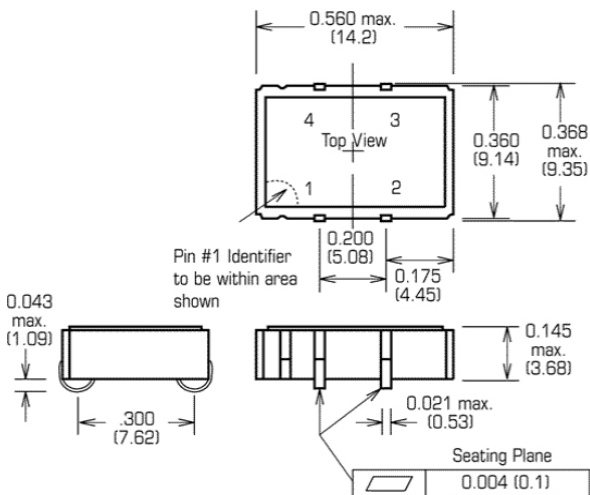

Type A (4-Leads) ACMOS/TTL		
Code	Height "H"	Pin Length
0	3.68	1.09

Pin Connections	
1	VCXO input
2	Ground (Case)
3	RF Output
4	Supply

Dimensions: Inches (mm)

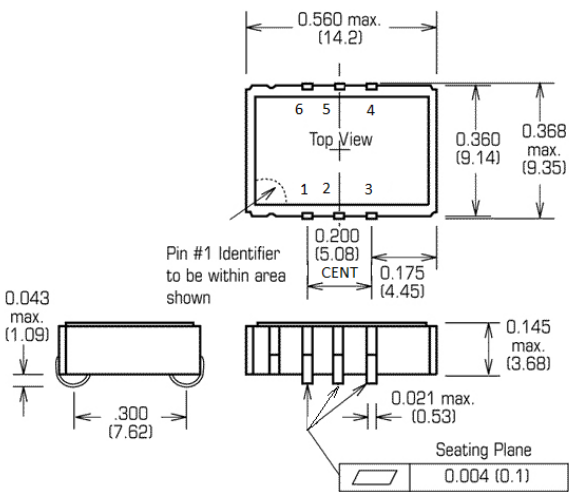

Type B (6-Leads) ACMOS/TTL		
Code	Height "H"	Stand-off
1	3.68	1.09


Pin Connections	
1	VCXO input
2	Enable/Disable or N/C
3	Ground (Case)
4	RF Output
5	N/C
6	Supply Voltage

Type B (6-Leads) PECL/LVPECL		
Code	Height "H"	Stand-off
1	3.68	1.09

Pin Connections	
1	VCXO input
2	Enable/Disable or N/C
3	Ground (Case)
4	RF Output
5	Complementary Output
6	Supply Voltage

Ordering Information

VX - 507 0 - D A T - K X X X - 10M0000000

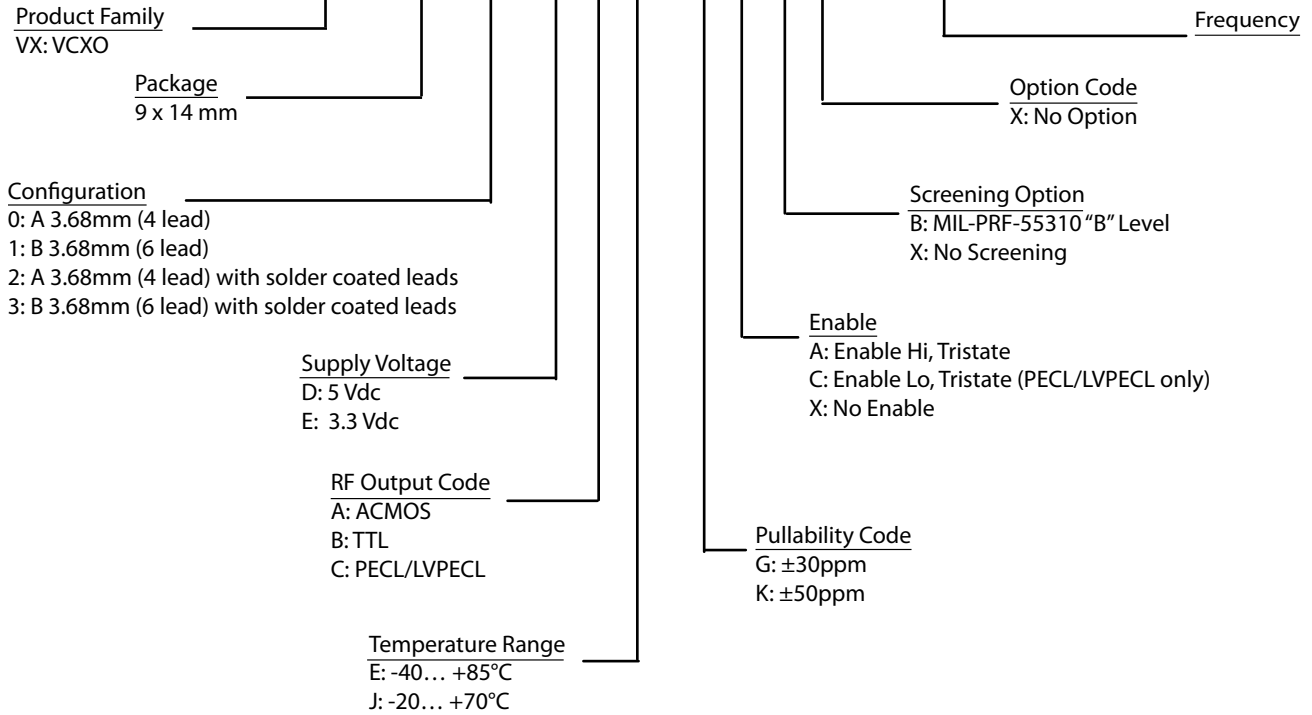

Notes:

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.
6. Output enable option only available for type B (6-Leads) device.

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road, Unit 102
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 3328.4784.17
Fax: +49 (0) 3328.4784.30

Asia:

Vectron International
68 Yin Cheng Road(C), 22nd Floor
One LuJiaZui
Pudong, Shanghai 200120, China
Tel: 86.21.6194.6886
Fax: 86.21.6194.6699

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.