

STRAIGHT PLUG with basket weave cable grip



To specify a complete plug, substitute the Dash No. of the contact insert selected, for the Asterisk (*) in the Catalog No. below. NOTE: The jack nut should not be used with current rupture insert configurations.

A PLUG WITH JACK COUPLING NUT SHOULD BE USED WITH INSERTS HAVING 37 OR MORE CONTACTS


Size Cable	Shell Size	Cat. No. With Standard Coupling Nut	DIMENSIONS WITH STANDARD CABLE ADAPTER			Cat. No. With Jack Coupling Nut
			A	B	C	
Select from Table Below and Substitute Symbol No. for Delta Δ	12	ZPLK-Δ 12-*	5 3/8	1 13/16	5 31/32	ZPLKJ-Δ 12-*
	16	ZPLK-Δ 16-*	5 5/8	2 5/16	6 7/32	ZPLKJ-Δ 16-*
	20	ZPLK-Δ 20-*	6 1/8	2 13/16	6 23/32	ZPLKJ-Δ 20-*
	C20	ZPLK-Δ C20-*	6 5/8	2 13/16	7 7/32	ZPLKJ-Δ C20-*
	24	ZPLK-Δ 24-*	6 5/8	3 5/16	7 7/32	ZPLKJ-Δ 24-*
	C24	ZPLK-Δ C24-*	7 1/8	3 5/16	7 23/32	ZPLKJ-Δ C24-*
	28	ZPLK-Δ 28-*	7 1/8	3 13/16	7 23/32	ZPLKJ-Δ 28-*
	C28	ZPLK-Δ C28-*	7 5/8	3 13/16	8 7/32	ZPLKJ-Δ C28-*
WITH LONG CABLE ADAPTER						
	12	ZPLKL-Δ 12-*	7 5/8	1 13/16	8 7/32	ZPLKLJ-Δ 12-*
	16	ZPLKL-Δ 16-*	7 7/8	2 5/16	8 15/32	ZPLKLJ-Δ 16-*
	20	ZPLKL-Δ 20-*	8 3/8	2 13/16	8 31/32	ZPLKLJ-Δ 20-*
	C20	ZPLKL-Δ C20-*	8 7/8	2 13/16	9 15/32	ZPLKLJ-Δ C20-*
	24	ZPLKL-Δ 24-*	8 7/8	3 5/16	9 15/32	ZPLKLJ-Δ 24-*
	C24	ZPLKL-Δ C24-*	9 3/8	3 5/16	9 31/32	ZPLKLJ-Δ C24-*
	28	ZPLKL-Δ 28-*	9 1/8	3 13/16	9 23/32	ZPLKLJ-Δ 28-*
	C28	ZPLKL-Δ C28-*	9 5/8	3 13/16	10 7/32	ZPLKLJ-Δ C28-*

Types
ZPLD
ZPED

SEE CABLE GRIP
COMPONENTS PAGE
FOR BASKET WEAVE
GRIP LENGTHS.

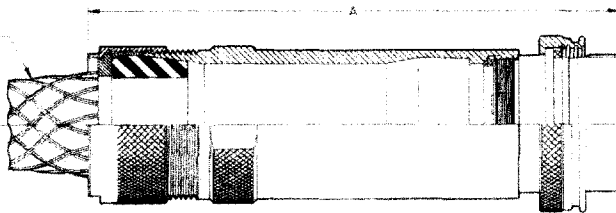

SAFETY WIRE HOLES
(3) .062 DIA.

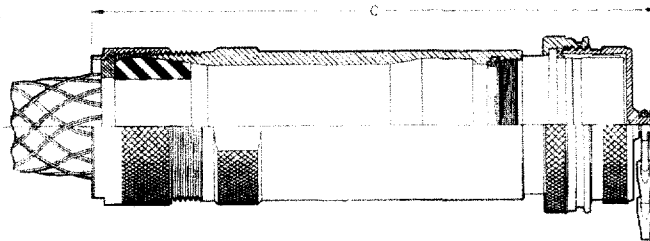

To specify plug with environmental cover,
change third letter in Part No. "L" to "E".
Example: ZPLK changes to ZPEK.

OIL-RESISTANT RUBBER GROMMETS—SYMBOL NUMBERS OF SIZES AVAILABLE

Substitute the symbol number for the Delta Δ in the Catalog Number of Plug.
Example: ZPLK-Δ 12-* for .500 to .625 Dia. Cable changes to ZPLK-10 12-*

Cable Dia.	Shell 12	Shell 16	Shells 20 & C20	Shells 24 & C24	Shells 28 & C28	Cable Dia.	Shell 12	Shell 16	Shells 20 & C20	Shells 24 & C24	Shells 28 & C28
.062 to .125	02	..	..	..	..	1.500 to 1.625	..	..	26	26	26
.125 to .250	04	..	..	..	..	1.625 to 1.750	..	..	28	28	28
.250 to .375	06	06	..	..	..	1.750 to 1.875	..	..	30	30	30
.375 to .500	08	08	..	..	..	1.875 to 1.937	..	..	31	..	..
.500 to .625	10	10	10	..	..	1.875 to 2.000	..	..	..	32	32
.625 to .750	12	12	12	..	..	2.000 to 2.125	..	..	..	34	34
.750 to .875	14	14	14	..	..	2.125 to 2.250	..	..	..	36	36
.875 to .937	15	..	..	..	..	2.250 to 2.375	..	..	..	38	38
.875 to 1.000	..	16	16	16	..	2.375 to 2.437	..	..	..	39	..
1.000 to 1.125	..	18	18	18	..	2.375 to 2.500	..	..	..	..	40
1.125 to 1.250	..	20	20	20	..	2.500 to 2.625	..	..	..	..	42
1.250 to 1.375	..	22	22	22	..	2.625 to 2.750	..	..	..	..	44
1.375 to 1.437	..	23	..	..	..	2.750 to 2.875	..	..	..	..	46
1.375 to 1.500	..	..	24	24	24						