



**Part Number: HGRM-55211-ICO**  
**Magnetic Reed Relay - One pole - Form C - Mercury wetted contact**  
**Product Data Sheet**

**DIMENSIONS**

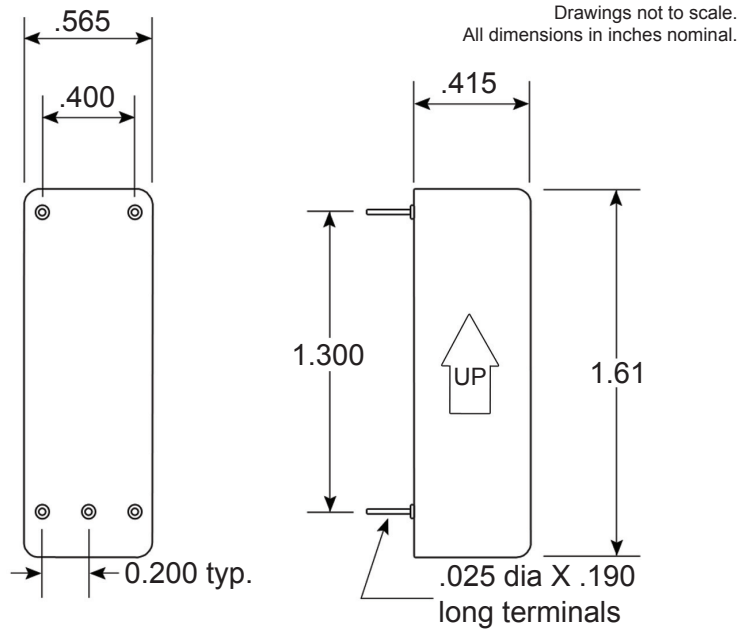

**CIRCUIT DIAGRAM**

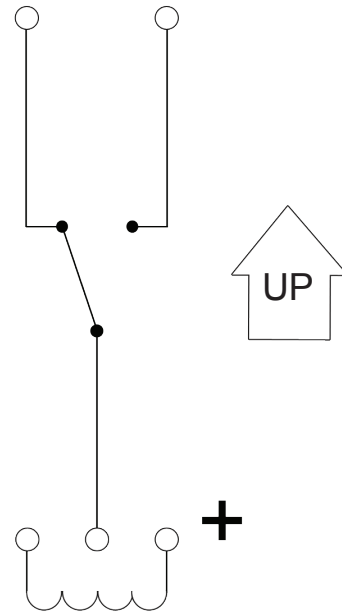

**TERMINALS / TOLERANCES**

Diameter: 0.025     .XXX = ± 0.010  
 Length: 0.190     .XX = ± 0.015

**FEATURES**

- Resistant to Ambient Environmental Conditions
- Material : Metal
- Mechanical Stress Resistant
- Antivibration Feature
- Magnetic Shield

CONTAINS MERCURY (DISPOSE ACCORDINGLY)

**SPECIFICATION**

Maximum Switching Power	VA / Watts	100
Maximum Switching Current	Amps AC/DC	2.0
Maximum Switching Voltage	Volts AC/DC	500
Breakdown Voltage	Volts AC	1000
Coil Resistance (+/- 10% @25°C)	Ohms	335
Nominal Coil Voltage	VDC	5
Pull-In Voltage MAX	VDC	3.5
Drop-Out Voltage MIN	VDC	0.4
Dielectric	coil / case	1000
	coil / cont	1000
	cont / cont	1000
Adjustment		Single Side Stable

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

**Phone: (1) 973 777 6900**

**www.comus-intl.com**

**Fax: (1) 973 777 8405**