

LOC	DIST	REVISIONS				
AJ	16	P	LTR	DESCRIPTION	DATE	OWN
		A		REVISED PER EC OS14-0150-05	30AUG05	JL

- 1

BERYLLIUM COPPER PER ASTM-B-194
- 2

BRASS PER ASTM-B-16
- 3

PTFE PER MIL-P-19468
- 4

SILICONE RUBBER PER ZZ-R-765
- 5



ZINC DIE CAST PER ASTM-B-86
- 6

GOLD PLATE PER MIL-C-45204,
0.76µm [.000030] MIN THICKNESS
- 7

NICKEL PLATE PER QQ-N-290,
1.27µm [.000050] MIN THICKNESS
- 8

NICKEL PLATE PER QQ-N-290,
2.54µm [.000100] MIN THICKNESS
- 9

TIN PLATE PER ASTM-B-545,
2.54 µm [.000100] MIN THICK.

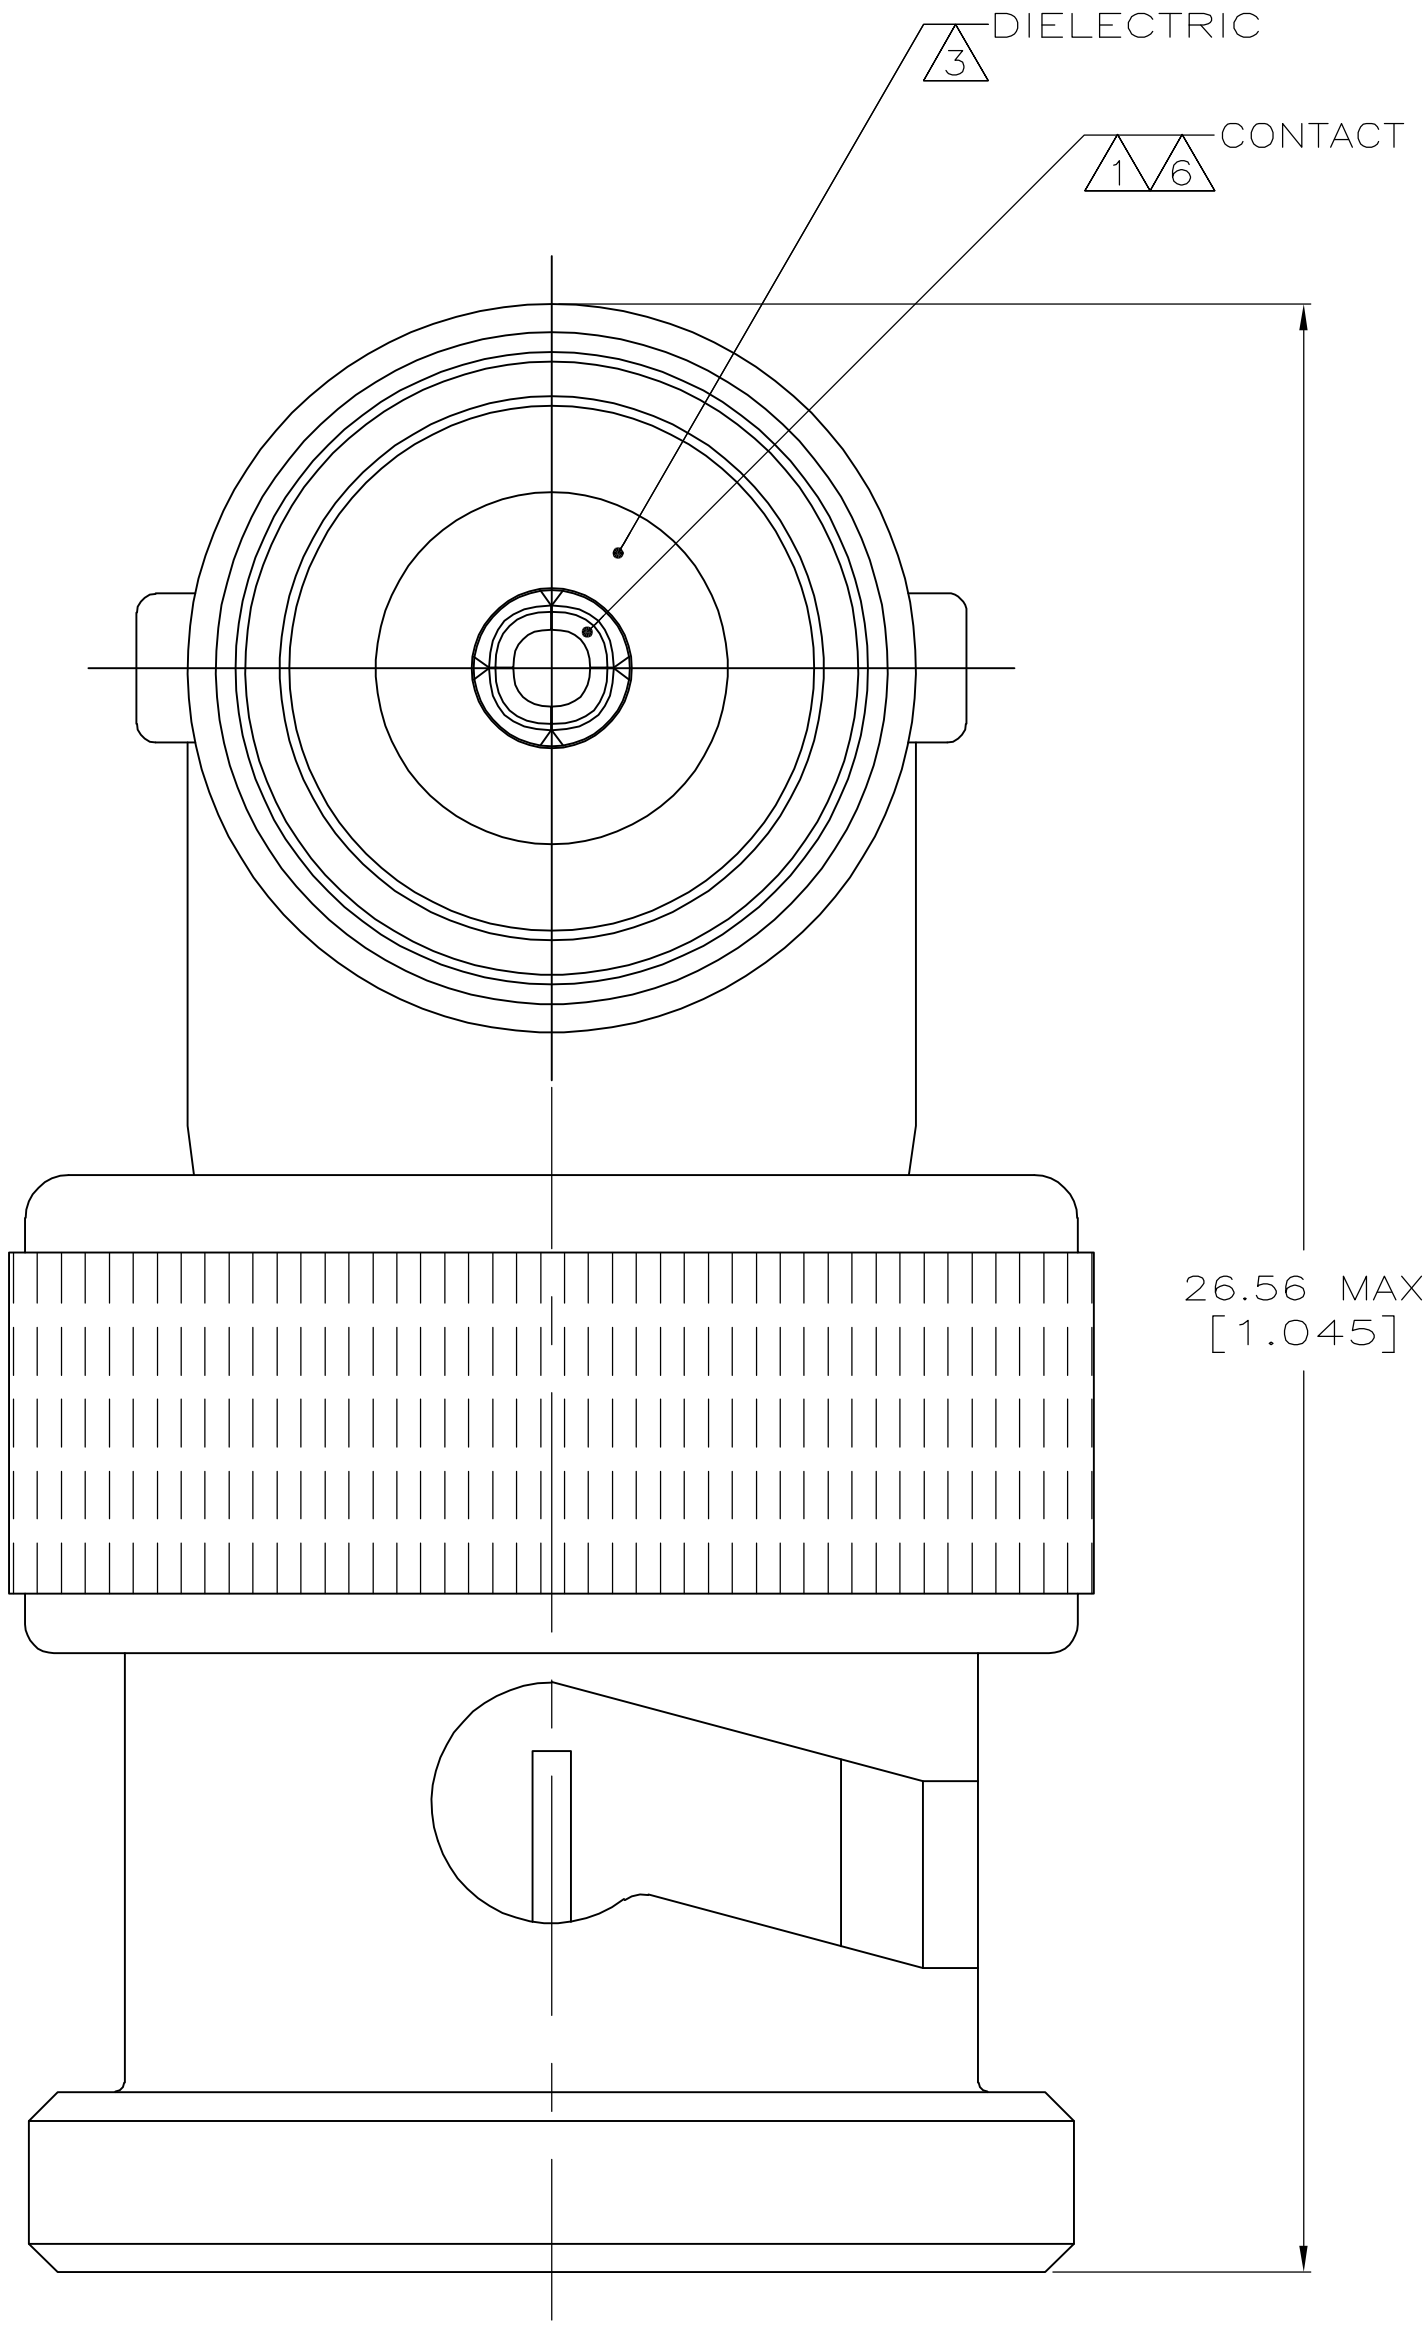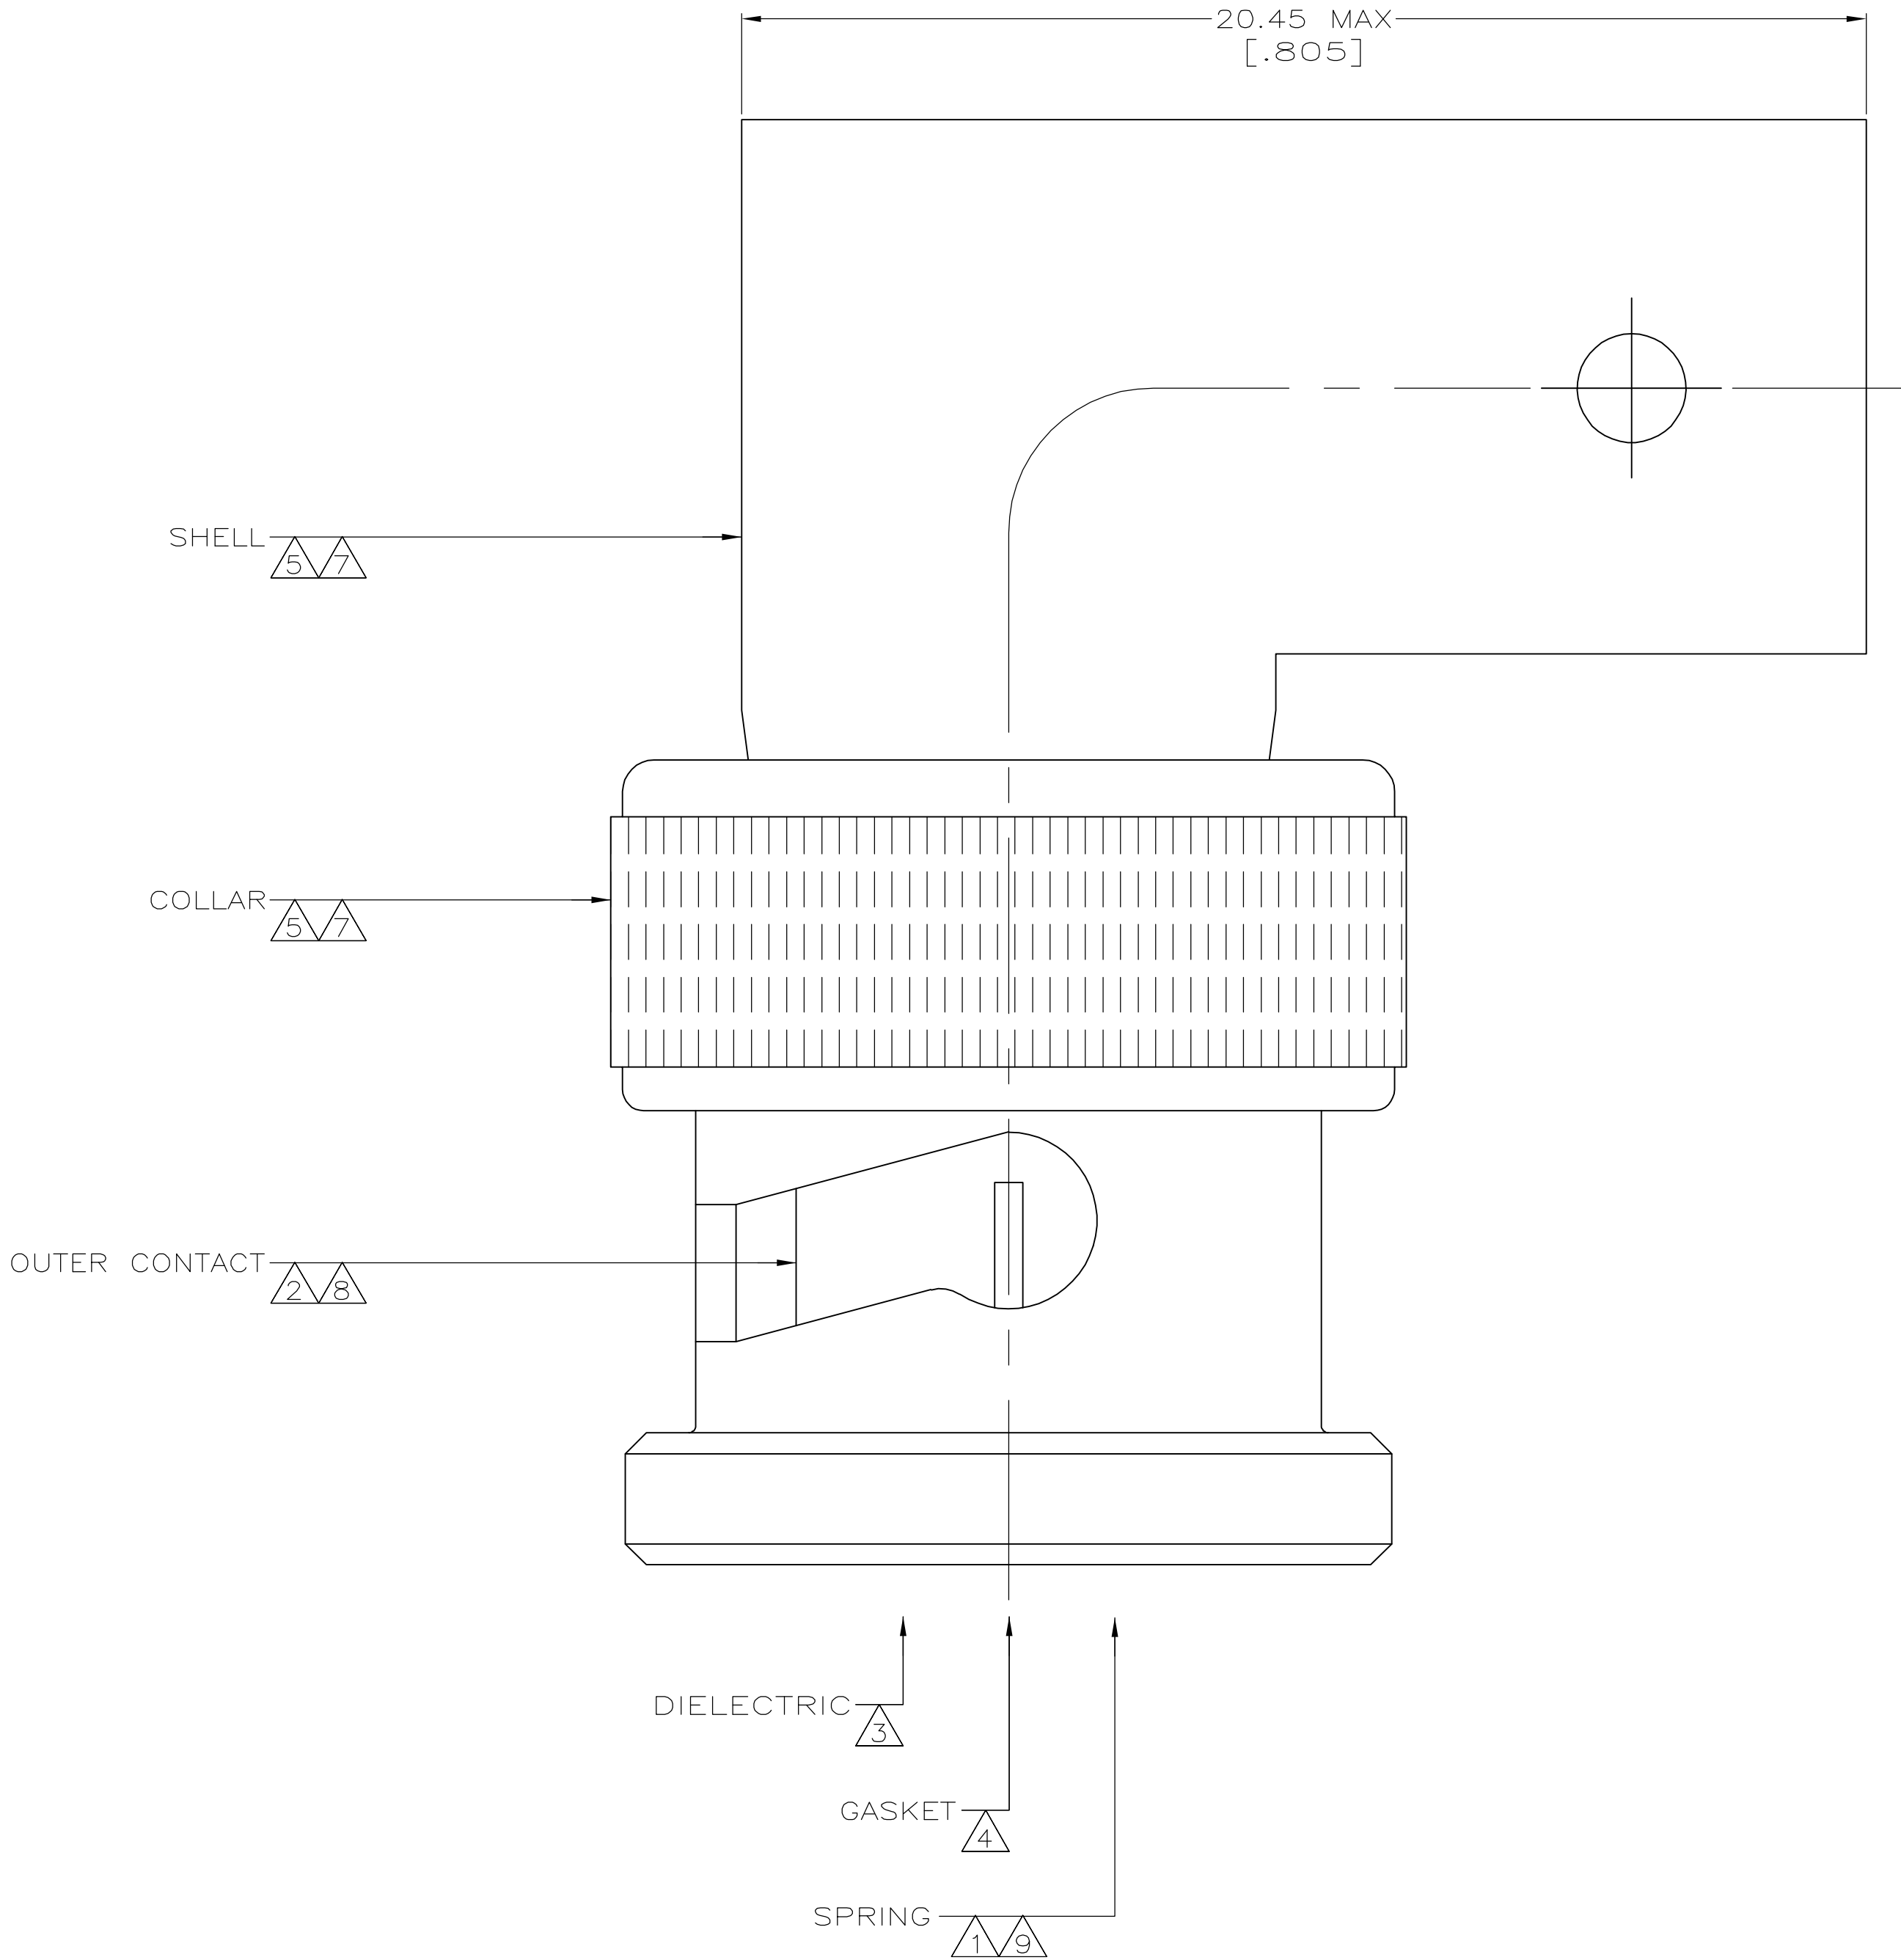

5222165-2

PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA — 22APR2005	tyco <i>Electronics</i>	Tyco Electronics Corporation		
		CHK J. HAVENER — 22APR2005		Harrisburg, Pa 17105-3608		
		APP'D J. LIPPERT — 22APR2005		NAME PLUG-JACK ADAPTER, RIGHT ANGLE, BNC		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO			
	0 PLC ± —	APPLICATION SPEC				
	1 PLC ± —	—				
MATERIAL SEE NOTES	FINISH SEE NOTES	WEIGHT —	A1	00779	C5222165	—
CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1	REV A		