


A	Dept	
	Qty	
	DC	1
	ED	1
	IE	1
	ISO	1
B	PD	1
	R&D	1
	SD	1
	QA	1
	QC	1
	QE	1

NOTES:


- 1. Mechanical
 - 1.1 Operation Force: 800g Max
 - 1.2 Stroke: 1.90mm
 - 1.3 Temperature Range: -40°C~+105°C
- 2. Materials
 - 2.1 Base: Engineering Plastics, Black
 - 2.2 Cover: Engineering Plastics, Red or Blue
 - 2.3 Actuator: Engineering Plastics, White
 - 2.4 Contact: Copper Alloy, Gold plating
- 3. Electrical
 - 3.1 Electrical Life: 2000 cycles.
 - 3.2 Contact resistance: 100mΩ Max.
 - 3.3 Insulation Resistance: 1000MΩ at 500VDC.
 - 3.4 Dielectric Withstanding Voltage: 500VAC per 1 minute
 - 3.5 Circuit: Single pole single throw
 - 3.6 Current Rating: 100mA
 - 3.7 Voltage Rating: 24V AC/DC


DS1040 - X X X

- Housing Type
 - N: Regular
- Housing color
 - R: Red
 - B: Blue
 - K: Black
 - N: Brown
- Positions
 - 01,02,03,04,05,06,07,08,09,10,11,12

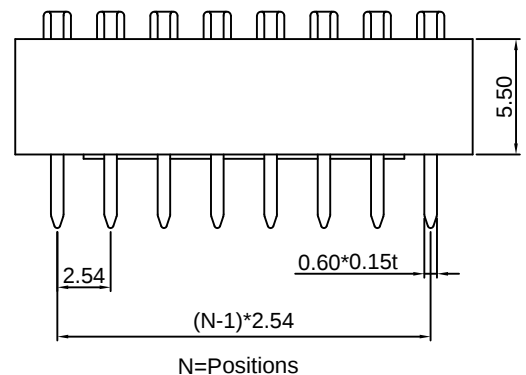

Top-down view of the robot showing a width of 7.62 inches and a height of 3.3 inches.

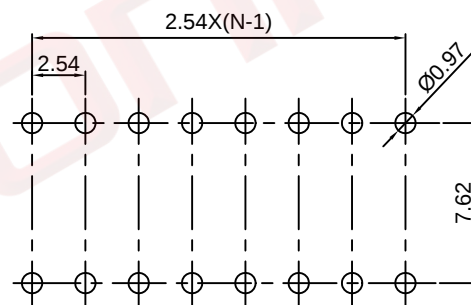

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm DIP SWITCH	
X.	±0.60	X.	±5°	UNITS	mm	Regular Type		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1040 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONFLY CONFLY ELECTRONIC CO. LTD				
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1040-XXN-E							

